Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

TECKNET TK-KB008

TECKNET TK-KB008 Wireless Bluetooth Keyboard User Manual

Model: TK-KB008

Introduction

This manual provides detailed instructions for the setup, operation, and maintenance of your TECKNET TK-KB008 Wireless Bluetooth Keyboard. Please read this manual thoroughly before using the product to ensure optimal performance and longevity.

Package Contents

- TECKNET TK-KB008 Wireless Bluetooth Keyboard
- USB Receiver (stored in the keyboard's back compartment)
- USB-C Charging Cable
- User Manual



Image: The TECKNET TK-KB008 Wireless Bluetooth Keyboard shown with its accompanying USB receiver.

Product Overview

The TECKNET TK-KB008 is a slim, rechargeable wireless keyboard designed for multi-device compatibility and quiet typing. It supports both 2.4G wireless and Bluetooth 5.0 connections, allowing seamless switching between up to three devices.

Key Features:

- **Multi-Device Connectivity:** Connects to up to 3 devices via Bluetooth 5.0 or 2.4G USB receiver.
- **USB-C Rechargeable:** Built-in 500mAh battery provides up to 90 days of use on a 2-hour charge.
- **Compact & Portable:** Measures 29x13x1.5cm and weighs 340g, ideal for travel and small workspaces.
- **Quiet Typing:** Features an upgraded scissor-key structure for silent and responsive keystrokes.
- **Multimedia Hotkeys:** 14 dedicated keys for quick access to media controls and system functions.
- **Ergonomic Design:** 8° tilt for comfortable typing during extended use.

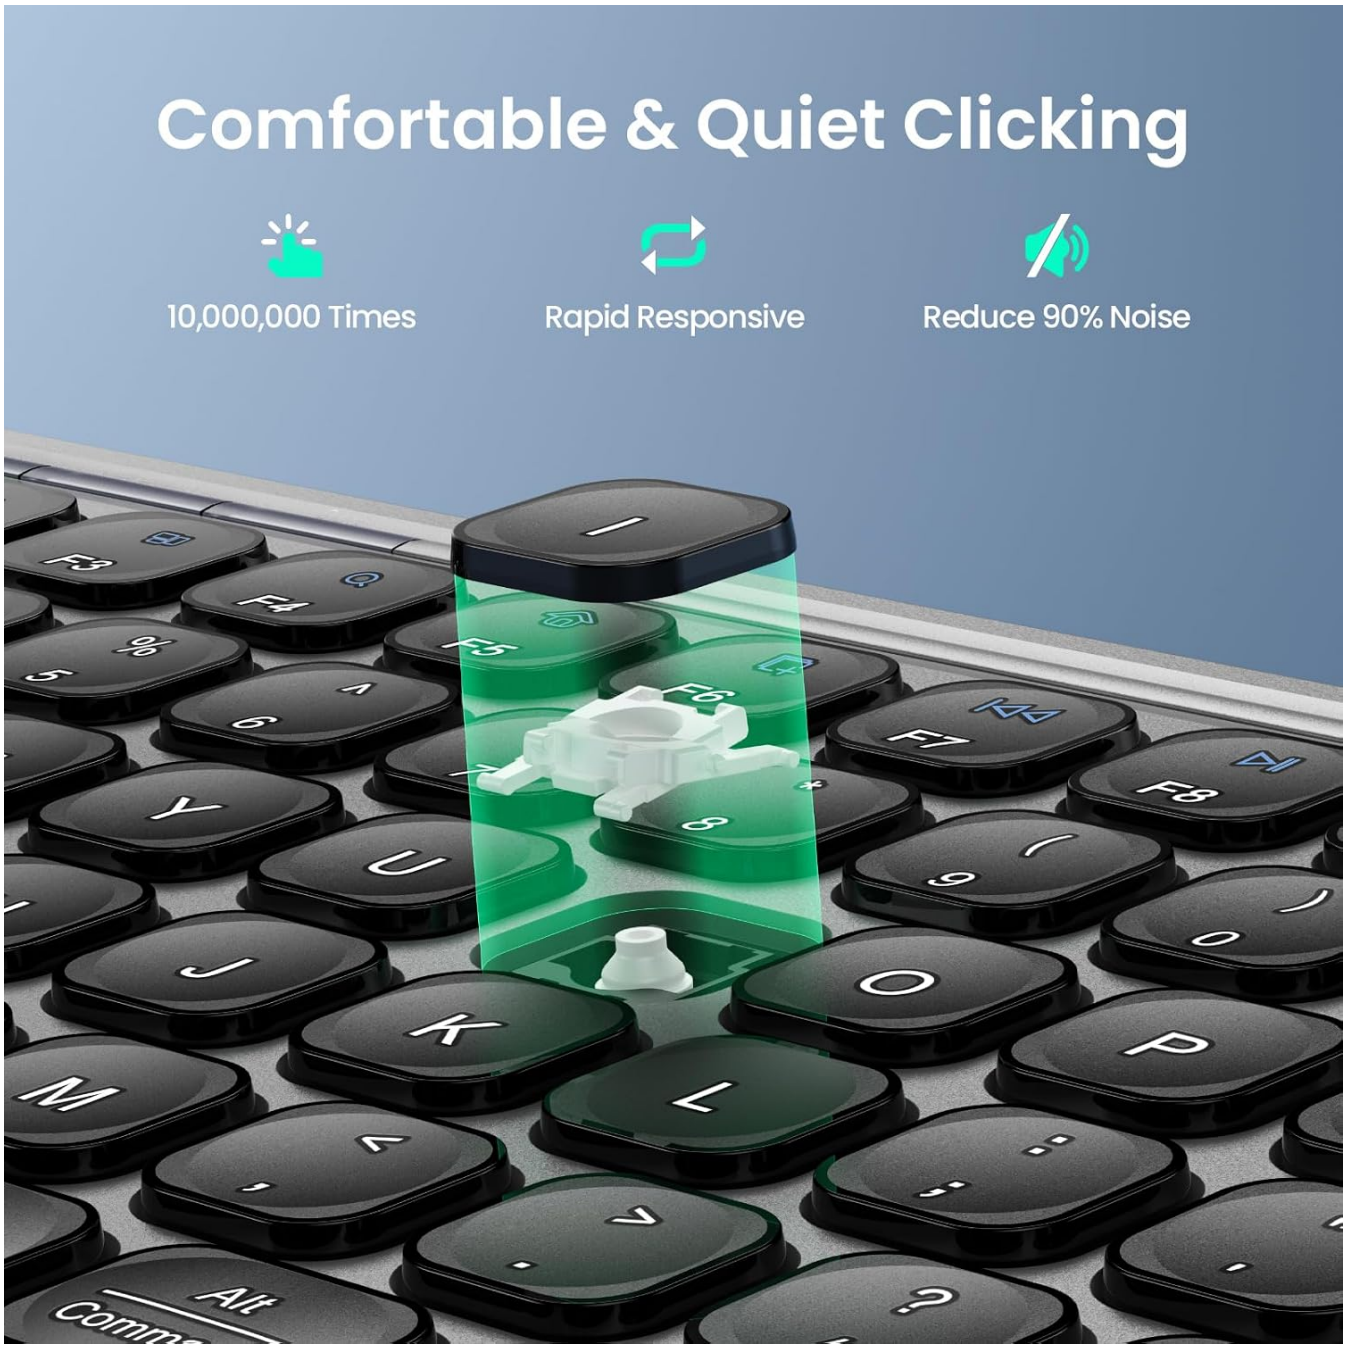


Image: Overview of the keyboard's 14 multimedia hotkeys for enhanced productivity.

Setup & Connection

1. 2.4G Wireless Connection

1. Locate the USB receiver stored in the back compartment of the keyboard.
2. Turn on the keyboard using the power switch located on the side.
3. Press and hold the **Fn + 1** keys for 3 seconds until the first indicator light (2.4G) flashes green.
4. Insert the USB receiver into an available USB-A port on your computer.
5. The indicator light will turn solid green for 3 seconds and then turn off, indicating a successful connection.

2. Bluetooth Connection (BT1/BT2)

1. Turn on the keyboard using the power switch.
2. For BT1, press and hold **Fn + 2** for 3 seconds until the second indicator light (BT1) flashes.
3. For BT2, press and hold **Fn + 3** for 3 seconds until the third indicator light (BT2) flashes.

4. On your device (laptop, tablet, phone), enable Bluetooth and search for "TK-KB008" in the list of available devices.
5. Select "TK-KB008" to pair. The indicator light will turn solid for 3 seconds and then turn off upon successful connection.

Note: The keyboard is compatible with Bluetooth versions 4.0 and above.



Image: The keyboard demonstrating its ability to connect to multiple devices via 2.4G USB-A and Bluetooth.

3. System Switching (2.4G Mode Only)

To optimize key functions for different operating systems when using 2.4G mode:

- Press **Fn + Q** to switch to Windows mode.
- Press **Fn + W** to switch to macOS mode.

In Bluetooth mode, the keyboard automatically detects the system, and no manual switching is required.
To check the current channel, press **Fn + Space**. The corresponding indicator light will flash 4 times.

Your browser does not support the video tag.

Video: Demonstrates how to connect the TECKNET TK-KB008 keyboard via 2.4G USB receiver and Bluetooth, including system switching.

Operation

Multimedia Hotkeys

The keyboard features 14 dedicated multimedia shortcut keys for quick access to various functions. These keys are activated by pressing the **Fn** key in combination with the corresponding F-key.

Key Combination	Function
Fn + F1	Decrease Brightness
Fn + F2	Increase Brightness
Fn + F3	Task View
Fn + F4	Search
Fn + F5	Show Desktop
Fn + F6	Print Screen
Fn + F7	Previous Track
Fn + F8	Play/Pause
Fn + F9	Next Track
Fn + F10	Mute/Unmute
Fn + F11	Volume Down
Fn + F12	Volume Up
Fn + Delete	Lock Screen
Fn + Q/W	Switching System (Windows/Mac)

Note: Limited shortcut compatibility - iPhone: FN+F3&F5/Delete not supported; Samsung S22: FN+F3 not supported.

Charging & Battery

The keyboard is equipped with a 500mAh rechargeable battery and a USB-C charging port. A full charge takes approximately 2 hours and provides up to 90 days of use.

- Connect the provided USB-C charging cable to the keyboard's charging port and a power source.
- The charging indicator light will be red while charging and turn green when fully charged.
- The keyboard features an energy-saving mode, automatically entering sleep after 30 minutes of inactivity. Press any key to wake it up (1-2 seconds).



Image: The keyboard connected via USB-C for charging, highlighting its long battery life.

Maintenance

- Clean the keyboard regularly with a soft, dry cloth.
- Avoid exposing the keyboard to extreme temperatures, humidity, or direct sunlight.
- Do not disassemble the keyboard, as this may void the warranty.
- Store the USB receiver in its designated compartment on the back of the keyboard when not in use to prevent loss.

Troubleshooting

Keyboard not connecting:

- Ensure the keyboard is powered on.
- Check if the USB receiver is properly inserted into your computer for 2.4G connection.

- For Bluetooth connection, ensure Bluetooth is enabled on your device and the keyboard is in pairing mode (indicator light flashing).
- Try restarting both the keyboard and your device.
- Ensure your device's Bluetooth version is 4.0 or higher.

Keys not responding:

- Check the battery level and charge the keyboard if necessary.
- Ensure the keyboard is within the operating range of your device (up to 10 meters).
- Verify that the correct system mode (Windows/macOS) is selected if using 2.4G.

Lag or delayed response:

- Reduce interference by moving closer to your device or away from other wireless devices.
- Ensure the keyboard is fully charged.

Specifications

Feature	Detail
Brand	TECKNET
Model	TK-KB008
Connectivity Technology	Bluetooth 5.0, 2.4G USB-A
Keyboard Description	Membrane, Scissor-key structure
Special Features	Lightweight, Portable, Rechargeable, Silent, 8° tilt design
Color	Gray
Material	Plastic
Power Source	Battery Powered (Rechargeable with USB-C)
Battery Capacity	500mAh
Battery Life	Up to 90 days (on 2-hour charge)
Item Weight	14.4 ounces (approx. 340g)
Package Dimensions	12.71 x 5.24 x 0.87 inches (approx. 29x13x1.5cm)
Compatible Devices	Laptop, PC, Tablet, Phone (Windows, macOS)

Warranty & Support

TECKNET provides a 36-month warranty for this product (registration may be required). If you encounter any problems or have questions regarding your TECKNET TK-KB008 Wireless Bluetooth Keyboard, please contact our professional customer service team for assistance.
For more information and support, visit the official TECKNET Store.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

What should I do if the 1, Q, A, and Z keys are not working on my TECKNET TK-KB008 keyboard?

If a specific vertical column of keys like 1, Q, A, and Z stops working on your TECKNET TK-KB008, it often indicates a hardware connection issue or a temporary software glitch. Please try the...

Read full answer

Open the live page

https://manuals.plus/asin/B0DJY8JH4S

More documents and user manuals: **https://manuals.plus/**