



elna 202-464-101 Bias Tape and Belt Loop Folder Instruction Manual

[Home](#) » [Elna](#) » elna 202-464-101 Bias Tape and Belt Loop Folder Instruction Manual 


elna 202-464-101 Bias Tape and Belt Loop Folder Instruction Manual



BIAS TAPE GUIDE + BELT LOOP FOLDER

Ref: 202-464-101

This attachment can be used as a «Bias Tape Guide» to easily attach single fold 1/2" (12.7 mm) wide bias tape to knit fabric for decoration, and as a «Belt Loop Folder» to make 7/16" (11 mm wide belt loops from 1" (25 mm) wide strips of fabric. Medium-heavy fabrics (10 oz denim or chino cloth, etc.) are recommended for creating the belt loop.

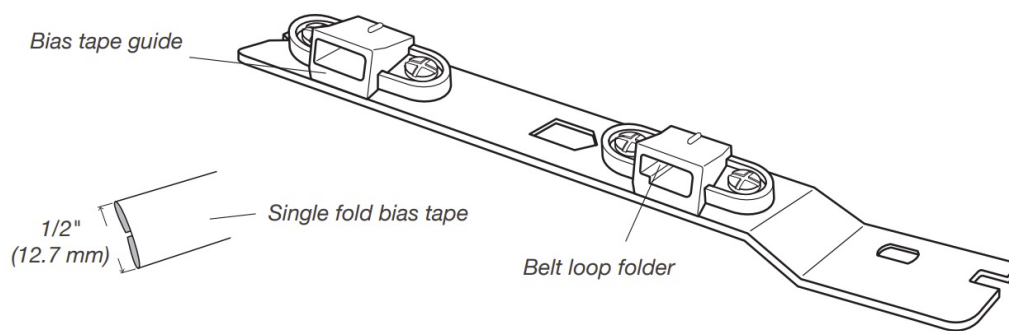

Caution

Turn the power switch off when attaching and detaching this attachment. information.

Machine setting:

Stitch pattern: Top cover stitch Wide 6 mm Cover stitch Wide 6 mm

* Please refer to your machine's instruction manual for details of setting the machine.

Contents


- 1 BIAS TAPE GUIDE
- 2 BELT LOOP FOLDER
- 3 Documents / Resources

BIAS TAPE GUIDE


To sew

Attach the attachment to the 2 holes on the right front of the machine with the attachment screws.


* Attachment screws (2 pcs.) are included in the standard accessories of your machine.

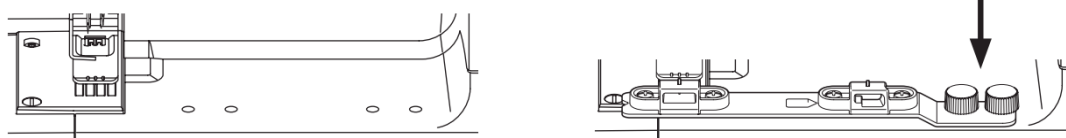

Be sure to set the attachment properly as shown below.

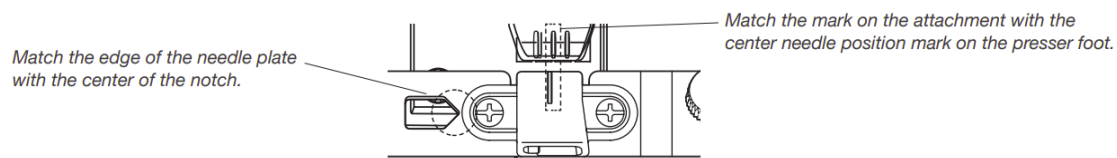


Pass the bias tape through the bias tape guide with the folded side facing down.

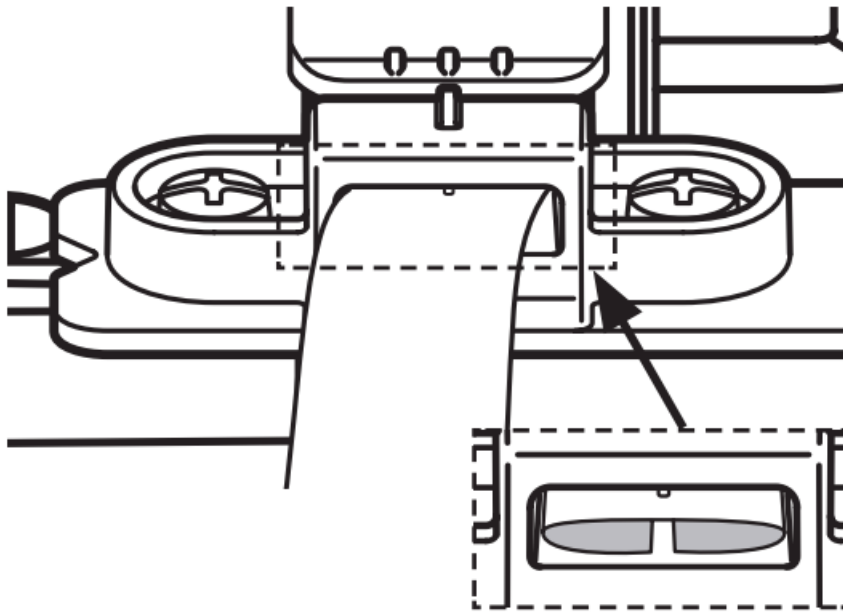


Slide the bias tape under the presser foot to the rear of the needle hole.

* When attaching the tape with top cover stitch, sew while pushing the bias tape or the edge of the fabric immediately following the extra piece of fabric so that there is no gap between the fabrics at the beginning of the seam.

Refer to the instruction manual for sewing the beginning of the seam with top cover stitch.

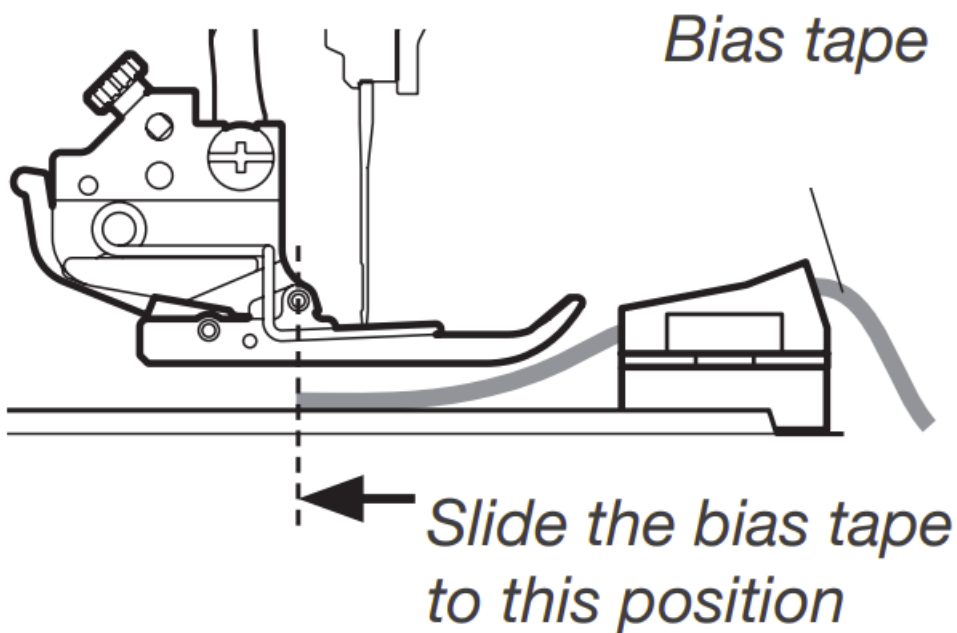


Slide the fabric under the attachment and the bias tape to the rear of the needle drop position.

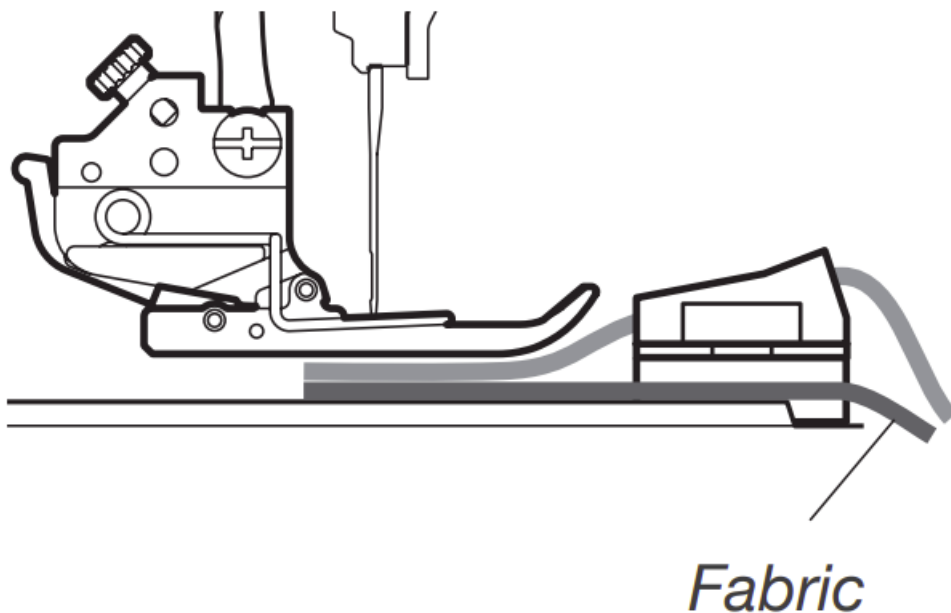

Be sure that the fabric, bias tape and seam lines (left and right) are set at the proper positions. Lower the presser foot and start sewing.

* If the seam line seems out of the alignment, adjust the attachment position by loosening the attachment screws. Tighten the attachment screws securely after adjustment. Always sew test stitches before sewing on the actual fabric.

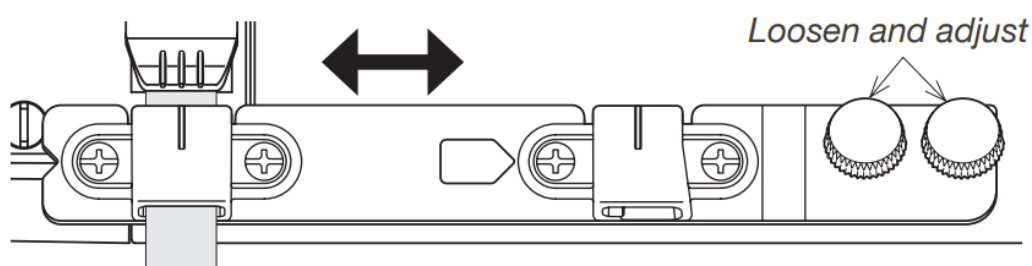


BELT LOOP FOLDER


To sew:

Attach the attachment to the 2 holes on the right front of the machine with the attachment screws.


* Attachment screws (2 pcs.) are included in the standard accessories of your machine.

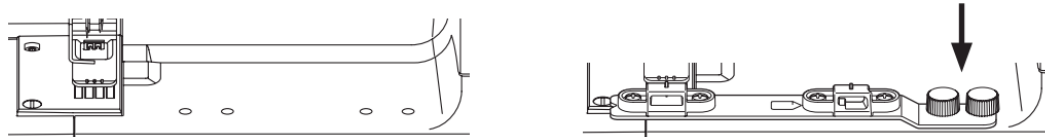


Be sure to set the attachment properly as shown below.

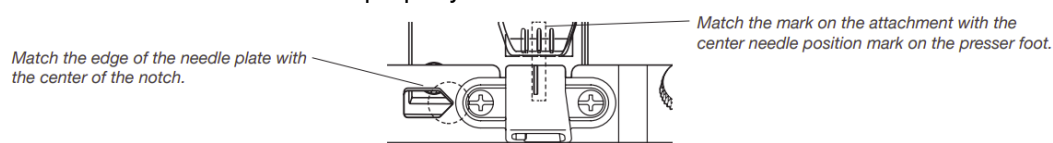

Cut a strip of fabric tape 1" (25 mm) in width. Fold back the edge of the fabric tape to form a 1/4" (6 mm) fold and iron it.

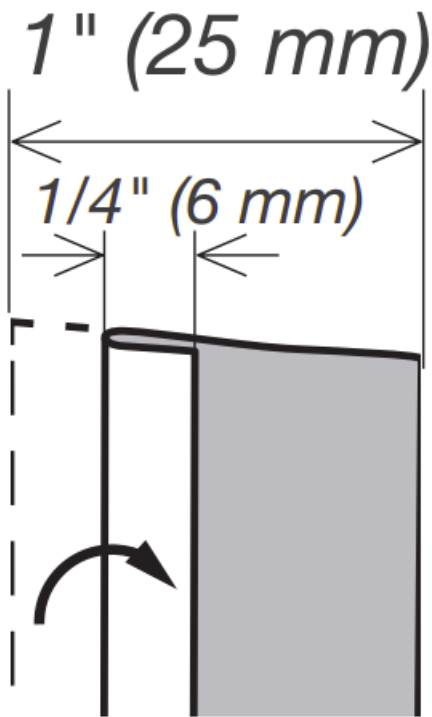


Insert the fabric tape created in step 2. into the belt loop folder with the folded part to the left as shown in the diagram to the right.

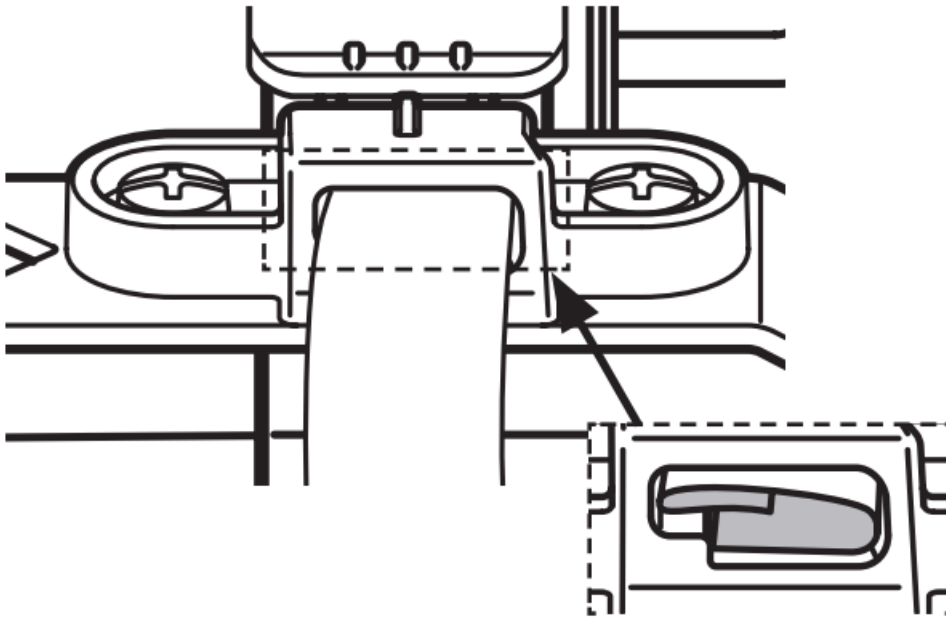

Slide the fabric tape to the rear edge of the presser foot.

* When sewing the fabric tape with top cover stitch, sew while pushing the edge of the fabric tape against the extra piece of fabric so that there is no gap between the fabrics at the beginning of the seam.

Refer to the instruction manual for sewing the beginning of the seam with top cover stitch.

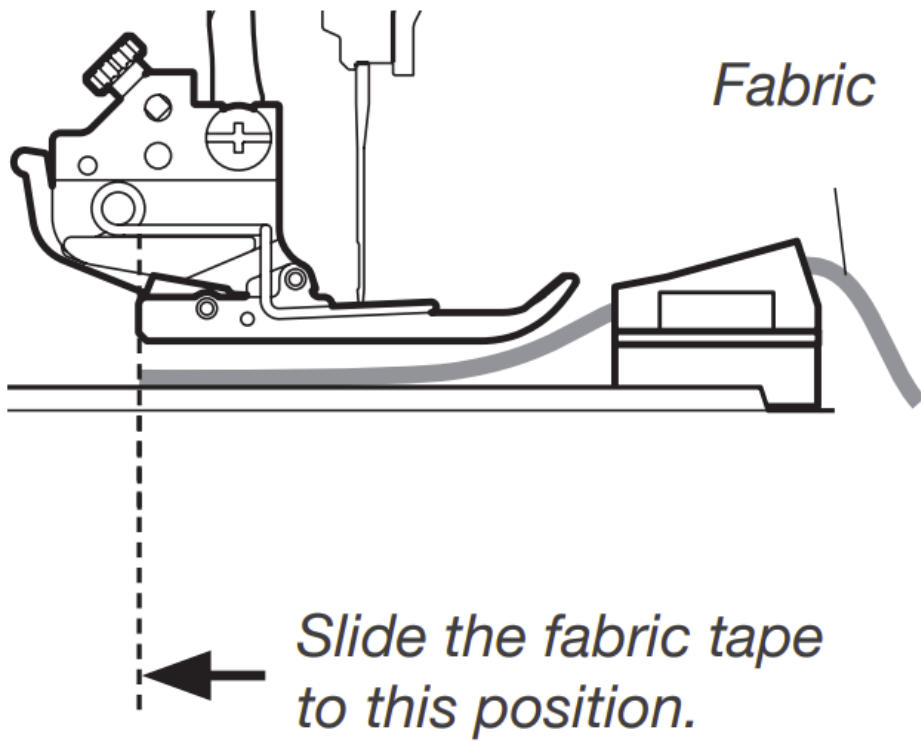


Be sure that the seam lines (left and right) are set at the proper positions for the finished width. Lower the presser foot and start sewing.

* If the seam line seems out of the alignment, adjust the attachment position by loosening the attachment screws.

Tighten the attachment screws securely after adjustment. Always sew test stitches before sewing on the actual fabric.

Loosen and adjust

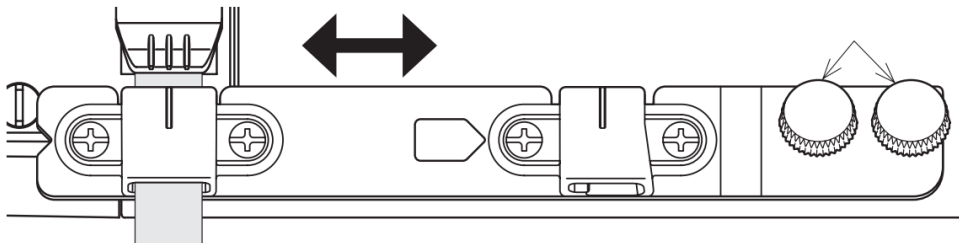

Elna International Corp. SA / 28.01.2022



Documents / Resources

