

## Contents [ [hide](#) ]

- [1 elysia xmax Stereo Masterbus Processor Vintage](#)
- [2 Controls](#)
- [3 Getting started](#)
- [4 Signal Flow](#)
- [5 Connectors](#)
- [6 Recall Sheet](#)
- [7 Warranty Info](#)
- [8 Frequently Asked Questions](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)

# elysia

## elysia xmax Stereo Masterbus Processor Vintage




## Specifications

- Product Name: xmax
- Application: Masterbus processing
- Features: Powerful tool for enhancing mix, full control over dynamics
- Compatibility: Studio, rehearsal space, live stage, on-the-go sessions

## Welcome to the world of masterbus processing!

- The xmax is made for the masterbus. It is a powerful tool to enhance your mix. No matter which stereo bus you want to use xmax on, you always have full control over your dynamics.
- The core of the xmax is its Class-A circuitry with internal Mid/Side processing, delivering pristine audio quality without compromising the natural integrity of your mix. The multiband compression – split into low, mid, and side bands—allows for detailed control of each frequency range, letting you shape your sound with precision.
- We're sure you'll be happy to know the xmax can be your perfect partner in the studio, your rehearsal space, live in stage or for sessions on the go.
- For tips and tricks on how to get the most out of your xmax, you can also visit the elysia YouTube channel.

## Controls

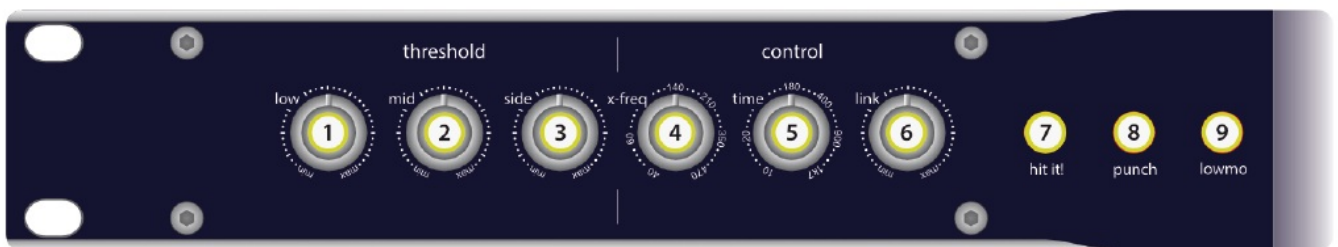

### 1. Low Threshold

The operating point of the low band compressor. If the input level exceeds the value set with this controller, the compression process will start. You can evaluate the gain reduction on the corresponding gr low metering (10).

### 2. Mid Threshold

The operating point of the mid band compressor. If the input level exceeds the value set with this controller, the compression process will start. You can evaluate the gain reduction on the corresponding gr mid metering (10).

### 3. Side Threhold

The operating point of the side band compressor. If the input level exceeds the value set with this controller, the compression process will start. You can evaluate the gain reduction on the corresponding gr side metering (10).

### 4. Crossover Frequency (x-freq) (page 9)

Set the crossover frequency between the low and mid band. The range can be set from 40Hz to 470 Hz.

## 5. Release Control (time)

The return phase of all three compressors. It controls the period of time between the input signal falling below the threshold and the xmax's return to unity gain.

## 6. Link

Links the control voltages of each compressor band . You can go from independent to full link. When in full link, the xmax acts more like a classic stereo VCA compressor.

The band with the most energy takes over the control voltage of the other 2 bands.

You can control who should be the master band with the individual thresholds.

**Example:** In most cases, the low band has the most energy. If you want the mid band to be the master, just turn down the low threshold and increase the mid band threshold until you reach the desired compression.

## 7. Hit it!


Activates the xmax (LED yellow) or deactivates (LED white) it with a hardwire bypass (Metering's remain active). In deactivated state, the input is directly routed to the output by a hardwire bypass.

## 8. Increased Compressor Ratio (punch)

A higher ratio (1:1.45 to 1:2.55) for all compressor bands (LED red: active).

## 9. Low Frequency Mono Maker (lowmo) (page 11)

A high-pass filter affecting only the side band, filtering the low frequencies below 150Hz (LED red: active).

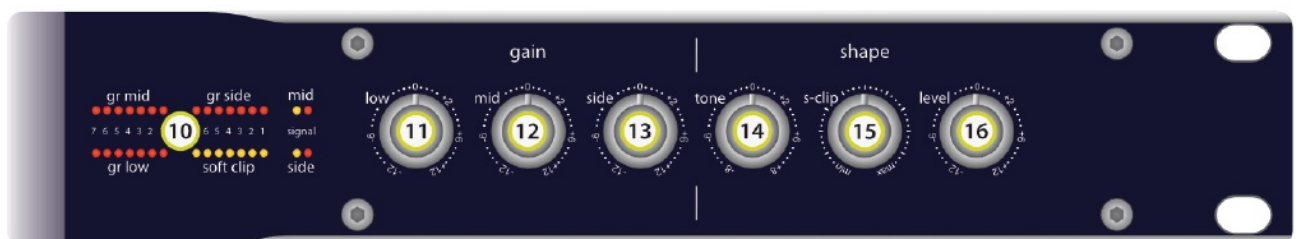

## 10. Metering

The display for the gain reduction of the mid, low and side bands as well as the soft clip limiter peak reduction. Shows the amount of compression and peak reduction measured in dB as an optical support for the acoustic events.

## 11. Low Gain

The make-up gain of the low band of the xmax. This controller compensates for the loss in gain caused by the low band's compression process. It can also be used as a

low shelf EQ.

## 12. **Mid Gain**

The make-up gain of the mid band of the xmax. This controller compensates for the loss in gain caused by the mid band's compression process. It can also be used as an EQ.

## 13. **Side Gain**

The make-up gain of the side band of the xmax. This controller compensates for the loss in gain caused by the side band's compression process. It also can be used as a stereo widener to add more dimension in your mix.

## 14. **High Shelf Equalizer (tone) (page 10)**

A versatile tool for adjusting the high-frequency content of the audio signal, making it brighter or smoother depending on your needs. The controller determines the amount of cut (turn left) or boost (turn right).

## 15. **Soft Clip Limiter (s-clip) (page 12)**

The Soft Clipper was designed to limit short, loud transients to prevent subsequent A/D converters from clipping. However, the circuit does not behave like a classic brick wall limiter, but more like an analog tape machine driven into saturation: it rounds the peaks instead of making hard cuts. You can see the amount of peak reduction at the corresponding s-clip meter.

## 16. **Level**

The master output of the xmax. The control offers up to +/- 12 dB of amplification/reduction to set the output level for the following devices.

# **Getting started**

## 1. **Start with the thresholds**

Adjust the low, mid, and side thresholds to set the desired compression levels. Using the link controller, you can choose whether to apply compression to individual bands (multiband compression) or link them together for a stereo VCA-style compressor behavior.

## 2. **Watch the meters**

In addition to listening, the metering can help guide your decisions regarding the amount of compression applied to each band.

## 3. **Adjust the release and crossover frequency**

Decide on the crossover frequency between the low and mid bands to define the point at which the signal is split. This allows you to control how the low band responds to the lower frequency range, giving you more precise control over the tonal balance and dynamics of the sound in this frequency area.

#### 4. **Set the corresponding makeup gains**

The compression reduces the individual band's level. With the makeup gains you can compensate for the loss of levels. You can also use it as an equalizer for low, mid and side band to add character to your mixes.

#### 5. **Reduce signal peaks**

If you experience frequent signal peaks in your mix, you can limit short, loud transients to prevent subsequent A/D converters from clipping. This allows you to increase the overall loudness of your mix by boosting the makeup gains and/or adjusting the level control.


#### 6. **Add a bit of air**

The high-shelf equalizer is ideal for shaping the overall tonal balance of a mix, giving it more presence or smoothing out excess brightness.

#### 7. **Adjust the output level**

Watch your AD converter's input and adjust the level controller to get an appropriate input level to your DAW or other devices on your masterbus.

### Signal Flow

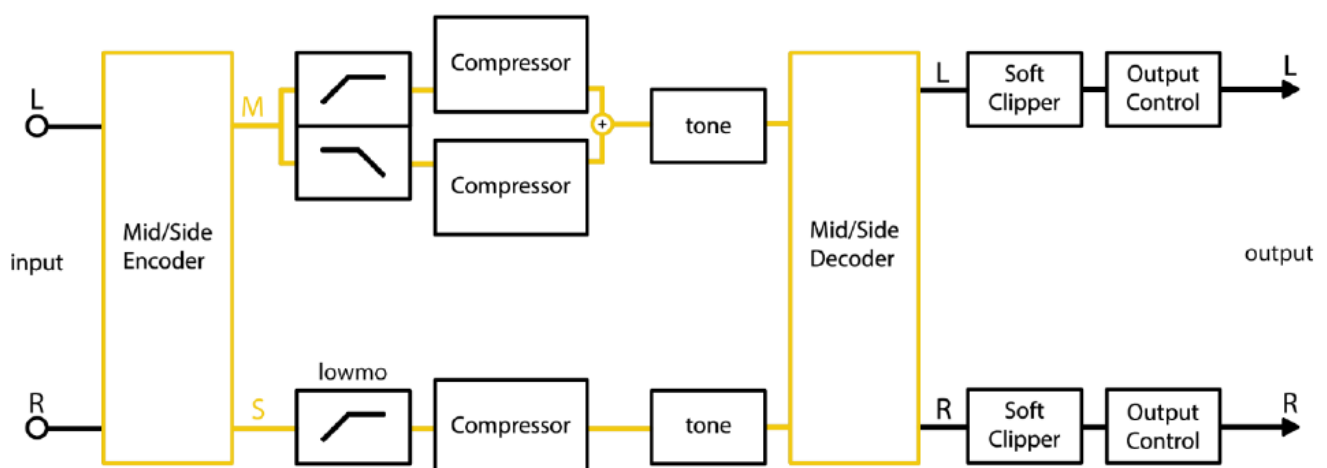


- The xmax processes audio using Mid/Side (M/S) encoding, allowing precise control over dynamics, tone, and stereo imaging.
- A stereo input (Left/Right) is converted into Mid (M) and Side (S) signals. The Mid signal represents the sum of both channels, containing center-panned elements, while

the Side signal captures the difference, determining stereo width.

- The Mid and Side signals are processed separately. The Mid signal passes through a low-frequency filter to control the low band and a high-frequency filter to control the mid band. The Side signal includes a low-frequency control filter (“lowmo”) to reduce unwanted stereo width in the bass range. Independent compressors shape the dynamics of all three signals without affecting the overall stereo balance. The tone control enhances character and clarity.
- After processing, the signals are decoded into a stereo signal . The final output stage includes a soft clipper to prevent peaks and ensure smooth limiting, followed by an output control for final level adjustment.
- This unique processing chain ensures balanced dynamics, refined tone, and controlled stereo imaging for a finalized masterbus sound.

## Compression (Punch)

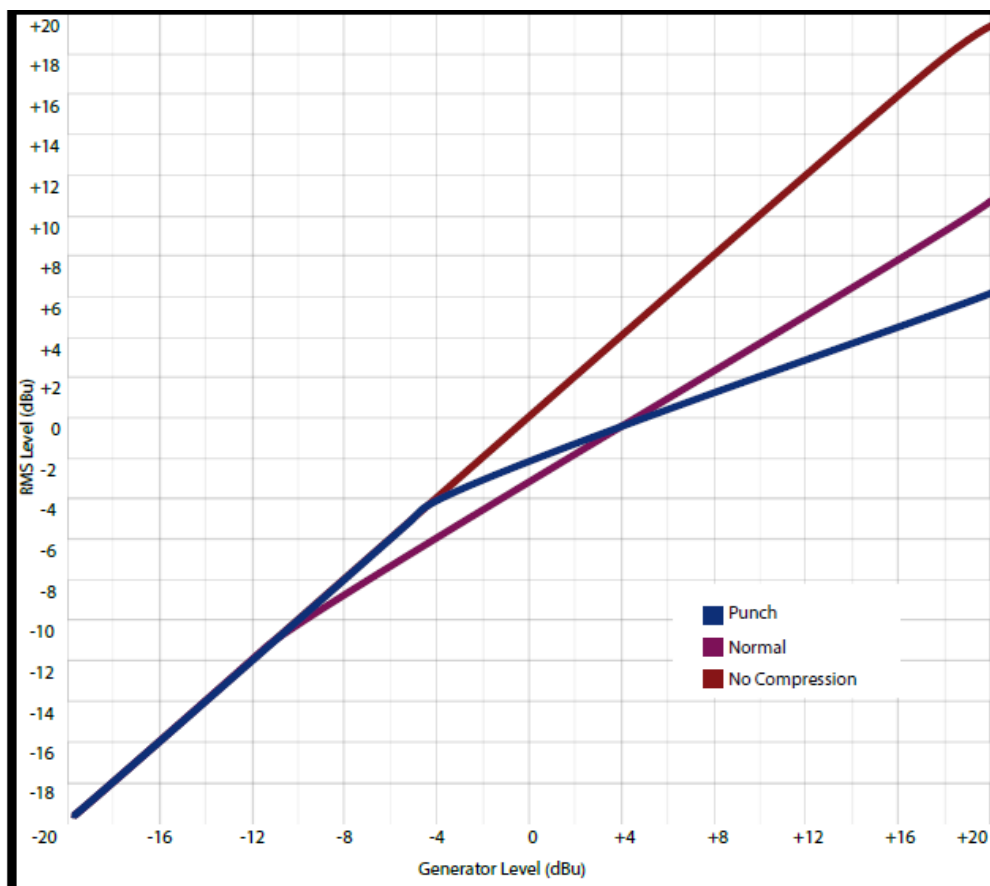


- The xmax features a flexible and musical multiband compression designed to deliver both smooth dynamic control and punchy impact where needed. With two distinct compression curves for all three compressors (low, mid and side), it adapts effortlessly to a wide range of material. The default ratio of 1:1.45 provides gentle,

transparent compression—ideal for full mixes without introducing obvious pumping or squashing. For more pronounced control, the punch mode engages a 1:2.55 ratio, bringing greater intensity and energy, perfect for drums, bass or anything that needs to hit a little harder.

- All bands have a fixed attack time of 10 milliseconds, carefully chosen to preserve the natural transients of your signal while still offering effective compression across the frequency bands. However, when the gain reduction reaches 8 dB or more Auto Fast automatically shortens the attack time for fast and loud transients, preventing distortion and preserving clarity in even the most dynamic material.
- It then returns to its original 10ms setting. Auto Fast allows the compressors to be fast when needed.

### Crossover Frequency (x-freq)

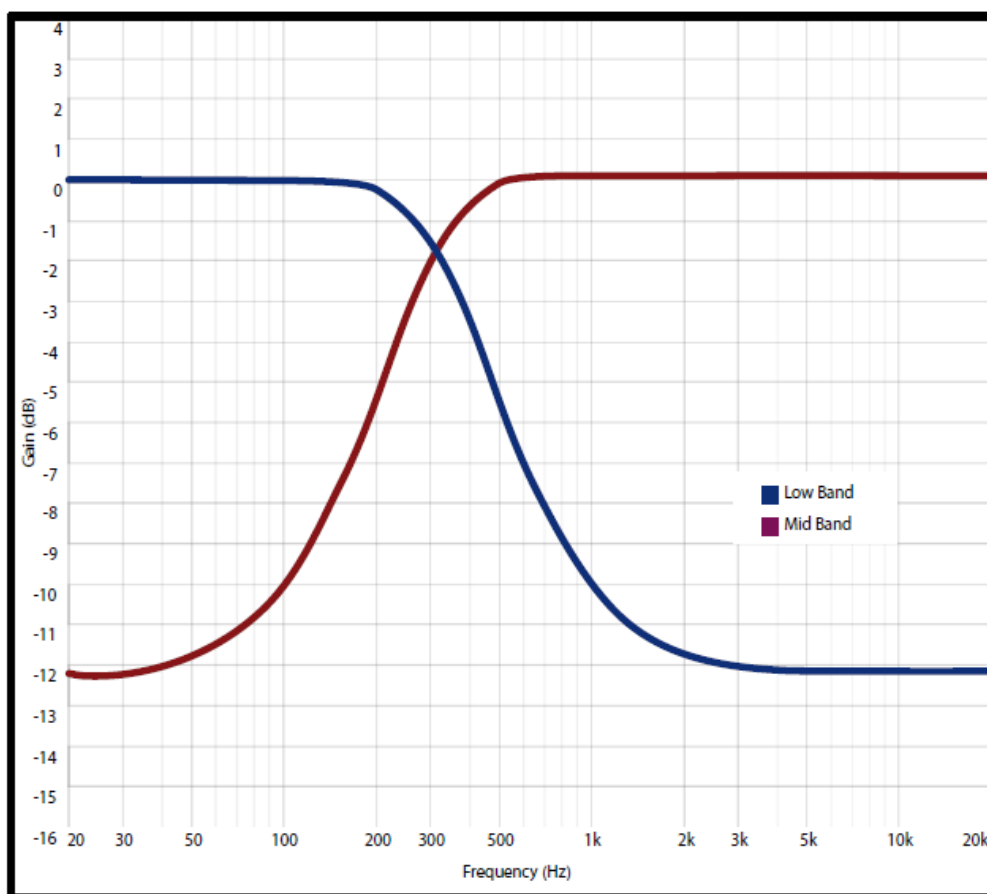


- Set the crossover frequency between the low and mid bands of the xmax. This control defines how the frequency spectrum is split, determining which content is processed by the low band and which is passed to the mid band.
- Operating in a range from 40 Hz to 470 Hz, it allows you to fine-tune the boundary between low-end and midrange processing. The diagram shows the crossover point

with completely cut bands.

**Example:** A lower crossover point focuses the low band on compressing more into the sub and bass region, while a higher setting shifts more of the low-mid content into the low band, affecting how the dynamics of kick drums, basslines, synths and other low-frequency elements are shaped.


## Tone

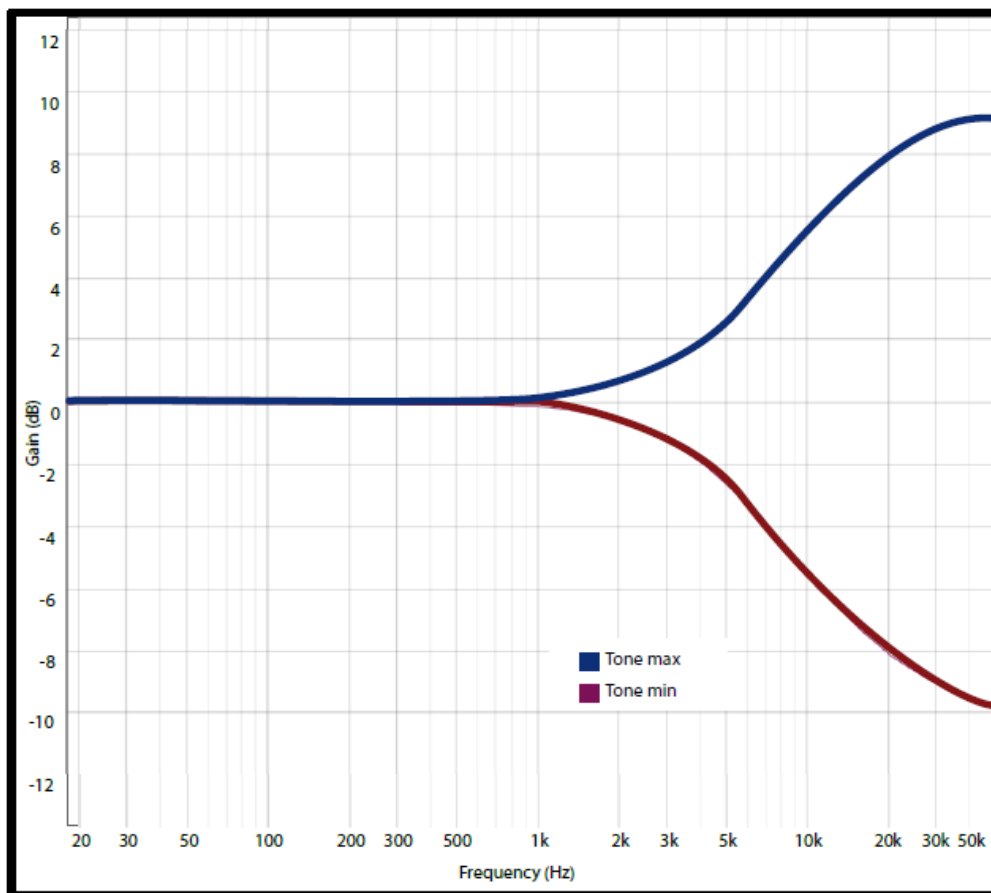

- Tone is a high-shelf filter that allows you to boost or cut high frequencies across the full-range signal path of the xmax. Designed for smooth, musical shaping, it provides intuitive control over the brightness or softness of your overall sound and adds a little bit of air to your mix.
- The Tone knob ranges from -8 dB (cut) to +8 dB (boost), with a shelving frequency optimized for natural-sounding adjustments. The filter is subtle yet effective, making it useful both for mixing and mastering.
- **Example:** If you want to enhance presence and articulation in vocals, synths, guitars or full mixes, or tame aggressive transients or harsh top-end content you can quickly adjust the tonal balance without reaching for an external EQ.




## Lowmo

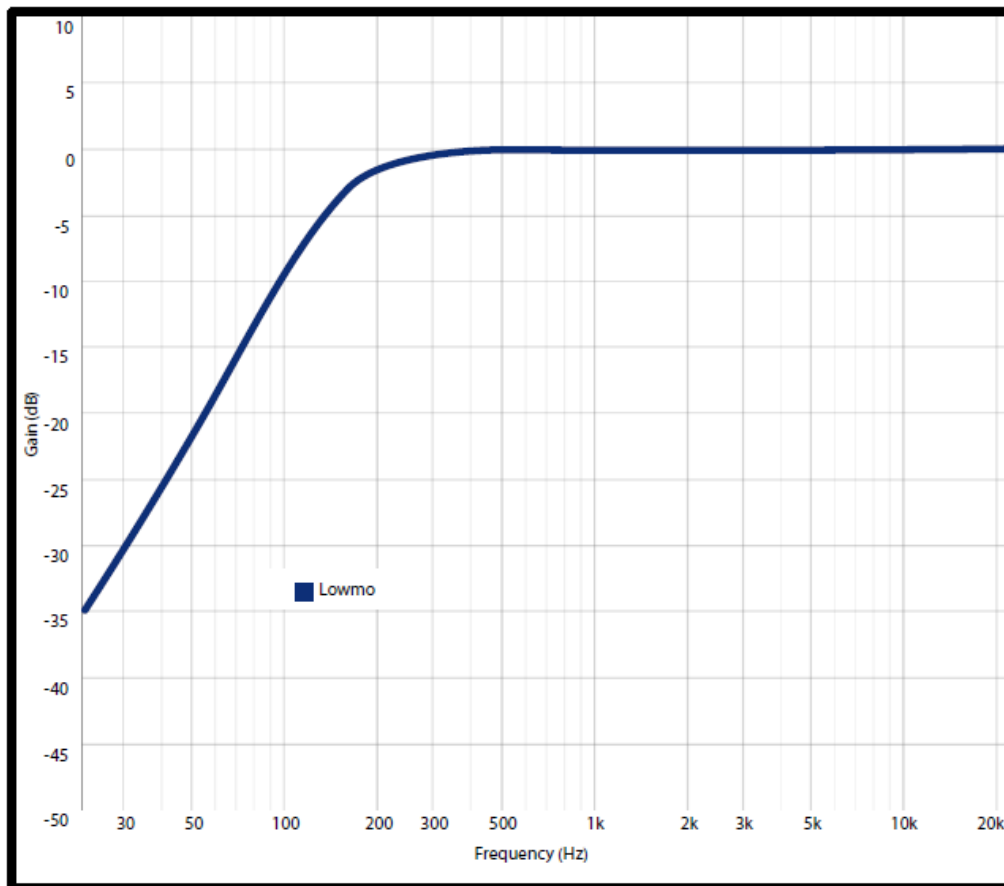

- The lowmo feature engages a high-pass filter (12dB/octave) that is applied exclusively to the side (S) band. This filtering occurs before the signal enters the compression stage, ensuring greater precision and control in the stereo image without affecting the mono (low & mid) bands.
- Typical use cases include enhancing mono compatibility by reducing un-necessary low-frequency energy in the sides, improving mix clarity and spatial definition or tightening up bass response while maintaining a wide, open top-end image.
- The lowmo feature may be toggled on or off, depending on whether high-pass filtering of the side band is desired.

**Example:** Use lowmo when working with complex low-end material like bass-heavy synths, kicks, or live recordings where stereo bass content can introduce phase issues.

## Soft Clip Limiter

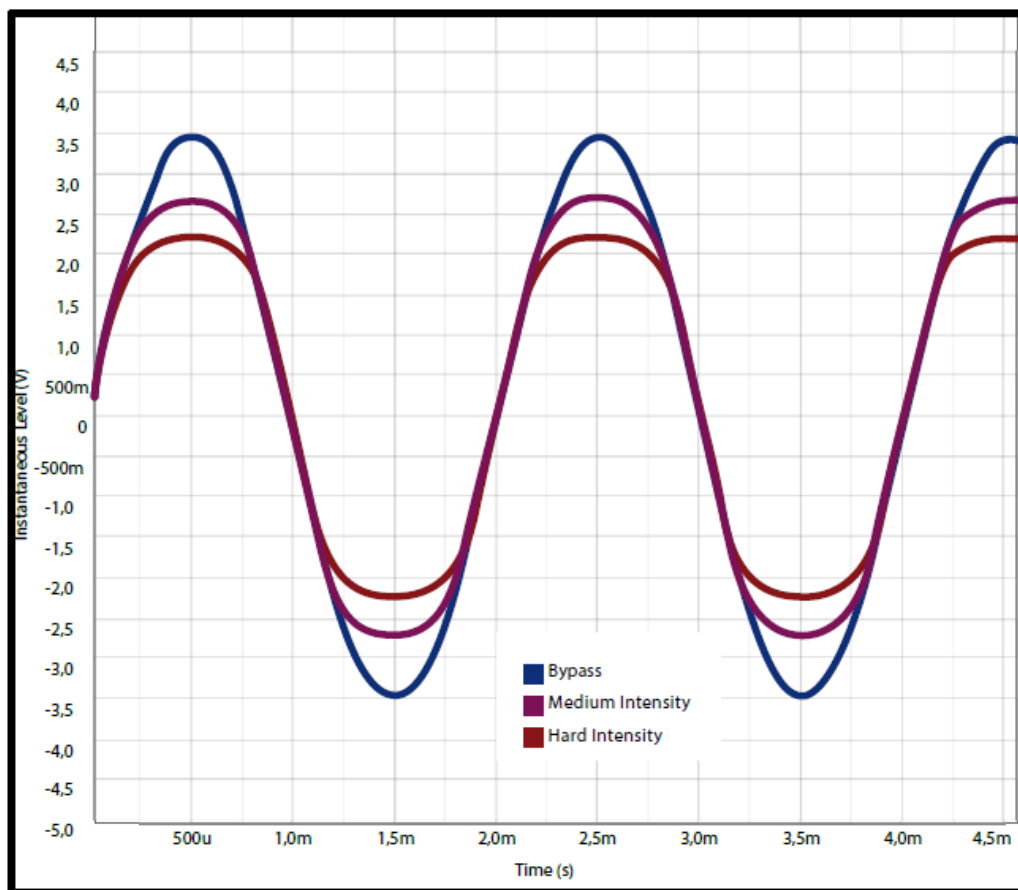

- If the xmax is the last unit in the signal path before the A/D converter, it is only once that the setting of the Soft Clip limiter has to be adapted to the converter. It is best to use a fast, sample-accurate PPM meter to find the right setting, because it is an accurate method of benchmarking the resulting change in level.
- The soft clip metering can be used to see the amount of limiting. Be careful with the amount of limiting, as noticeable distortion appears if you drive this circuit too hard. Particularly with regard to acoustic and classical music, this feature should be used with care and moderate settings only.

## Connectors



1. Audio inputs (XLR and 1/4" TRS)
2. Audio outputs (XLR and 1/4" TRS)
3. Additional audio outputs (1/4" TRS)
4. Mains connector/power switch/fuse holder
5. Voltage selector

- **Made for Stereo operation only:** Connect both inputs to either the XLR or the TRS inputs labeled IN L & IN R. The TRS inputs will be preferred by the unit, if you connect to both stereo inputs (TRS and XLR) at the same time.
- **Stereo Outputs:** Connect your interface or following devices to OUT L & OUT R. You can use all of the two stereo outputs (TRS and XLR) at the same time.

### Inputs (+4dBu)

- **XLR balanced:** Pin 1: ground Pin 2: hot (+) Pin 3: cold (-)
- **XLR unbalanced:** Pin 1: ground Pin 2: hot (+) Pin 3: ground
- **TRS balanced:** Sleeve: ground Tip: hot (+) Ring: cold (-)
- **TRS unbalanced:** Sleeve: ground Tip: hot (+) Ring: ground

### Outputs (+4dBu)

- **XLR balanced:** Pin 1: ground Pin 2: hot (+) Pin 3: ground
- **XLR unbalanced:** Pin 1: ground Pin 2: hot (+) Pin 3: idle
- **TRS balanced:** Sleeve: ground Tip: hot (+) Ring: ground
- **TRS unbalanced:** Sleeve: ground Tip: hot (+) Ring: idle

### Fuses (2 pieces)

- **230V operation:** 200mA slobber
- **115V operation:** 200mA slobber

### Precautions

#### **WARNING: High Voltage**

- The xpectorcube must be connected to ground.
- Do not use a damaged power cord.
- Never place containers with liquid on the rack.
- Do not expose this device to rain or moisture.
- Do not use this device near water.

- Refer service to qualified service staff only.

## CAUTION: Temperature

- Surfaces of the device may become hot during operation.
- Do not install this device near any heat source such as radiators, stoves or other heat sources.

## CAUTION: Connecting & Mounting


- Never connect to the output of a power amplifier.
- Do not connect mono jacks for all of the headphone outputs
- Do not apply extensive force when installing this device.
- Use the device according to this manual only.

## CAUTION: Humidity

If this device is moved from a cold place to a warm room, condensation can occur inside the device. To avoid damaging the unit please allow it to reach room temperature before switching it on.

## Recall Sheet

### Version:

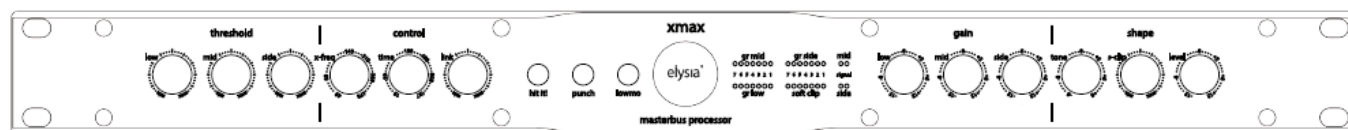

### Notes:

### Version:



### Notes:

- Project/Song:

- Engineer:
- Date:

You can also download the recall sheet at: [www.elysia.com/downloads](http://www.elysia.com/downloads)

## Technical Details

- **Frequency response:** < 10Hz – 180kHz (-3dB)
- **THD+N @ 0 dBu, 20 Hz – 22 kHz:** 0,01%
- **Noise floor, 20 Hz – 20 kHz (A-weighted):** -91,3dBu
- **Dynamic range, 20 Hz – 22 kHz:** 112 dB
- **Maximum input level:** +21dBu
- **Maximum output level:** +22dBu
- **Input impedance:** 20 kOhm
- **Output impedance:** 68Ohm
- **Weight:** 3,17lbs/1,46 kg
- **Power consumption:** 9 Watts

## CE Conformity

elysia GmbH, Am Panneschopp 18, 41334 Nettetal,

Germany, declares with sole responsibility that this product complies with the following norms and directives:

- 2006/95/EG Low Voltage Directive (formerly 73/23/EWG or 93/68/EWG)
- 89/336/EWG EMC (Electromagnetic Compatibility) Directive
- DIN EN 55103-1 EMC of audio equipment – Emission
- DIN EN 55103-2 EMC of audio equipment – Immunity

This declaration becomes invalid by any unapproved modification of the device.

Nettetal, 01.04.2025 – Ruben Tilgner

## Warranty Info

- The xmax is covered by a limited warranty for a period of 2 years against defects in

parts and labor from the date of purchase. Natural wear is not covered by this warranty. Repairs or replacements will not extend the warranty period.

- The warranty is given to the original purchaser only and is not transfer-able. elysia will only give warranty on products purchased through authorized elysia dealers. The warranty will only be valid in the country of the original purchase unless otherwise pre-authorized by elysia.
- All warranties become void when the product has been damaged by misuse, accident, neglect, modification, tampering or unauthorized alteration by anyone other than elysia authorized service personnel.
- The warrantor assumes no liability for property damage or any other incidental or consequential damage whatsoever which may result from failure of this product. Any and all warranties of merchantability and fitness implied by law are limited to the duration of the expressed warranty.  
elysia will not pay for express or overnight freight service or pay for shipments to locations outside Germany. All damages caused by transport are not covered by this warranty.
- This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Some of the above limitations may not apply to you.

## **Legal Info**

- The information in this document is subject to change without further notice and shall not be deemed as an obligation or warranty of any kind by the manufacturer. No warranties, express or implied, are made with regard to the quality, suitability or accuracy of this document.
- The manufacturer reserves the right to change the contents of this document and/or the associated products at any time without the provision of prior notice. The manufacturer shall not be held liable for damages of any kind arising from the use, or the inability to use this product or its documentation.
- The information in this document is subject to copyright. All rights, technical changes and errata are reserved. No part of this manual may be reproduced or transmitted in any form or for any purpose without the e-plicitly written permission of the copyright holders.
- elysia and xmax are registered trademarks of elysia GmbH. Other product and brand

names contained in this document are used for identification purposes only. All registered trademarks, product designations or brand names used in this document are the property of their respective owners.



■ This product is manufactured according to the 2002/95/EC directive. The purpose of this directive of the European Union is the Restriction of Hazardous This product is manufactured according to the 2002/95/EC directive. The purpose of this directive of the European Union is the Restriction of Hazardous


- elysia GmbH
- Am Panneschopp 18 41334
- Netteltal Germany
- [info@elysia.com](mailto:info@elysia.com)

## Frequently Asked Questions

**Q: Where can I find more tips and tricks for using xmax effectively?**

A: You can visit the elysia YouTube channel for additional tipson maximizing your xmax usage.

## Documents / Resources

	<a href="#">elysia xmax Stereo Masterbus Processor Vintage [pdf]</a> Instruction Manual xmax Stereo Masterbus Processor Vintage, xmax, Stereo Masterbus Processor Vintage, Masterbus Processor Vintage, Processor Vintage, Vintag e
---	---

## References

- [User Manual](#)

---

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.