



[Home](#) » [Emaux](#) » **Emaux CS-A20 CyberSync Chemical Controller Instruction Manual** 

Contents [[hide](#)]

- 1 Emaux CS-A20 CyberSync Chemical Controller
- 2 Product Information
- 3 Product Usage Instructions
- 4 SAFETY WARNINGS
- 5 SAFE POOL SANITIZING WORKING PRINCIPLE
- 6 INTRODUCTION
- 7 PRODUCT FEATURE
- 8 Product dimension
- 9 Product Specification
- 10 INSTALLATION
- 11 CONTROL AND SETUP
- 12 IOT, SMART LIFE PLATFORM
- 13 CLEANING THE TITANIUM CELL
- 14 TERMS OF THE WARRANTY
- 15 CONTACT
- 16 FAQ
- 17 Documents / Resources
 - 17.1 References



Emaux CS-A20 CyberSync Chemical Controller



Product Information

- This appliance must be installed in accordance with national wiring codes and with a means of disconnection incorporated in any fixed wiring.
- High voltage can shock, burn, or cause death or serious property damage.
- Chlorine is a highly effective sanitizing agent commonly used in swimming pools.
- The chlorinator uses electrolysis to break down salt in the water to produce chlorine gas.
- Chlorine production can be regulated from the control unit by altering the electric current flowing through the titanium electrode.
- The EMAUX Chlorinator does not maintain water chemistry but produces chlorine from a mild salt solution.
- Regular water testing is recommended to ensure proper chemical balance.

Product Usage Instructions

- Follow national wiring codes for installation.
- Ensure a means of disconnection is incorporated into fixed wiring.
- Do not exceed an 8-amp current loading for connected pumps.
- Access preset functions and control the device through the app interface.
- Refer to the manual for detailed instructions on cleaning the titanium cell to maintain optimal performance.

SAFETY WARNINGS

This appliance must be installed by national wiring codes and with a means of disconnection incorporated in any fixed wiring. High voltage can shock, burn, or cause death or serious property damage.



1. In order to reduce the risk of electric shock, DO NOT use an extension cord to connect the unit to the electric supply.
2. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent, or a qualified electrician.
3. The system must be permanently connected to an individual circuit breaker, especially when pump power is connected from the pump socket of the device.
4. This electricity supply must be connected through a residual current device (RCD) or Ground Fault Circuit Interrupter (GFCI) with a rated residual operating current not exceeding 30 mA.
5. Electrical grounding must be connected before connecting to electrical power. Failure to ground all electrical equipment can cause an electric shock or serious or fatal injury.
6. Before servicing, unplug the power plug from the electrical socket and allow the device to cool for at least 15 minutes.
7. Never unplug the cell cable during operation.

WARNING

This appliance can be used by children aged 8 years and above and persons with reduced physical, sensory, or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

HYPERTHERMIA

- Always unplug the device from its socket or power source and allow it to cool before opening the enclosure. There is high risk of shock and burn injuries from touching the internal component.



OMPRESS AIR HAZARDOUS

- This system enclosed titanium cell in a plastic enclosure that can become pressurized. Pressurized air can cause the plastic enclosure to explore causing serious injury or death. The cell must be operated with the pump running and the valves fully open allowing water to flow unrestricted through the cell enclosure.



WARNING

- This device is intended for use with swimming pools and spas only; it must not be used for disinfecting drinking water.
- Only one pump and one underwater light may be connected to this unit The current loading of the pumped connected must not exceed 8 Amp.

SAFETY WARNINGS


	Correct disposal of this product
--	----------------------------------



This symbol on the product, or in its packaging, indicates that this product may not be treated as household waste. Instead, it should be taken to the appropriate waste collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by the inappropriate waste handling of this product. For more detailed information about the recycling of this product, please contact your local council, your household waste disposal service, or the shop where you purchased the product.

SAFE POOL SANITIZING WORKING PRINCIPLE

Chlorine is a highly effective sanitizing agent that is commonly used in swimming pools. It can prevent the growth of bacteria and fungi. This chlorinator uses the process of electrolysis to break down the salt (NaCl) in the swimming pool water to produce chlorine gas (Cl₂). Chlorine production can be regulated from the control unit by altering the electric current flowing through the titanium electrode in the cell housing.

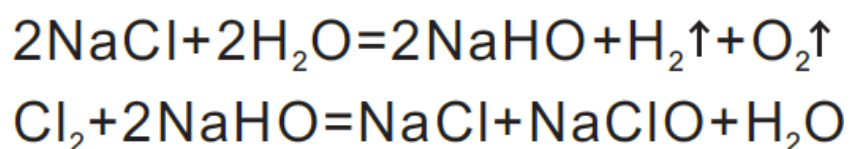

WATER CHEMISTRY

WARNING: It is important to note that the EMAUX Chlorinator does not maintain the water chemistry of your swimming pool water; it simply produces chlorine from a mild salt solution.

To ensure that your chemical balances is within the guidelines listed below and to encourage a sparkling clean, you should also have your water tested regularly at your local pool shop.

Salt level	3000 – 4000 ppm
	3000 – 4000 ppm
	4000 – 5000 ppm
Free Chlorine	1.0 – 3.0 ppm
pH	7.2 – 7.6
Cyanuric acid (stabilizer)	30 – 50 ppm
Total Alkalinity	80 – 120 ppm
Calcium Hardness	200 – 400 ppm
Metals	0ppm

CHLORINE LEVEL CALCULATION

- It is important to note that the EMAUX Chlorinator does not maintain the water chemistry of your swimming pool water; it simply produces chlorine from a mild salt solution.

$$\text{Required Chlorine Production Rate (g/hr)} = \frac{\text{Pool Volume (litre)} \times \text{Standard Chlorine (g/litre)}}{\text{Turnover Rate (Hr)}}$$

Standard chlorine level not less than 2mg/liter = 0.002g/liter

Example:

Pool volume: 65m³ = 65,000 litre

Turnover rate: 4 Hour

$$\text{Required chlorine production rate(g/hr)} = \frac{65.000\text{liter} \times 0.002\text{g/liter}}{4 \text{ Hr}} = 32.5\text{g/hr}$$

SALT LEVEL

- The amount of salt required is between 4000 and 6000 ppm. This can be done by adding 4- 6 kg of salt per 1,000 litres of water directly into the pool water.
- A low concentration of salt (below 2500 ppm) will cause premature cell failure.
- A High concentration of salt (above 6000 ppm) may cause electro-oxidation and

corrosion damage to the Stainless Steel pool fixtures and fittings.

Salt is required according to the volume of the pool

Pool volume (m3)	Salt (kg)	Pool volume (Gallons)	Salt (Pound)
10	40	2,642	88
15	60	3,963	132
20	80	5,283	176
25	100	6,604	220
30	120	7,925	264
35	140	9,246	308
40	160	10,567	352
50	200	13,209	440
60	240	15,850	528
70	280	18,492	616
80	320	21,134	704
90	360	23,775	792
100	400	26,417	880
110	440	29,059	968
120	480	31,700	1,056
150	600	39,626	1,320

Note: Table based on 4000 ppm of salt per m3 of water.

TYPE OF SALT

WARNING: The most common salt used in swimming pools with Salt Electrolysis is 99% pure Sodium Chlorine (NaCl).

DO NOT use the following types of salts:

1. Rock salt.
2. Salt with more than 1% yellow prussiate of soda.
3. Salt with more than 1% of anti-caking additives.
4. Iodized salt.

Salt with additives or impurities will cause premature cell failure.

2.5 ADDING AND REMOVING SALT FROM THE SWIMMING POOL WATER

Before adding the salt into the pool, place the multiport valve on “Filtration” or “Recirculation” and then turn the filtration pump on.

Add the salt directly into the pool evenly around the pool or ballast tank. Do not allow the salt to sit in a pile on the bottom of the pool. Do not add a large amount of salt near the skimmer at the same time. It will damage the unit. Keep the filtration system running for 24 hours using the Main Drain or vacuum suction nozzle as a main suction line. The only way to remove the salt from the pool water is to partially drain the pool and refill it with fresh water.

INTRODUCTION

- The Emaux CyberSync Chemical Controller is an innovative saline electrolysis system designed to enhance swimming pool water quality and transform your pool into a smart pool. This advanced product generates chlorine from both regular and seawater through electrolysis, providing a more environmentally friendly alternative to traditional chlorine chemicals.
- The CyberSync continuously monitors the pool water status, optimizing chemical dosing and minimizing chemical usage, which helps reduce skin irritation and discomfort for swimmers. As the best choice for upgrading your pool to smart technology, the CyberSync ensures your pool remains clean and well-maintained. As a smart control station, the CyberSync allows you to connect your pump, lights, disinfection system, and heater. With its smartphone or tablet app, you

can monitor and control your pool status anytime, anywhere.


PRODUCT FEATURE

Introducing our advanced IoT-enabled pool monitoring system, designed to enhance your pool maintenance experience. This innovative system connects seamlessly to the Smart Life app, allowing you to monitor critical parameters such as pH, temperature, ORP (Oxidation-Reduction Potential), and salinity in real time. With the ability to respond intelligently to these sensor readings, the system can automatically control your pool pump, ensuring optimal water quality and safety.

Additionally, the Smart Life app features robust scheduling and automation functions, enabling you to manage your pool effortlessly from anywhere. Experience a smarter, more efficient way to keep your pool in perfect condition, all through the convenience of the Smart Life app.

1. Real-Time Alerts: Get instant notifications for pH, temperature, ORP, and salinity to maintain optimal water quality.
2. Pump Operation Status: Receive instant notifications when the pool pump starts or stops for real-time updates.
3. Connection Status Alerts: Get notified if the app loses connectivity to IoT devices or the internet.
4. Remote Control: Manage your pool's settings and check system status from anywhere, even remotely.
5. Automated Scheduling: Schedule maintenance tasks and automate chemical dosing for effortless pool upkeep.
6. Seamless Integration: The app easily connects with various Smart Life IoT devices for effortless pool management.
 1. Automation pool chemistry control
 2. Automatic pool device control: UV-C, heater,
 3. Simple to upgrade the pool to automation
 4. Monitor the Pool status
 5. IOT connection
 6. AI chemical control (simple setup and minimize chemical usage)

Product dimension

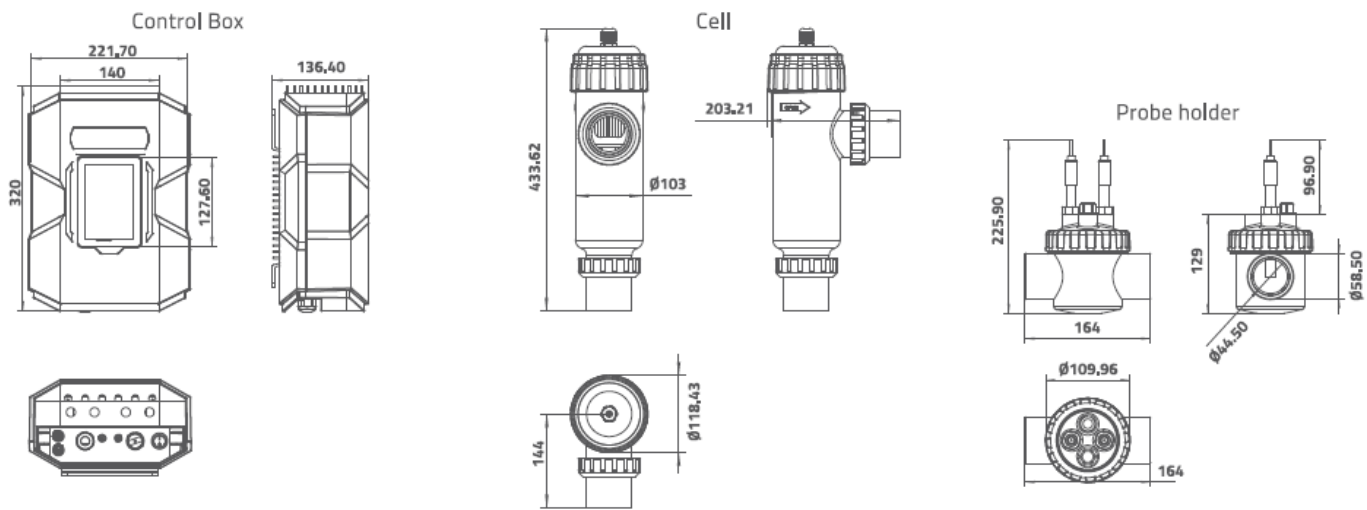

Product Specification

CyberSync Pool Station		Input Voltage/ Frequency (US Version)	Input Voltage/ Frequency (EU Version)	Salt Level	Cell Output (gram/h)	Concrete Pool (m³)	IP Rating	Function
Code	Model							
9130601	CS-A20	110-120V 50 Hz/60 Hz	220-240V 50 Hz/60 Hz	3000-5000 ppm	20	60	IPX4	Chlorinator
9130602	CS-A30	110-120V 50 Hz/60 Hz	220-240V 50 Hz/60 Hz	3000-5000 ppm	30	80	IPX4	Measurement
9130603	CS-A40	110-120V 50 Hz/60 Hz	220-240V 50 Hz/60 Hz	3000-5000 ppm	40	100	IPX4	Device connection

CyberSync Salt Chlorinator		Input Voltage/ Frequency (US Version)	Input Voltage/ Frequency (EU Version)	Salt Level	Cell Output (gram/h)	Concrete Pool (m³)	IP Rating	Function
Code	Model							
9130052	CS-20	110-120V 50 Hz/60 Hz	220-240V 50 Hz/60 Hz	3000-5000 ppm	20	60	IPX4	Salt chlorinator
9130053	CS-30	110-120V 50 Hz/60 Hz	220-240V 50 Hz/60 Hz	3000-5000 ppm	30	80	IPX4	
9130054	CS-40	110-120V 50 Hz/60 Hz	220-240V 50 Hz/60 Hz	3000-5000 ppm	40	100	IPX4	

FUNCTION	SPECIFICATION
Display	4.3" LCD with Touch control
Cell type (chlorine production)	20 g/h, 30 g/h or 40 g/h
Measurement	pH, ORP, Salinity, and Temperature
Device connection	Dosing pump: x 3 (hot contact) @50W Switch: x 3 (cold contact)
Pool cover detect	Detect connection x 1

Wi-Fi	– 802.11 b/g/n – 2.4 GHz
Modbus	RS485
Input	220V to 240V AC, 2A max (EU version) 1 10V to 120V AC, 4A max (US version)

Probe and Accessories Specifications


Code	Product Name	Parameter
106090073	ORP probe	Pressure: 7 bar Material: epoxy Measuring range: -300 to 900 mV (with 3 m signal line)
106090073	pH probe	Pressure: 7 bar Material: epoxy Measuring range: pH 0-14 (with 3 m signal line)
178818	Salinity probe	Pressure: 7 bar Material: epoxy Measuring range: 1000 to 35000 ppm (with 3 m signal line)
178817	Temperature sensor	stainless steel with 3 m cable
1090010392	ORP buffer solution	256 mV, 30 mL
109007168	pH buffer solution, pH 4 and pH 7	pH 4.0 and pH 7.0, 30 mL

E130078	Probe holder	PVC transparent
114145332	Flow switch	Normal open
620065469	Holder	PVC

INSTALLATION

Open the cover

- Insert the tools (screw driver) near the buckle position
- Pick up the cover and then push it open

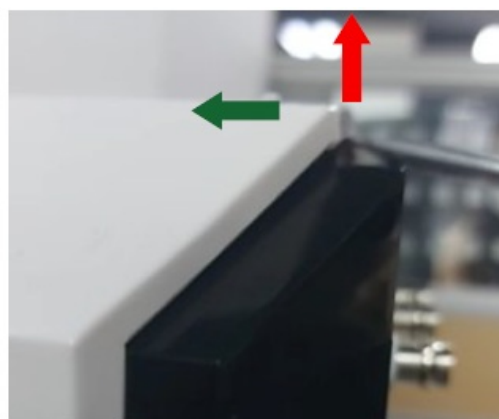

Connections

- Emaux Chemical controller can connect with 3 dosing pumps, 1 circulation pump, and 4 devices.




Hot contact vs Cold contact

- Hot contact (Dosing pump): The contact has electricity, which same as the input power of this chemical controller. You can directly connect the dosing pump L/N to the connector for use



Connection: Device power > 0.2A (230V, 50W, 120V 25W)

- Cold contact (Device relay): The contact is a switch only. Max 2A, 240V. A relay switch is highly recommended for the user to connect to an external device:

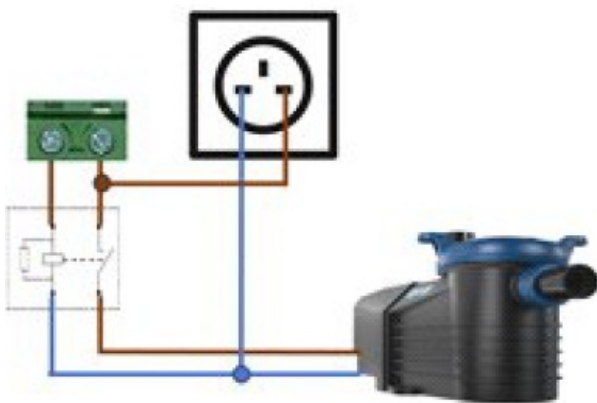

Connection: Device power < 2A
(230V, 500W, 120V 250W)



Connection: Device power < 2A
(230V, 500W, 120V 250W)

Installation Diagram

1. Clock: Clock syncs with connected mobile when the internet is connected
2. Show Flow switch, pool cover, and low temperature status
3. Electrolysis: show the production of Chlorine
4. pH: pool has to be controlled in the range 7.2 to 7.6
5. ORP: range should be in 650mV to 750mV, reference indication of Chlorine in range 1.0 to 3.0 ppm. temperature-related.
6. Salinity: for salt pool (user with chlorinator), recommended using in the range 3000 to 5000 ppm.
7. Temperature: 26C to 28C, racing pool 25C to 27C.



General device condition

Dosing pump relay status:

- On/ Auto 
- Schedule 
- Stop 
- Error 
- disactivate 


Setup

- Press Menu switch to the setup menu

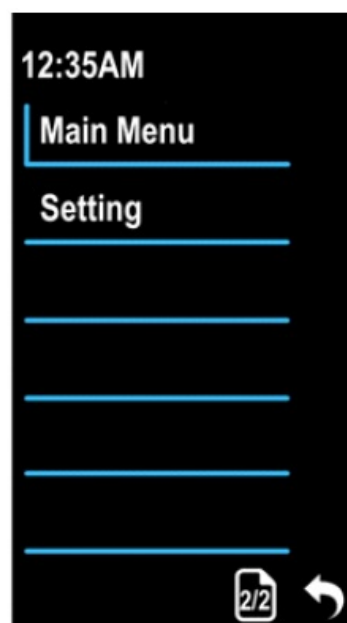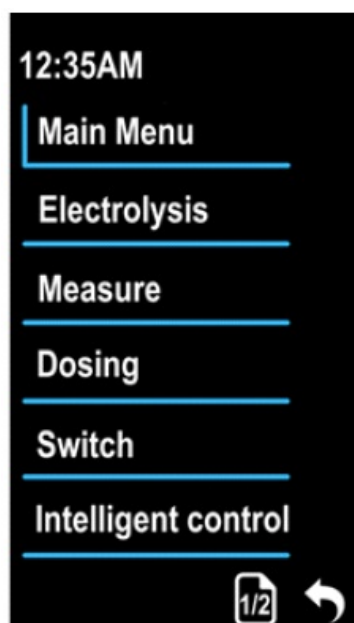

Electrolysis


1. Select cell: 20g, 30g, 40g
2. Level: You can use this option to change the duty cycle to reduce the chlorine production
3. Winter mode: When winter mode is activated, Chlorine production is reduced to 85%
4. Mode: you can switch off the cell function
5. Schedule: 4 scheduled times for the user to provide the chlorine production.

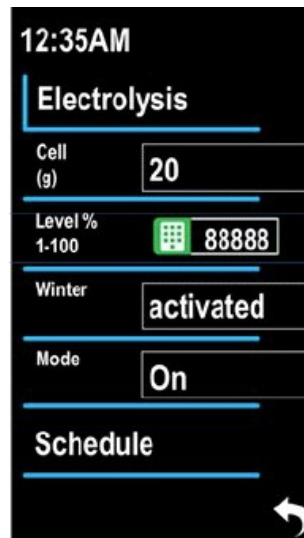

Measurement

User from probe: pH, ORP, Salinity and Temperature setup and calibration.

1. Function: You can turn on/ off
2. Offset: fine-tuning the reading without calibration if necessary
3. Calibration: calibration of the probe (pH and ORP only). It is recommended to calibrate from time to time, monthly.

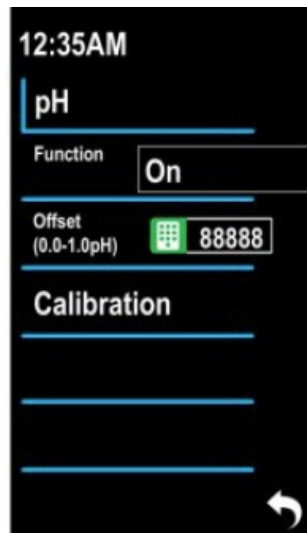**Note:**

Electrolysis: During in “Auto”, chlorine production will follow the range of Dosing 2, Chlorine. When the range of Chlorine in Dosing 2 is 700mA to 720mA, the unit will produce Chlorine which control in the range.

Calibration for samples is Pre-calibrated. No need to run the calibration procedure. If you need to run probe calibration, please send an email to “product.emaux.com.hk”

Dosing

There are three dosing pumps that can be connected.

1. Type:

- a. Dosing 1: Acid/ Alkaline
- b. Dosing 2: ORP, Chlorine
- c. Dosing 3: Others

2. Dosing mode


- a. Auto/ on/ off

3. Setting

- a. Upper/ Lower
- b. Pump rate
- c. Duty

4. Priming: Press the switch, the relay switch will close to let the connected dosing pump run continuously.

The user needs to check the dosing pump tube and press again to stop when the tube is filled up.

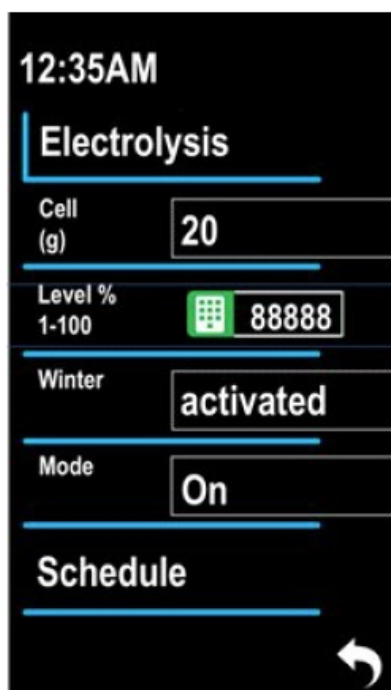

	Dosing 1	Dosing 2	Dosing 3
Dosing type	Acid/ others	Chlorine	Alkaline/ others
Auto dosing*	Yes (pH value) User input: – Pump rate	Yes (ORP value) User input: – Pump rate	Yes (pH value) refers to dosing 1
Manual dosing (on)	Yes, User input: – Duty	Yes, User input: – Duty	Yes, User input: – Duty
Dosing control range setting	Yes, pH – Alert when out of range	Yes, ORP – Alert when out of range	No
Off the device	Yes	Yes	Yes

*If the user inputs incorrectly, the chemical control will adjust the dosing rate automatically.

Default and general setup (use with salt chlorinator)

1. Dosing 1 (pH):

- a. Dosing type: Acid
- b. Dosing mode: Auto
- c. Setting: i. Upper PH: pH 7.6
- ii. Lower PH: pH 7.2
- d. Pump rate: input the dosing pump max rate
- e. Duty: don't care

2. Dosing 2 (ORP): off


3. Dosing 3 (Others) : off

4. Electrolysis: a. Mode on

Switch Pump

Switch 1, which is defaulted for the user connected to a pool pump. When the switch is activated, the user can connect the pump and schedule circulation automatically.

User can connect the underused circulation pump to the connector and turn the pump on/ off by a schedule.

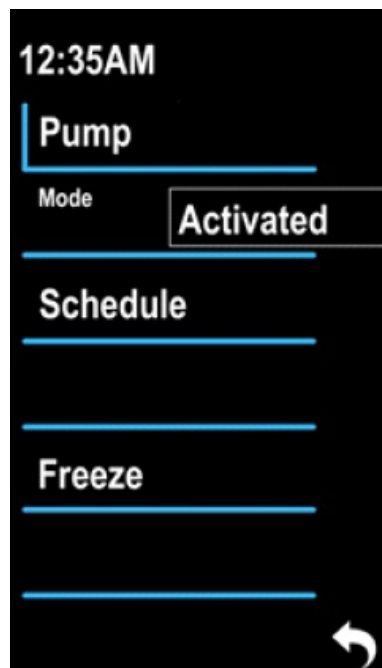

1. Mode: Activated, deactivated, off

2. Schedule: 4 scheduled times you can configure the pump

3. Freeze: freeze protection function.

- a. When the pool temperature is detected close to freezing, turn on the circulation to prevent freezing.



Switch 1-3

- a. You can configure Switch 1-3 to device either light, UV, heater, or others.



- b. Device can be set to on/ off/ Schedule mode to fit your control expectation



Intelligent control

This function is targeted at a user:

- Lack of pool chemical knowledge
- Need to minimize chemical usage
- Need full automation


After inputting the reference pool size and setting up the dosing pump. Internal DSP will test the dosing, calculate the required dosing, and optimize the chemical by AI logic. Even though a user has input incorrect values, it will detect and make the correction.

IOT, SMART LIFE PLATFORM


- Cybersync chemical controller can connect to the Smath life APP so that you can control and monitor your pool condition anytime and anywhere. Follow the general installation and setup guide to install “Smart Life” and Add a device.
- **Note:** The intelligent control function is under testing. Please connect cell, ph, ORP, and temperature probe + acid dosing on dosing 1. Function to be upgraded.

Preset:

- The device must connect to the internet through Wi- Fi, 2.4G. Make sure the router network is ready.
- Make sure the device is connected to the internet, where the Wi-Fi icon will show on the main screen.

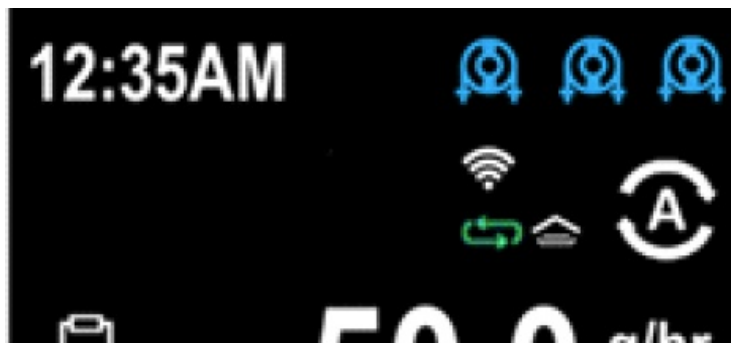


App screen

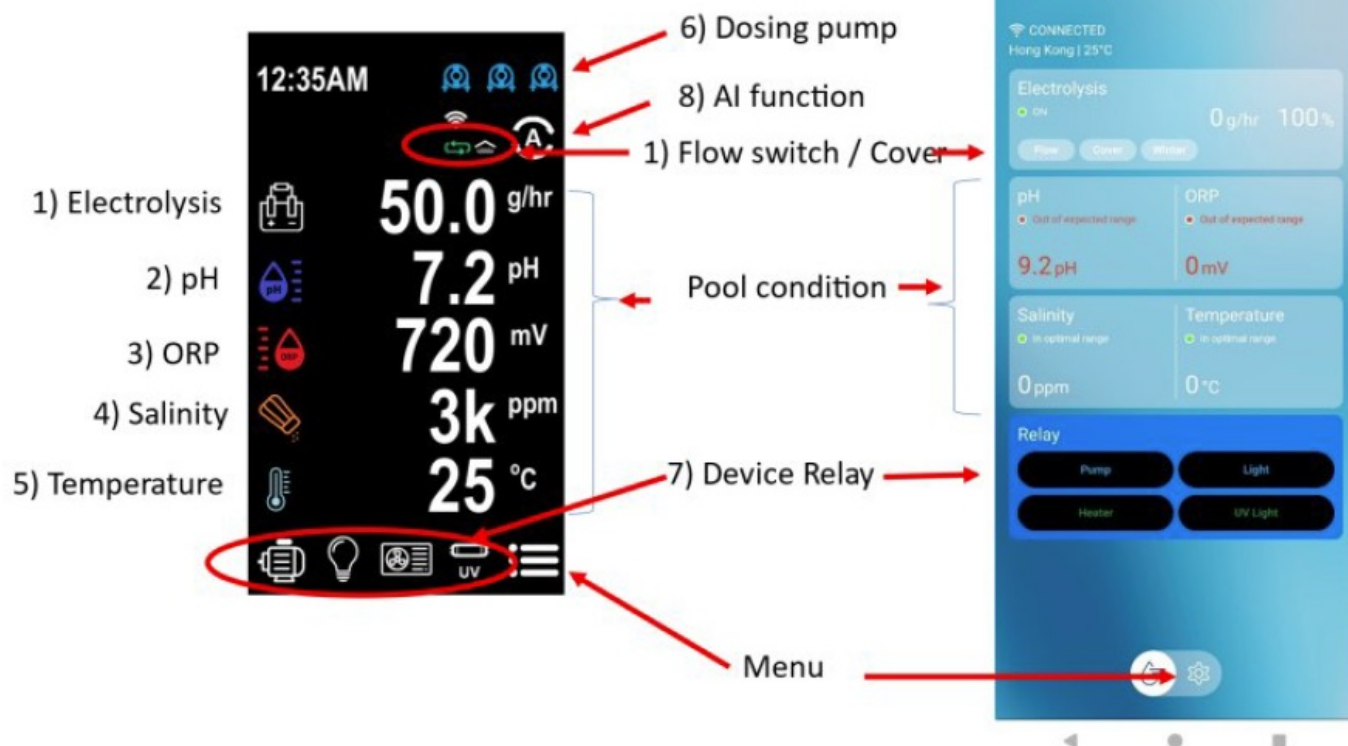



Device status

Dosing pump relay status:

- On/ Auto 
- Schedule 
- Stop 
- Error 
- disactivate 

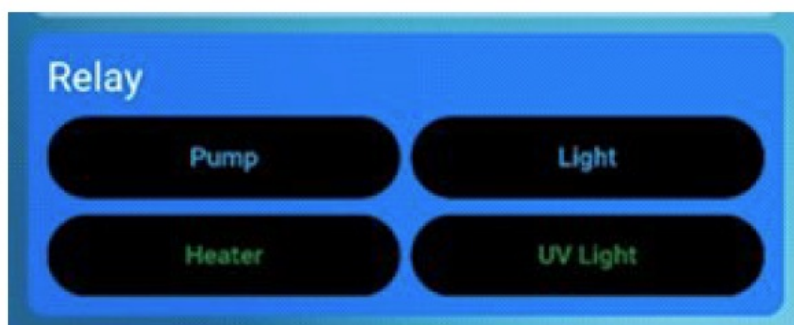

Setting Menu – Go to Menu

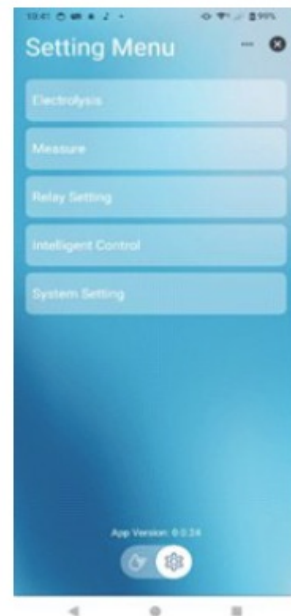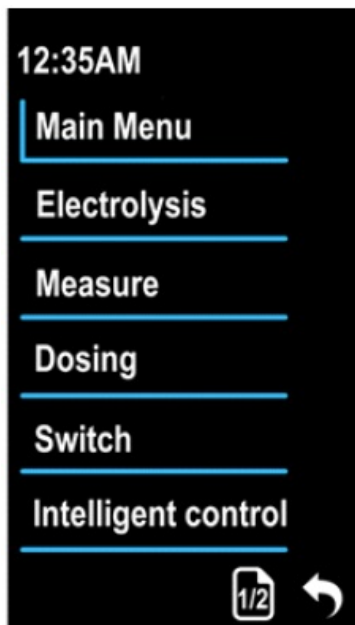

Menu screens, device, and App are sync. Besides:

1. App is allowed to modify the display name on the portable device so for higher flexibility to control
2. Device screen: Some functions, such as Priming, Probe calibration, dosing on/ off, which must be controlled on-site, would be in a device only.

Setup procedure:

1. Install App Smartlife from GooglePlay or App Store

Android (PlayStore)	iOS (AppStore)

2. Register and log in to Smartlife (3rd-party account)
3. Add a device:
 - a. Prepare an internet Wi-Fi network which is in 2.4G
 - b. On the portable device, open the App Smartlife.
 - c. Power up Cybersync, on the setup manual → Wi-Fi →
 - d. The icon will change to blue colour.
 - e. In the main page of the App, select “add device” and follow the on-screen instructions
 - f. Your Cypersync will show on the screen when detected.

Details function for Smartlife, please refer to the user manual of the Smartlife App:

CLEANING THE TITANIUM CELL

1. Turn the filtration system off.
2. Remove the salt cell from the housing.
3. Add the salt cell to the cleaning mixture making avoiding contact with the terminals.
4. Wait five to ten minutes for the Salt Cell to be cleaned.
5. If any parts of calcium are stuck or will not dissolve, carefully remove them with a smooth plastic instrument.
6. Once the salt cell is clean, rinse with fresh water and place it back in the housing, and tighten the cell or collar.
7. Turn the system back to the automatic setting or the timer. Dispose of the cleaning mixture.

If the salt cell has a heavy deposit of calcium that has not been removed after ten minutes in the cleaning solution, we recommend using a “Cell Cleaner” product, which is not as corrosive as hydrochloric acid. The cell can then be left in the cleaner for up to an hour, and will completely remove the calcium.

We recommended using Salt Cell Cleaner at all times over the traditional Hydrochloric mixture, it is a safer alternative and not harmful to your Salt Cell at all and reusable.



TERMS OF THE WARRANTY

As the original purchaser of this equipment, you have purchased from Emaux Water Technology Co Ltd, through an Authorized International Distributor or Dealer, a warranty for its products free from defects in materials and workmanship under normal use during

the warranty period. The warranty period begins on the day of purchase and extends only to the original purchaser. It is not transferable to anyone who subsequently purchases the product from you. It excludes all expendable parts.

During the warranty period, Emaux's authorized reseller will repair or replace defective parts with new parts or, at the option of Emaux, serviceable used parts that are equivalent or superior to new parts in performance. This Limited Warranty extends only to products purchased from an Emaux authorized reseller. This Limited Warranty does not extend to any product that has been damaged or rendered defective

- (a) as a result of an accident, misuse, or abuse;
- (b) as a result of an act of God;
- (c) by operation outside the usage parameters stated herein;
- (d) by the use of parts not manufactured or sold by Emaux;
- (e) by modification of the product;
- (f) as a result of war or terrorist attack; or
- (g) as a result of service by anyone other than an Emaux authorized reseller or authorized agent.

EXCEPT AS EXPRESSLY SET FORTH IN THIS WARRANTY, EMAUX MAKES NO OTHER WARRANTIES EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. EMAUX EXPRESSLY DISCLAIMS ALL WARRANTIES NOT STATED IN THIS LIMITED WARRANTY. ANY IMPLIED WARRANTIES THAT MAY BE IMPOSED BY LAW ARE LIMITED TO THE TERMS OF THIS EXPRESS LIMITED WARRANTY.

CONTACT

- EMAUX WATER TECHNOLOGY CO., LTD
- ADDRESS: 2/F, Lockhart Centre, No. 301-307
- Lockhart Road, Wanchai, Hong Kong
- PHONE +852 2832 9880
- www.emauxgroup.com

FAQ


- **Q: Can this device be used to disinfect drinking water?**

- **A:** No, this device is intended for use with swimming pools and spas only and should not be used for disinfecting drinking water.

- **Q: What is the recommended age for users of this appliance?**

- **A:** This appliance can be used by children aged 8 years and above under supervision or instruction.

Documents / Resources

	Emaux CS-A20 CyberSync Chemical Controller [pdf] Instruction Manual 24121180, CS-A20 CyberSync Chemical Controller, CS-A20, CyberSync Chemical Controller, Chemical Controller, Controller
---	--

References

- [User Manual](#)

■ Emaux

🔍 24121180, Chemical Controller, controller, CS-A20, CS-A20 CyberSync Chemical Controller, CyberSync Chemical Controller, Emaux

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.