

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Manuals.plus /

› [FODEXAZY](#) /

› FODEXAZY LED Stage Wash Light Bar ZQ06118 User Manual

FODEXAZY ZQ06118

FODEXAZY LED Stage Wash Light Bar 50W (Model ZQ06118) User Manual

Model: ZQ06118 | Brand: FODEXAZY

1. INTRODUCTION AND OVERVIEW

This manual provides essential information for the safe and effective operation of your FODEXAZY LED Stage Wash Light Bar. This 50W unit features 5 pieces of 4-in-1 RGBW COB LEDs, offering versatile lighting effects for various events. It supports multiple control modes including DMX, Sound Activated, Auto Play, and Master-Slave, making it suitable for stage lighting, parties, weddings, and live shows.

Key Features:

- **RGBW Color Mixing:** Utilizes red, green, blue, and white LEDs for a wide spectrum of colors and pure white light.
- **Matrix Design:** Multiple LED lamp beads arranged for a larger light source area and wider illumination range, ensuring uniform light output.
- **Independent Control:** Each color channel can be adjusted separately for precise color customization.
- **Multiple Operating Modes:** Includes Automatic, Music (Sound Activated), DMX, and Master-Slave modes for diverse lighting scenarios.
- **Flexible Installation:** Designed for easy installation using a bracket for various setups, including stage, performance backgrounds, and ceiling mounts.

2. WHAT'S IN THE BOX

Upon unpacking, please ensure all items listed below are present and in good condition:

- 1 x LED Stage Wash Light Bar
- 1 x Power Cord
- 1 x Instruction Manual



Image: The LED Stage Wash Light Bar, its user manual, and the power cord included in the package.


3. SETUP INSTRUCTIONS

Follow these steps to set up your LED Stage Wash Light Bar:

1. **Unpacking:** Carefully remove the light bar and all accessories from the packaging. Inspect for any damage during transit.
2. **Mounting:** The light bar comes with a bracket for flexible installation. You can use this bracket for floor standing, truss mounting, or ceiling mounting. Secure the bracket firmly using appropriate hardware (not included unless specified). The bracket allows for angle adjustment to direct the light as needed.
3. **Power Connection:** Connect the provided power cord to the 'POWER IN' port on the back of the unit. Plug the other end into a compatible power outlet (AC 90-240V, 50/60Hz).
4. **DMX Connection (Optional):** If using DMX control, connect a DMX cable from your DMX controller to the 'DMX IN' port on the light bar. For multiple units, daisy-chain them by connecting the 'DMX OUT' of the first unit to the 'DMX IN' of the next.




LCD Display

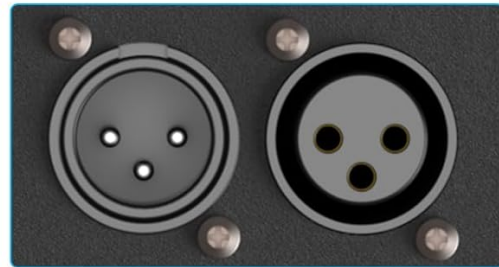

DMX Control



Power Link

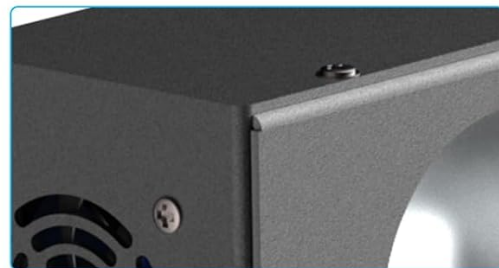

Iron Shell

Image: Detailed view of the light bar's rear panel, highlighting the LCD display, control buttons, DMX ports, and power input.

4. OPERATING MODES

The light bar offers several operating modes, selectable via the LCD display and control buttons on the rear panel:

- **Automatic Mode:** Pre-programmed lighting effects cycle automatically. Use the 'MENU' button to navigate and 'ENTER' to select.
- **Music Mode (Sound Activated):** The lighting effects respond to the rhythm and sound changes of ambient music. Ensure the built-in microphone is not obstructed.
- **DMX Mode:** For professional control, connect to a DMX controller. Refer to the DMX channel chart in the included instruction manual for specific channel functions (e.g., color, dimmer, strobe).
- **Master-Slave Mode:** Connect multiple units via DMX cables. Set one unit as 'Master' and others as 'Slave'. The slave units will synchronize with the master unit's effects.

Video: Demonstration of various lighting effects and modes of the LED Stage Wash Light Bar, including color changes and patterns.

Video: A user demonstrating the ease of use and various functions of the Stage Wash Light Bar, including manual mode selection and sound activation.

5. SPECIFICATIONS

Specification	Detail
Brand	FODEXAZY
Model Number	ZQ06118
Power Source	Corded Electric
Wattage	50 Watts
Light Source Type	Light Emitting Diode (LED)
Number of Light Sources	5 (4-in-1 RGBW COB LEDs)
Color	RGBW (Red, Green, Blue, White)
Material	Aluminum
Product Dimensions	18.58"L x 3.15"W x 3.23"H
Item Weight	4.59 pounds
Mounting Type	Bracket mount, Ceiling mount
Beam Angle	120 Degrees



Image: The light bar displaying a range of vibrant RGBW colors, highlighting its color mixing capabilities.

6. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your light bar:

- **Cleaning:** Regularly clean the exterior and lens with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- **Ventilation:** Ensure the cooling fan and vents are free from dust and obstructions to prevent overheating.
- **Storage:** When not in use, store the light bar in a dry, dust-free environment.
- **Inspection:** Periodically check power and DMX cables for any signs of wear or damage.

7. TROUBLESHOOTING

If you encounter issues, refer to the following common troubleshooting steps:

- **No Power:** Check the power cord connection to both the unit and the power outlet. Ensure the outlet is functional.

- **No Light Output:** Verify the unit is powered on and not in a 'blackout' or 'standby' mode. Check DMX connections if in DMX mode.
- **Incorrect Color/Mode:** Use the control panel buttons (MENU, UP, DOWN, ENTER) to navigate and select the desired operating mode or color settings. Refer to the detailed instructions in the included manual for specific menu options.
- **DMX Issues:** Ensure DMX cables are correctly connected (DMX IN to DMX OUT). Verify the DMX address setting on the light bar matches your controller's settings.
- **Sound Activated Mode Not Working:** Check that the microphone is not covered and that there is sufficient sound for the unit to react. Adjust sensitivity if available.

8. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the contact details provided in your product packaging or visit the official FODEXAZY website. Keep your purchase receipt as proof of purchase for any warranty claims.