



Enerwave Green Automation Smart Dual Relay Switch Module ZWN-RSM2 Manual

[Home](#) » [Enerwave Green Automation](#) » Enerwave Green Automation Smart Dual Relay Switch Module ZWN-RSM2 Manual 



Contents


- 1 Enerwave Green Automation
- 2 Smart Dual Relay Switch Module
 - 2.1 SKU: ZWN-RSM2
 - 2.2 Quickstart
 - 2.3 Important safety information
 - 2.4 What is Z-Wave?
 - 2.5 Product Description
 - 2.6 Prepare for Installation / Reset
 - 2.6.1 Reset to factory default
 - 2.6.2 Safety Warning for Mains Powered Devices
 - 2.7 Inclusion/Exclusion
 - 2.7.1 Inclusion
 - 2.7.2 Exclusion
 - 2.8 Quick trouble shooting
 - 2.9 Association – one device controls an other device
 - 2.9.1 Association Groups:
 - 2.10 Technical Data
 - 2.11 Supported Command Classes
 - 2.12 Explanation of Z-Wave specific terms
 - 2.13 Related Posts

Enerwave Green Automation

Smart Dual Relay Switch Module

SKU: ZWN-RSM2



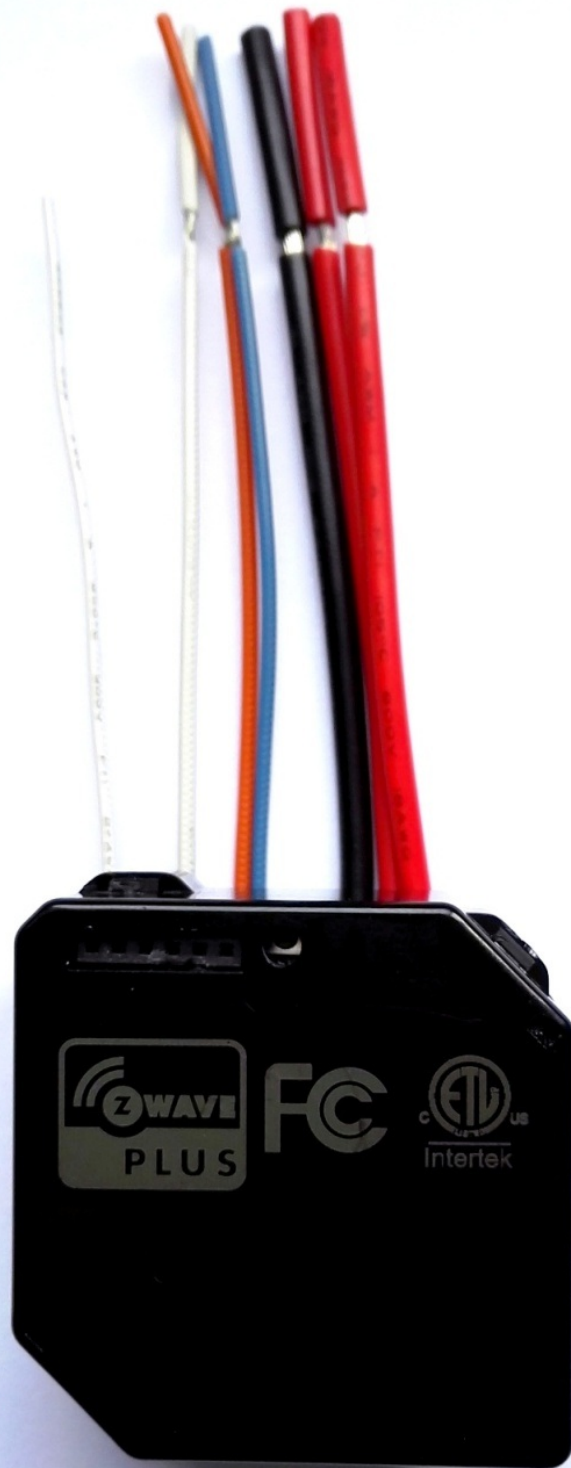

Quickstart

This is a

On/Off Power Switch

for
U.S. / Canada / Mexico.

To run this device please connect it to your mains power supply.

To add this device to your network execute the following action:

When the controller is in add mode, Press and release the program button of ZWN-RSM2 module, or Flick 3 times of the connected switch with Aux1 line (or Aux 2 line) in 1.5 second. Then the controller will add the module into current Z-Wave network.

Please refer to the
[Manufacturers Manual](#) for more information.

Important safety information

Please read this manual carefully. Failure to follow the recommendations in this manual may be dangerous or may violate the law.

The manufacturer, importer, distributor and seller shall not be liable for any loss or damage resulting from failure to comply with the instructions in this manual or any other material.

Use this equipment only for its intended purpose. Follow the disposal instructions.

Do not dispose of electronic equipment or batteries in a fire or near open heat sources.

What is Z-Wave?

Z-Wave is the international wireless protocol for communication in the Smart Home. This device is suited for use in the region mentioned in the Quickstart section.

Z-Wave ensures a reliable communication by reconfirming every message (**two-way communication**) and every mains powered node can act as a repeater for other nodes (**meshed network**) in case the receiver is not in direct wireless range of the transmitter.



This device and every other certified Z-Wave device can be **used together with any other certified Z-Wave device regardless of brand and origin** as long as both are suited for the same frequency range.

If a device supports **secure communication** it will communicate with other devices secure as long as this device provides the same or a higher level of security. Otherwise it will automatically turn into a lower level of security to maintain backward compatibility.

For more information about Z-Wave technology, devices, white papers etc. please refer to www.z-wave.info.

Product Description

The ZWN-RSM2 Switch Module has two channels switch, that is a component of lighting control system, it can not be used separately but should turn an existing switch into a Z-Wave switch. This ZWN-RSM2 module is a Z-Wave enabled device and is fully compatible with other Z-Wave certified device from other manufacturers. In a Z-Wave network, each device is designed to act as a wireless repeater. Once the ZWN-RSM2 module is installed and setup with in your wall, it will retransmit the RF signal from one device to another until the intended device to

intended device is reached. This ensures that the signal is received by its intended destination

Prepare for Installation / Reset

Please read the user manual before installing the product.

In order to include (add) a Z-Wave device to a network it **must be in factory default state**. Please make sure to reset the device into factory default. You can do this by performing an Exclusion operation as described below in the manual. Every Z-Wave controller is able to perform this operation however it is recommended to use the primary controller of the previous network to make sure the very device is excluded properly from this network.

Reset to factory default

This device also allows to be reset without any involvement of a Z-Wave controller. This procedure should only be used when the primary controller is inoperable.

Once program button is pressed and hold for 10 second, the device will send a device reset locally notification to controller. Then clear all of information for the network, and restore factory defaults, and reset the module. Use this procedure only in the event that the network primary controller is missing or otherwise inoperable.

Safety Warning for Mains Powered Devices

ATTENTION: only authorized technicians under consideration of the country-specific installation guidelines/norms may do works with mains power. Prior to the assembly of the product, the voltage network has to be switched off and ensured against re-switching.

Inclusion/Exclusion

On factory default the device does not belong to any Z-Wave network. The device needs to be **added to an existing wireless network** to communicate with the devices of this network. This process is called **Inclusion**.

Devices can also be removed from a network. This process is called **Exclusion**. Both processes are initiated by the primary controller of the Z-Wave network. This controller is turned into exclusion respective inclusion mode. Inclusion and Exclusion is then performed doing a special manual action right on the device.

Inclusion

When the controller is in add mode, Press and release the program button of ZWN-RSM2 module, or Flick 3 times of the connected switch with Aux1 line (or Aux 2 line) in 1.5 second. Then the controller will add the module into current Z-Wave network.

Exclusion

When the controller is in remove mode, Press and release the program button of ZWN-RSM2 module, or Flick 3 times of the connected switch with Aux1 line (or Aux2 line) in 1.5 second. Then the controller will remove the module from current Z-Wave network.

Quick trouble shooting

Here are a few hints for network installation if things dont work as expected.

1. Make sure a device is in factory reset state before including. In doubt exclude before include.
2. If inclusion still fails, check if both devices use the same frequency.
3. Remove all dead devices from associations. Otherwise you will see severe delays.

4. Never use sleeping battery devices without a central controller.
5. Dont poll FLIRS devices.
6. Make sure to have enough mains powered device to benefit from the meshing

Association – one device controls an other device

Z-Wave devices control other Z-Wave devices. The relationship between one device controlling another device is called association. In order to control a different device, the controlling device needs to maintain a list of devices that will receive controlling commands. These lists are called association groups and they are always related to certain events (e.g. button pressed, sensor triggers, ...). In case the event happens all devices stored in the respective association group will receive the same wireless command wireless command, typically a 'Basic Set' Command.

Association Groups:

Group NumberMaximum NodesDescription

1	1	Z-Wave Plus Lifeline:Send device reset locally notification;Switch Binary Report
2	3	StatusReport_EP1: Switch Binary Report
3	3	StatusReport_EP1: Switch Binary Report

Technical Data

Hardware Platform	ZM5202
Device Type	On/Off Power Switch
Network Operation	Always On Slave
Firmware Version	HW: 1 FW: 5.11
Z-Wave Version	6.51.09
Certification ID	ZC10-17035461
Z-Wave Product Id	0x011A.0x0111.0x0605
Switch Type	Toggle
Frequency	XXfrequency
Maximum transmission power	XXantenna

Supported Command Classes

- Association Grp Info
- Association V2
- Basic
- Device Reset Locally
- Manufacturer Specific V2
- Multi Channel Association V3
- Multi Channel V4
- Powerlevel

- Switch All
- Switch Binary
- Version V2
- Zwaveplus Info V2

Explanation of Z-Wave specific terms

- **Controller** — is a Z-Wave device with capabilities to manage the network.
Controllers are typically Gateways, Remote Controls or battery operated wall controllers.
- **Slave** — is a Z-Wave device without capabilities to manage the network.
Slaves can be sensors, actuators and even remote controls.
- **Primary Controller** — is the central organizer of the network. It must be a controller. There can be only one primary controller in a Z-Wave network.
- **Inclusion** — is the process of adding new Z-Wave devices into a network.
- **Exclusion** — is the process of removing Z-Wave devices from the network.
- **Association** — is a control relationship between a controlling device and a controlled device.
- **Wakeup Notification** — is a special wireless message issued by a Z-Wave device to announces that is able to communicate.
- **Node Information Frame** — is a special wireless message issued by a Z-Wave device to announce its capabilities and functions.