

Wancle CBG-8002

Wancle CBG-8002 Flat Burr Coffee Grinder User Manual

Model: CBG-8002

1. INTRODUCTION

Thank you for choosing the Wancle CBG-8002 Flat Burr Coffee Grinder. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your new coffee grinder. Please read these instructions carefully before first use and retain them for future reference.

2. IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions before using the appliance.
- Do not immerse the motor base in water or other liquids.
- Close supervision is necessary when any appliance is used by or near children.
- Unplug from outlet when not in use, before assembling or disassembling parts, and before cleaning.
- Avoid contact with moving parts.
- Do not operate any appliance with a damaged cord or plug, or after the appliance malfunctions or has been dropped or damaged in any manner.
- The use of attachments not recommended or sold by the manufacturer may cause fire, electric shock, or injury.
- Do not use outdoors.
- Do not let cord hang over edge of table or counter, or touch hot surfaces.
- Do not place on or near a hot gas or electric burner, or in a heated oven.

- Check the bean hopper for the presence of foreign objects before use.
- This appliance is for household use only.

3. PRODUCT OVERVIEW

The Wancle CBG-8002 is a flat burr coffee grinder designed for precise and consistent grinding. It features a compact design and user-friendly controls.



Image 3.1: The Wancle CBG-8002 Flat Burr Coffee Grinder, showcasing its main components including the bean hopper, control panel, and ground coffee container, surrounded by coffee beans and ground coffee.

Components:

- **Bean Hopper:** Holds whole coffee beans. Features a lid and grind setting dial.
- **Upper Burr:** Removable for cleaning.
- **Lower Burr:** Fixed grinding component.
- **Control Panel:** Includes power button and cup selection dial.
- **Ground Coffee Container:** Collects ground coffee.
- **Cleaning Brush:** For maintenance.

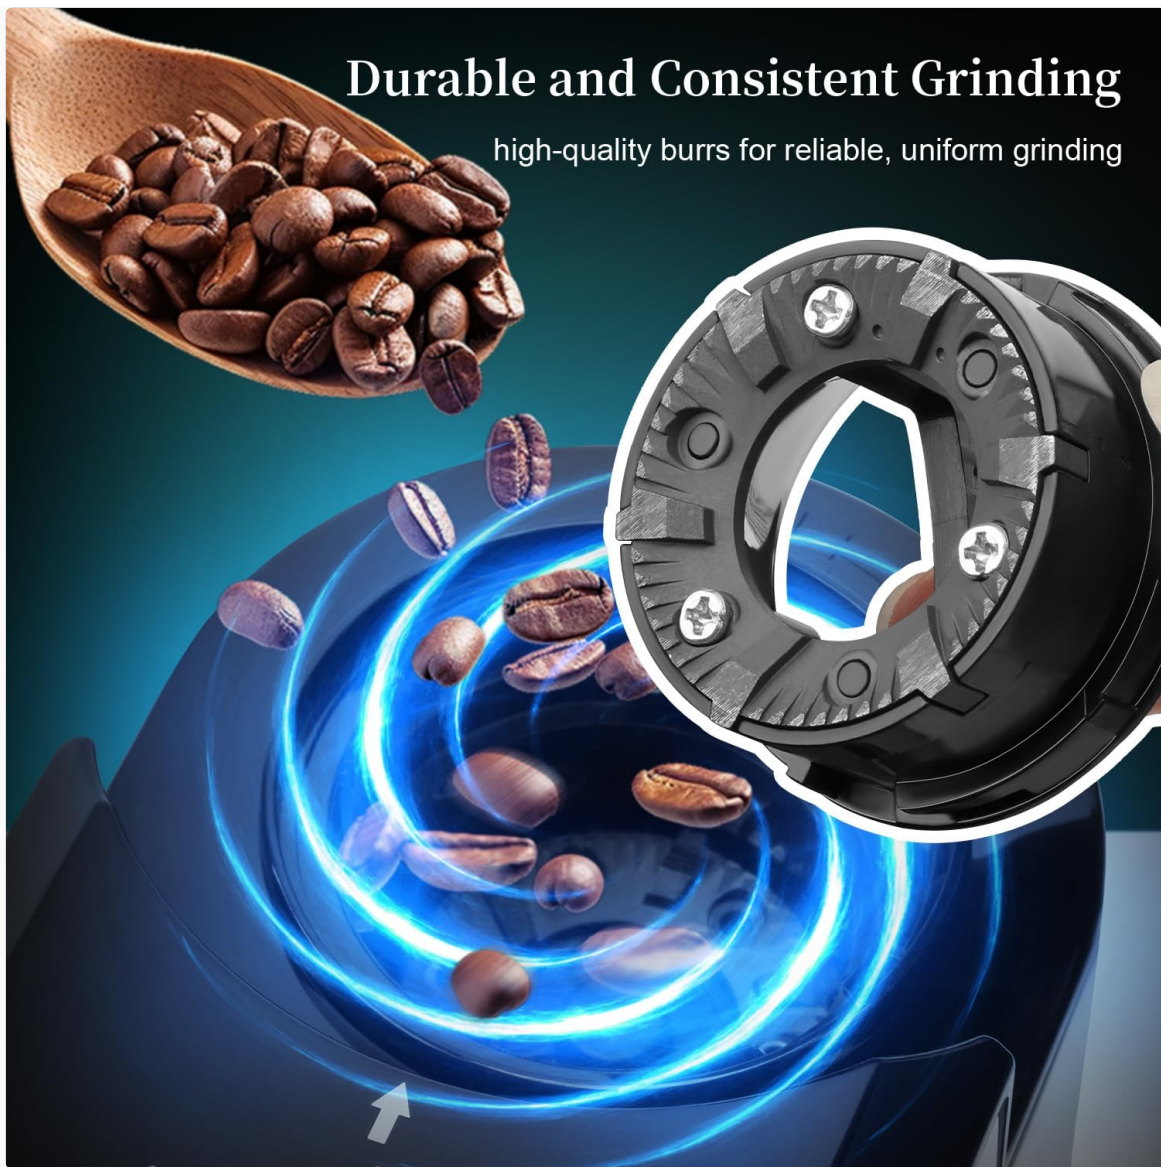


Image 3.2: Close-up view of the high-quality burr grinding mechanism, emphasizing its role in delivering uniform coffee grounds for optimal flavor extraction.

4. SETUP

1. **Unpack:** Carefully remove all components from the packaging.
2. **Clean:** Before first use, clean the bean hopper lid, bean hopper, upper burr, and ground coffee container with warm, soapy water. Rinse thoroughly and dry completely. The motor base should only be wiped with a damp cloth.
3. **Assemble:**
 - Ensure the lower burr is clean and free of debris.
 - Place the upper burr back into position, ensuring it clicks securely.
 - Align the bean hopper onto the motor base. Rotate it clockwise until it locks into place. Ensure the arrows on the hopper and base align for proper seating.
 - Insert the ground coffee container into its slot at the front of the grinder. Ensure it is fully inserted and clicks into place.
4. **Placement:** Place the grinder on a stable, flat, and dry surface.

5. **Power Connection:** Plug the power cord into a standard 100-120V AC electrical outlet.



Image 4.1: The Wancle CBG-8002 coffee grinder positioned on a kitchen countertop next to a shelf with cups, illustrating its compact and space-saving design with dimensions indicated.

5. OPERATING INSTRUCTIONS

1. **Add Coffee Beans:** Open the bean hopper lid and pour whole roasted coffee beans into the hopper. Do not overfill. Replace the lid securely.
2. **Select Grind Setting:** Rotate the bean hopper to select your desired grind setting. The grinder offers 28 precision settings, from fine (1) to coarse (28). Refer to Section 6 for guidance on grind settings.
3. **Select Cup Capacity:** Rotate the cup selection dial on the control panel to choose the number of cups you wish to grind, from 2 to 12 cups.
4. **Start Grinding:** Press the power button once to begin grinding. The grinder will automatically stop once the selected quantity is reached. If you selected the maximum capacity (12 cups), you may need to press the button again to stop it manually if you wish to grind less than the full hopper.

5. **Remove Ground Coffee:** Once grinding is complete, carefully pull out the ground coffee container from the front of the grinder.
6. **Brew:** Use the freshly ground coffee immediately for optimal flavor.



Image 5.1: The Wancle CBG-8002 coffee grinder demonstrating its 2-12 cup capacity control feature, with indicators for 3 oz of beans and 2-12 cups of ground coffee, alongside a brewed coffee setup.



Image 5.2: The Wancle CBG-8002 coffee grinder in a kitchen setting, with coffee being prepared using a pour-over method, highlighting its integration into a coffee brewing routine.

6. GRIND SETTINGS GUIDE

The Wancle CBG-8002 offers 28 grind settings to suit various brewing methods. Experimentation is encouraged to find your preferred grind for specific beans and brewing equipment.

28 Precision Grind Settings

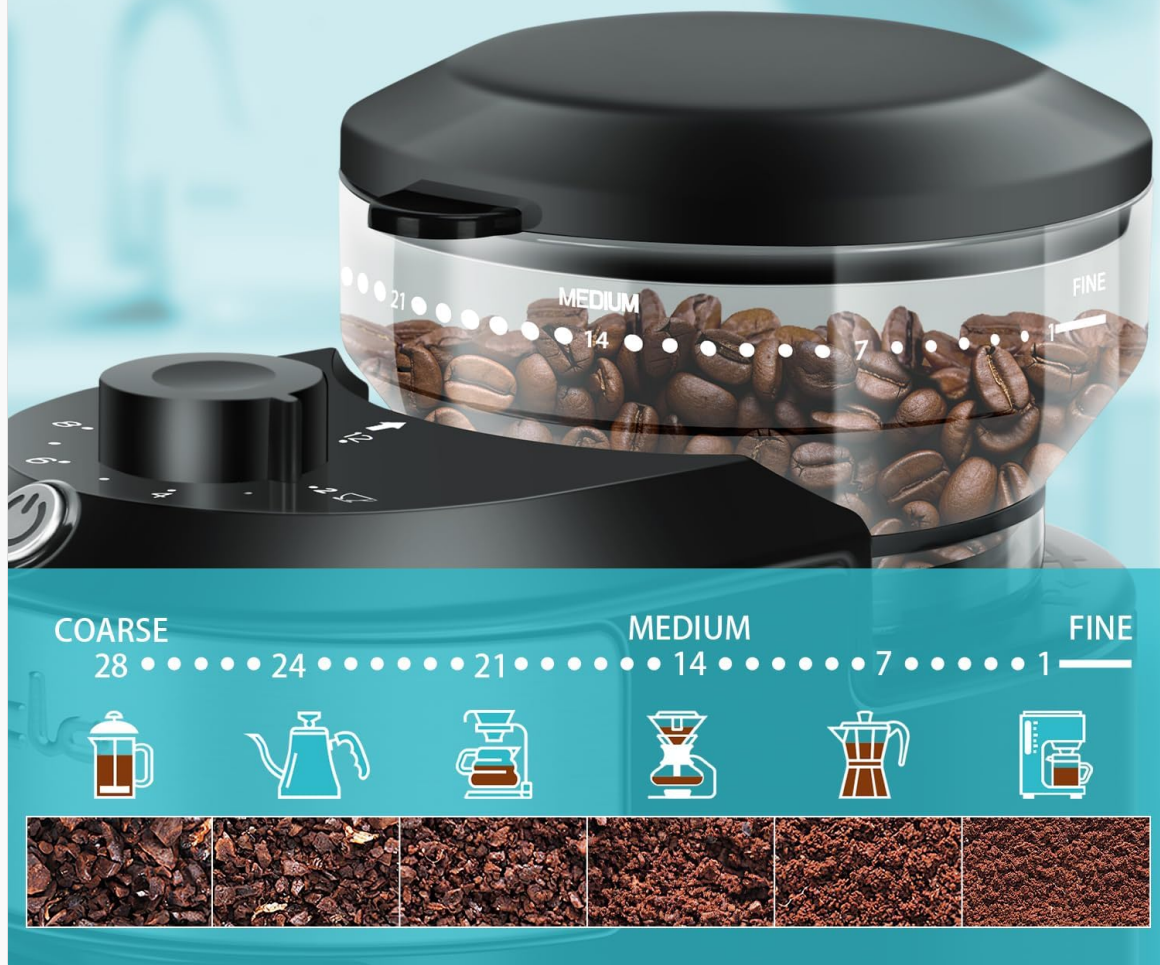


Image 6.1: Visual representation of the 28 grind settings on the Wangle CBG-8002, ranging from fine to coarse, with corresponding icons for different brewing methods like espresso, drip, and French press, and examples of ground coffee textures.

Recommended Settings:

- **Fine (Settings 1-7):** Ideal for Espresso machines and Moka pots. Produces a powder-like consistency.
- **Medium (Settings 8-20):** Suitable for Drip coffee makers, Pour-over, and Aeropress. Resembles table salt.
- **Coarse (Settings 21-28):** Best for French Press and Cold Brew. Has a flaky, sea salt-like texture.

7. CLEANING AND MAINTENANCE

Regular cleaning ensures optimal performance and extends the life of your grinder. Always unplug the grinder before cleaning.

1. **Empty Hopper:** Ensure the bean hopper is empty of whole beans.

2. **Remove Ground Coffee Container:** Pull out the ground coffee container and empty it. Wash with warm, soapy water, rinse, and dry thoroughly.
3. **Remove Bean Hopper:** Rotate the bean hopper counter-clockwise to unlock and lift it off the motor base.
4. **Remove Upper Burr:** Gently lift the upper burr out of its housing.
5. **Clean Burrs:** Use the provided cleaning brush to remove any coffee grounds from both the upper and lower burrs. Do not wash the burrs with water.
6. **Clean Hopper and Lid:** Wash the bean hopper and its lid with warm, soapy water, rinse, and dry completely.
7. **Clean Motor Base:** Wipe the exterior of the motor base with a damp cloth. Do not immerse the motor base in water.
8. **Reassemble:**
 - Place the upper burr back into its position, ensuring it is seated correctly.
 - Align the bean hopper onto the motor base, ensuring the arrows align. Rotate clockwise until it locks securely.
 - Slide the dry ground coffee container back into place until it clicks.

Compact and Space-Saving



Image 7.1: A hand using the provided cleaning brush to remove coffee grounds from the removable upper burr of the Wancle CBG-8002 coffee grinder, demonstrating the ease of cleaning.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Grinder does not start.	Not plugged in; Bean hopper or ground coffee container not correctly assembled.	Ensure power cord is securely plugged in. Check that the bean hopper is locked into place and the ground coffee container is fully inserted.
Ground coffee container is difficult to remove.	Tight fit or coffee grounds accumulation.	Gently wiggle the container while pulling. Ensure it is clean and free of sticky residue. Avoid forcing it.
Inconsistent grind.	Burrs are dirty or worn; Incorrect grind setting for bean type.	Clean the burrs thoroughly using the provided brush. Adjust grind setting as needed. If burrs are worn, contact customer support.
Grinder stops unexpectedly.	Overheating; Foreign object in burrs.	Unplug and allow to cool for 30 minutes. Check burrs for obstructions and clean if necessary.

9. SPECIFICATIONS

- **Model:** CBG-8002
- **Brand:** Wancle
- **Color:** Black+Stainless Steel
- **Voltage:** 100-120V
- **Power:** 200W
- **Product Dimensions:** 6.3"L x 3.7"W x 7.4"H (162mm L x 90mm W x 190mm H)
- **Capacity (Beans):** Approximately 80 Grams
- **Item Weight:** 0.317 ounces (Note: This weight seems unusually low and may refer to a specific component. The full product weight is typically higher.)
- **Grind Settings:** 28 Precision Settings
- **Cup Capacity:** 2-12 Cups

10. WARRANTY AND SUPPORT

For warranty information, technical support, or service inquiries, please refer to the warranty card included with your product or contact Wancle customer support directly. Contact details can typically be found on the official Wancle website or through your retailer.

© 2025 Wancle. All rights reserved.