


ENFORCER
SS-075CQ
Emergency
Push To Exit
Buttons

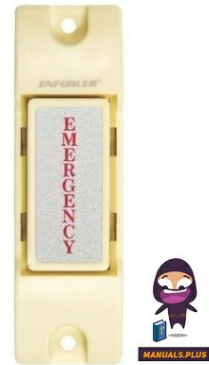

ENFORCER SS-075CQ Emergency Push To Exit Buttons Installation Guide

[Home](#) » [ENFORCER](#) » ENFORCER SS-075CQ Emergency Push To Exit Buttons Installation Guide 

Contents

- [1 ENFORCER SS-075CQ Emergency Push To Exit Buttons](#)
- [2 Product Usage Instructions](#)
- [3 FAQs](#)
- [4 PRODUCT INFORMATION](#)
- [5 Features](#)
- [6 CONTACT INFORMATION](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

ENFORCER

ENFORCER SS-075CQ Emergency Push To Exit Buttons



Product Usage Instructions

Installation:

1. Visit the SECO-LARM website www.seco-larm.com for complete installation instructions.
2. Read the manual provided before beginning the installation process.
3. Identify the appropriate button model based on your requirements.
4. Connect the button to the power source using the screw terminals.
5. Mount the button securely in the desired location.

Operation:

To trigger the emergency or push-to-exit function, press the button firmly. The selected contact type (NO or NC) will be activated momentarily, depending on the model chosen.

Maintenance:

Regularly check the button for any signs of damage or wear. Clean the button surface as needed to ensure clear visibility of the labels.

FAQs

- **Q: Can I change the label on the button?**

- A: Yes, the Emergency & Push-to-Exit, NO/NC Button SS-075C-PEQ comes with three labels for customization: Emergency, Push to Exit, and Press Para Exit.

- **Q: What is the contact rating for these buttons?**

- A: The contact rating varies depending on the model chosen. It is either 0.5A@12VDC or 1.0A@12VDC.

- **Q: Are these buttons suitable for outdoor use?**

- A: It is recommended to check the product specifications and IP rating to determine if the buttons are suitable for outdoor installations.

PRODUCT INFORMATION

Emergency/Push-to-Exit Buttons

Please visit the SECO-LARM website www.seco-larm.com for complete installation instructions. Please read the manual before you begin the installation

Features

Emergency NO/NC Button

SS-075CQ

Features

- Large button has “Emergency” printed on the face
- NO or NC (selectable) momentary contact
- Contact rated 0.5A@12VDC
- Screw terminals
- Off-white
- Dimensions: 3"x15/16"x5/8" (76x23x15 mm)



Emergency N.O. Button

SS-075Q

Features

- Large button has “Emergency” printed on face
- N.O. (push-to-close) momentary contact
- Contact rated 0.5A@12VDC
- Screw terminals
- Off-white
- Dimensions: 3"x15/16"x5/8" (76x23x15 mm)



Emergency & Push-to-Exit,

NO/NC Button

SS-075C-PEQ

Features

- Three labels included: choose between “Emergency”, “Push to Exit”, and “Presione Para Salir”
- NO or NC (selectable) momentary contact
- Contact rated 1.0A@12VDC
- Screw terminals
- Off-white
- Dimensions: 3"x15/16"x5/8" (76x23x15 mm)




CONTACT INFORMATION

- SECO-LARM® U.S.A., Inc.
- 16842 Millikan Avenue, Irvine, CA 92606
- Phone: [949-261-2999](tel:949-261-2999)
- [800-662-0800](tel:800-662-0800) Fax: [949-261-7326](tel:949-261-7326)

- Website: www.seco-larm.com
- Email: sales@seco-larm.com

Copyright © 2024 SECO-LARM U.S.A, Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to Phone: change prices and specifications without notice. SECO-LARM is not responsible for misprints.

Documents / Resources



[ENFORCER SS-075CQ Emergency Push To Exit Buttons](#) [pdf] Installation Guide
 SS-075CQ, SS-075Q, SS-075C-PEQ, SS-075CQ Emergency Push To Exit Buttons, SS-075CQ,
 Emergency Push To Exit Buttons, Exit Buttons, Buttons

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.