

ENFORCER®

SS-075Q

Emergency Push
To Exit Buttons



ENFORCER SS-075Q Emergency Push To Exit Buttons Owner's Manual

[Home](#) » [ENFORCER](#) » ENFORCER SS-075Q Emergency Push To Exit Buttons Owner's Manual 

Contents

- [1 ENFORCER SS-075Q Emergency Push To Exit Buttons](#)
- [2 MODELS](#)
- [3 Parts List](#)
- [4 Specifications](#)
- [5 Installation](#)
- [6 Overview](#)
- [7 CONTACT](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

ENFORCER®

ENFORCER SS-075Q Emergency Push To Exit Buttons



MODELS

SS-075Q / SS-075CQ / SS-075C-PEQ



- Large button has “Emergency” printed on face*
- NO or NC (selectable) momentary contact†
- Contact rated 0.5A@12VDC (1.0A@12VDC for SS-075C-PEQ)
- Screw terminals
- Off-white

Parts List

1x Button
1x Manual

SS-075C-PEQ includes 3 labels “Emergency”, “Push to Exit”, and “Presione Para Salir,”

†SS-075Q is N.O. (push-to-close) momentary contact only

Specifications


| Model | SS-075Q | SS-075CQ | SS-075C-PEQ |
|-----------------------|---|--|-------------|
| Operating voltage | 12~24 VDC | | |
| Contact | N.O. (Push-to-close) | N.O. or N.C. (Selectable) momentary contact | |
| Switch rating | 0.5A@12VDC | | 1A@12VDC |
| Connections | Screw terminals | | |
| Operating humidity | 0~95%, non-condensing | | |
| Operating temperature | -40°~167° F (-40°~75° C) | | |
| Dimensions | 3"x ¹⁵ / ₁₆ "x ⁵ / ₈ " (76x23x15mm) | | |

Installation

Please read this manual carefully before you begin the installation.

1. Find the appropriate location to mount the button.
2. Run 2 wires to the mounting location from the device you want to control.
3. Connect the 2 wires to the back of the button.
 1. To either the NO/COM or NC/COM for the SS-075CQ or SS-075C-PEQ
 2. To the NO/COM for the SS-075Q
4. Mount the button.

Overview

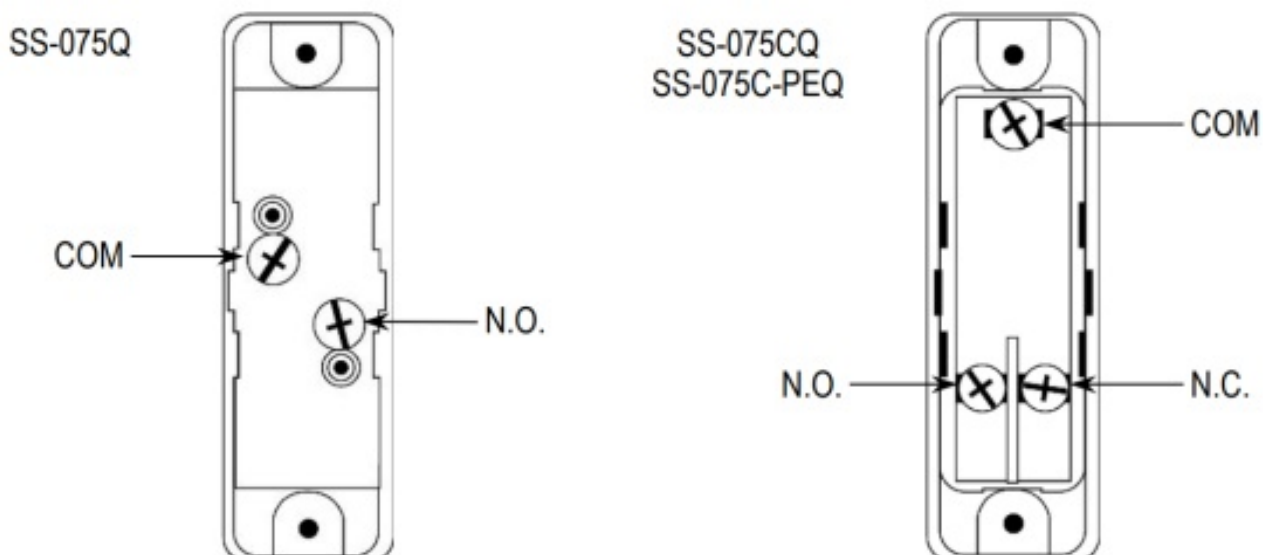

California Proposition 65 Warning: These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information, go to www.P65Warnings.ca.gov

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer.


NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice.
SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2024 SECO-LARM U.S.A., Inc.
All rights reserved.

CONTACT

SECO-LARM ® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606 **Website:** www.seco-larm.com
Phone: [949-261-2999](tel:949-261-2999) | [800-662-0800](tel:800-662-0800) **Email:** sales@seco-larm.com
® PITSW1
Order Part# 763-045-1%
MI_SS-075xxxx_240105_ML.docx

Documents / Resources

| | |
|---|---|
|  | <p>ENFORCER SS-075Q Emergency Push To Exit Buttons [pdf] Owner's Manual SS-075Q, SS-075CQ, SS-075C-PEQ, SS-075Q Emergency Push To Exit Buttons, SS-075Q, E mergency Push To Exit Buttons, Push To Exit Buttons, Exit Buttons, Buttons</p> |
|---|---|

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.