

ENGO CONTROLS ELS ZigBee Water Leak Sensor User Guide

Home » ENGO CONTROLS » ENGO CONTROLS ELS ZigBee Water Leak Sensor User Guide 🖺







Contents

- 1 Device description
- 2 Technical specifications
- 3 Introduction
- **4 Product features**
- **5 Product Compliance**
- **6 Safety information**
- 7 Installation
- 8 Installation sensor in the app
- 9 Documents / Resources
 - 9.1 References

Device description



1. Function button

Pressing for 8 seconds activates pairing mode and factory reset

2. Two colour LED diode

Flashing reed – active pairing mode with the application Single red flash – motion detection

- 3. Flood Sensors
- 4. Battery socket


Technical specifications

Power supply	Battery CR2032
Communication	ZigBee 3.0, 2.4GHz
IP protection class	IP66
Dimensions [mm]	Ф50×18

Introduction

The battery-powered Water Leakage Sensor is communicating via ZigBee 3.0 protocol. The sensor is characterised by its high sensitivity and speed of water leakage detection. It reacts immediately to the presence of water, minimising the risk of damage caused by flooding. With in-app alarms and LED signalling, the user is immediately informed about the leakage. The ZigBee internet gateway is required for installation in the app.

Product features

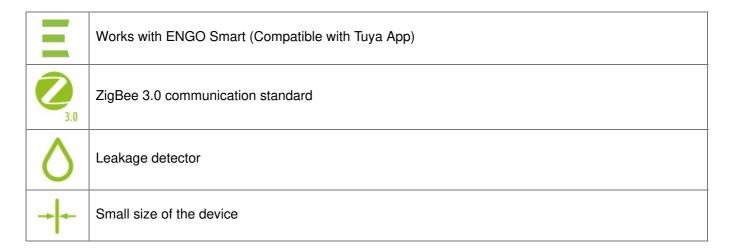

Product Compliance

This product complies with the following EU Directives: 2014/53/EU, 2011/65/EU.

Safety information

Use in accordance with national and EU regulations. Use the device only as intended, keeping it in a dry condition. The product is for indoor use only. Installation must be carried out by a qualified person in accordance with national and EU regulations.

Installation

Installation must be performed by a qualified person with appropriate electrical qualifications, in accordance with the standards and regulations in force in a given country and in the EU. The manufacturer is not responsible for non-compliance with the instructions.




For the entire installation, there may be additional protection requirements, which the installer is responsible for.

Installation sensor in the app

Make sure your router is within range of your smartphone. Make sure you are connected to the Internet. This will reduce the pairing time of the device.


STEP 1 - DOWNLOAD ENGO SMART APP

Download the ENGO Smart app from Google Play or Apple App Store and install it on your smartphone.



STEP 2 - REGISTER THE NEW ACCOUNT

To register a new account, please follow the steps below:

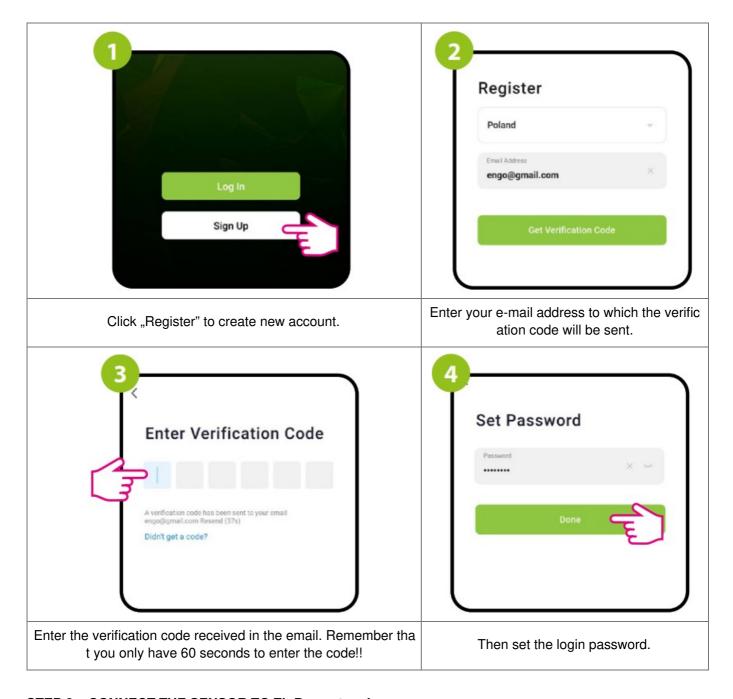

STEP 3 – CONNECT THE SENSOR TO ZigBee network

After installing the application and creating an account, follow these steps:






Make sure ZigBee gateway has been added to the Engo Smart app.

Press and hold the button for about 10 seconds until the green LED starts flashing.


The sensor will enter pairing mode.

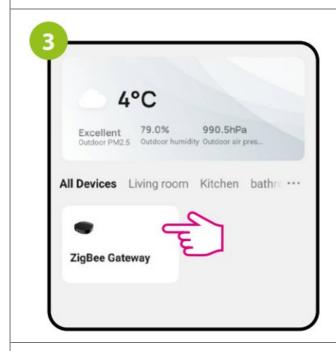




Enter the gateway interface.

In, Zigbee devices list" go "Add devices".

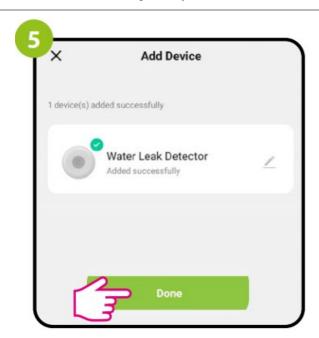

Wait until the application finds the device and click "D one".

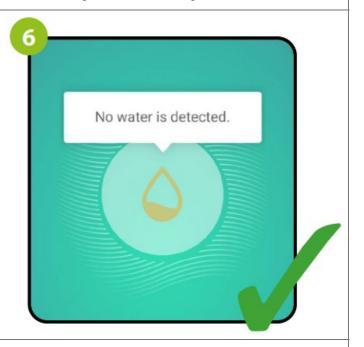

The sensor has been installed and displays the main int erface.



https://engocontrols.com/redirect-app/

Ver. 1.0

Release date: VIII 2024

Soft: V1.0.3



Producer:

Engo Controls sp. z o.o. sp. k. 43-262 Kobielice

Rolna 4 St.

Poland www.engocontrols.com

Documents / Resources



ENGO CONTROLS ELS ZigBee Water Leak Sensor [pdf] User Guide

ELS ZigBee Water Leak Sensor, ELS, ZigBee Water Leak Sensor, Water Leak Sensor, Leak Sensor, Sensor

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.