



ENS TAB20121 FlexiPole Tab Plus Installation Guide

[Home](#) » [ENS](#) » ENS TAB20121 FlexiPole Tab Plus Installation Guide 

Contents


- [1 ENS TAB20121 FlexiPole Tab Plus Installation](#)
- [2 Quick Installation Guide – TAB20121 + TAB40121](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)



ENS TAB20121 FlexiPole Tab Plus Installation



Quick Installation Guide – TAB20121 + TAB40121

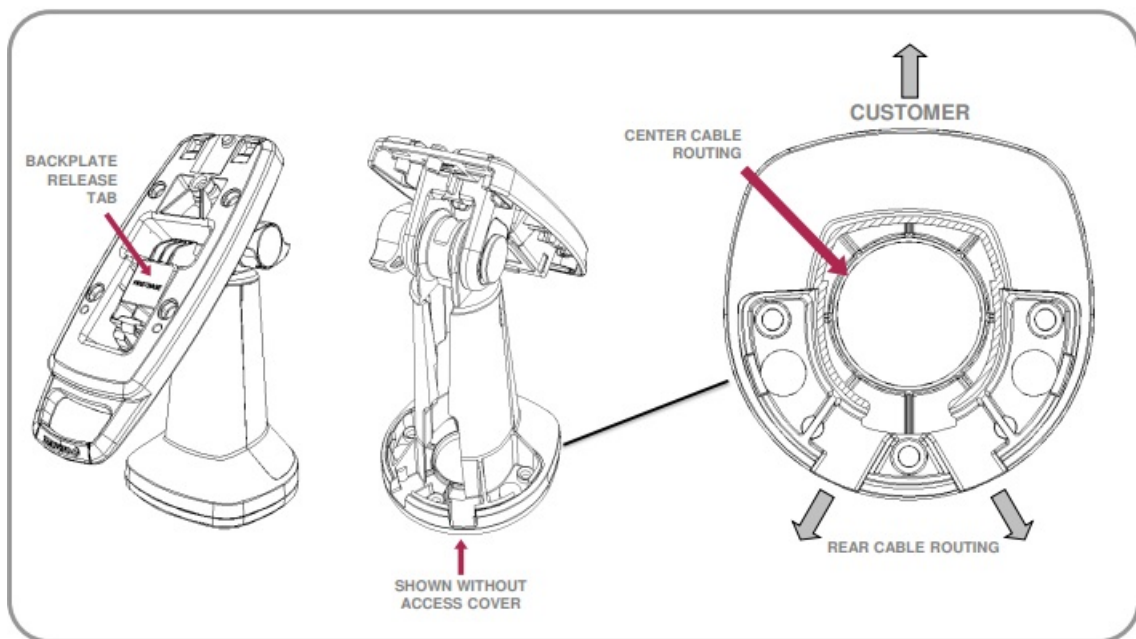

TOOLS

- 1) Phillips screwdriver
- 2) Drill if mounting to surface with screws

Use qualified personnel

Note
No drill required if using adhesive pad provided.

PARTS

1X

1X

1X

1

Drill hole to route Cable thru counter 40mm diameter max

3X Mounting holes Use appropriate #8 flat head screws for the surface being mounted to

Note
For screw mount – use stand as a template. Drill/screwdriver will be required. *Use qualified personnel.*

Top View

2


Cable routing option 1

Cable routing option 2

Important Note
To fit back cover first engage lower clip, second engage top clip.

3

Pivot Tension Adjustment Dial

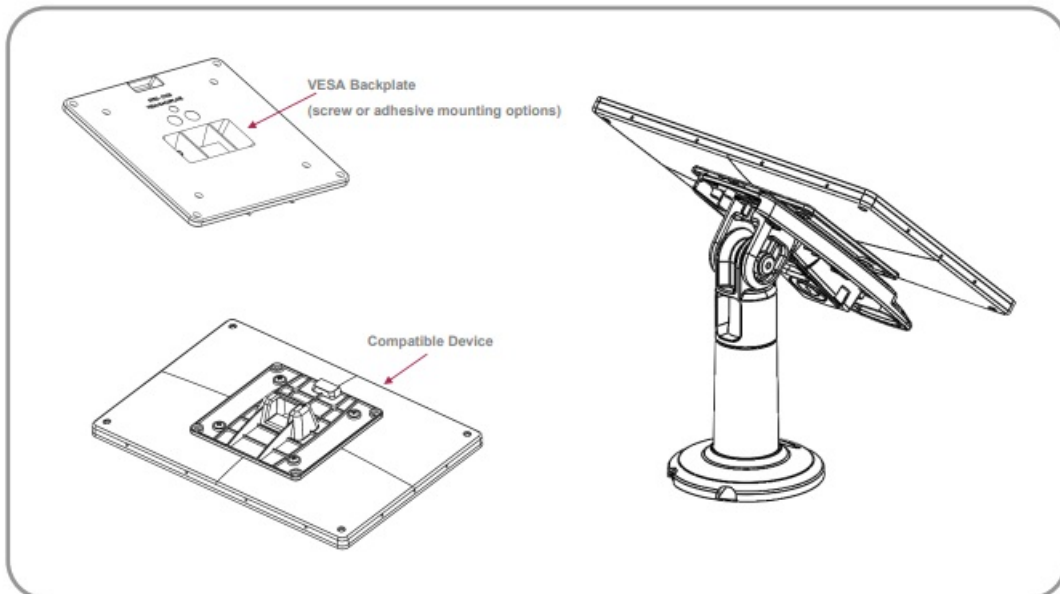

TOOLS

PZ

2 min

PARTS

1 x VESA Backplate (with VHB adhesive pad)

4 x M4x8mm screws

1

Step 1
Align holes of VESA backplate with corresponding mounting holes of device.
Or fix to device at desired orientation with VHB pad

2

Step 2
If fitting with screws use screwdriver to hand tighten.
(M4 screws supplied. For other sizes refer to display manufacturer handbook)


3

Step 3
Fit device onto stand. Press firmly until click.

OPTIONAL

SAFEBASE OPTION
To lock device, turn key clockwise then remove key.
To unlock, turn counter-clockwise.

To remove device



[ENS TAB20121 FlexiPole Tab Plus](#) [pdf] Installation Guide
TAB20121, TAB40121, FlexiPole Tab Plus, FlexiPole, Tab Plus

Manuals+.