



ENVIRO C34 Fireplace Installation Guide

[Home](#) » [Enviro](#) » ENVIRO C34 Fireplace Installation Guide 

ENVIRO C34 Fireplace Installation Guide




Contents

- [1 Minimum Framing Dimensions](#)
- [2 Clearance to Combustibles](#)
- [3 Non-Combustible Board Placement](#)
- [4 Minimum Venting Requirements](#)
- [5 Fireplace Dimensions](#)
- [6 Mantel Projections](#)
- [7 Dimensions](#)
- [8 TV Installation Considerations](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)


Minimum Framing Dimensions

Depth	20"	508 mm
Width	45"	1143 mm
Header Height	38"	965 mm
Rough Opening Height	43.5"	1105mm
Enclosure Ceiling	65"	1651 mm

Note: Vent size = Co-axial 5 x 8"

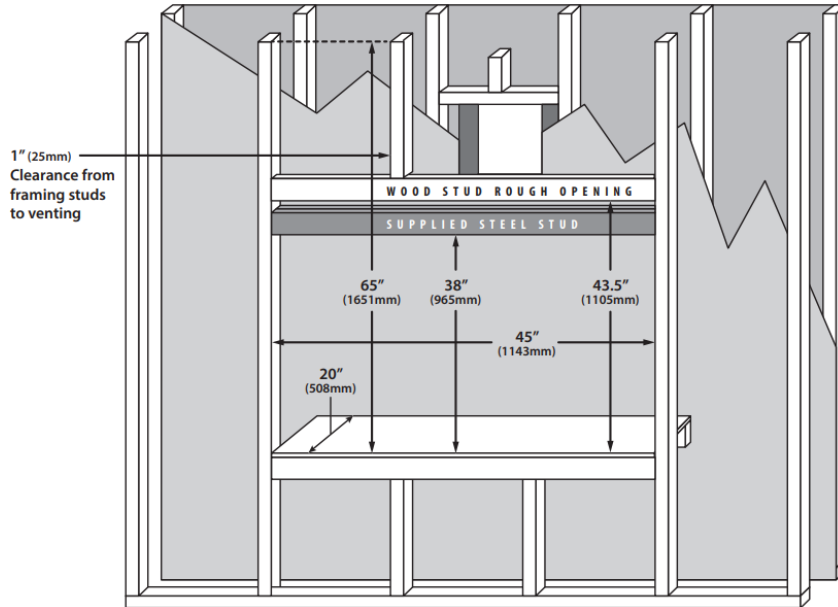


Clearance to Combustibles

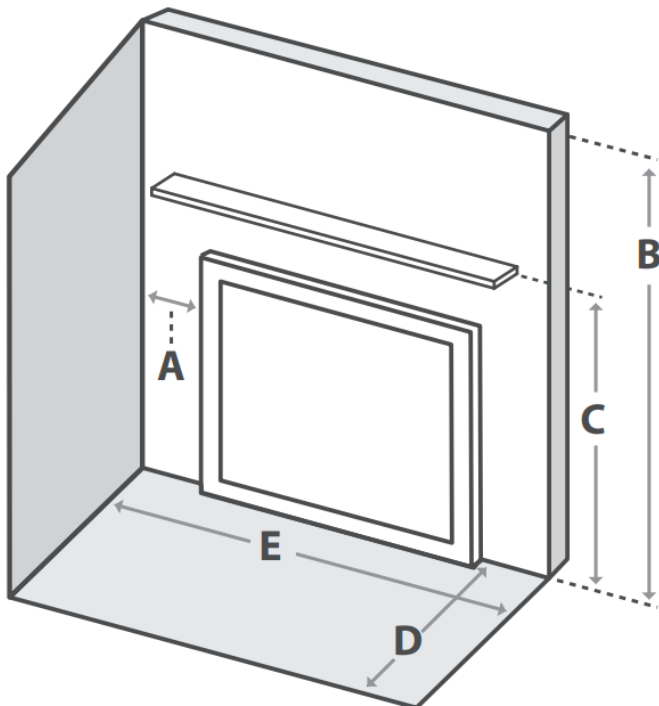


A – Finishing edge to side wall	7"	229mm
B – Minimum clearance to enclosure ceiling	65"	1651 mm
C – Minimum clearance to mantel height	See Chart	See Chart
D – Front of door to edge of floor protection	0"	0 mm
E – Minimum alcove width	50"	1270 mm

Non-Combustible Board Placement

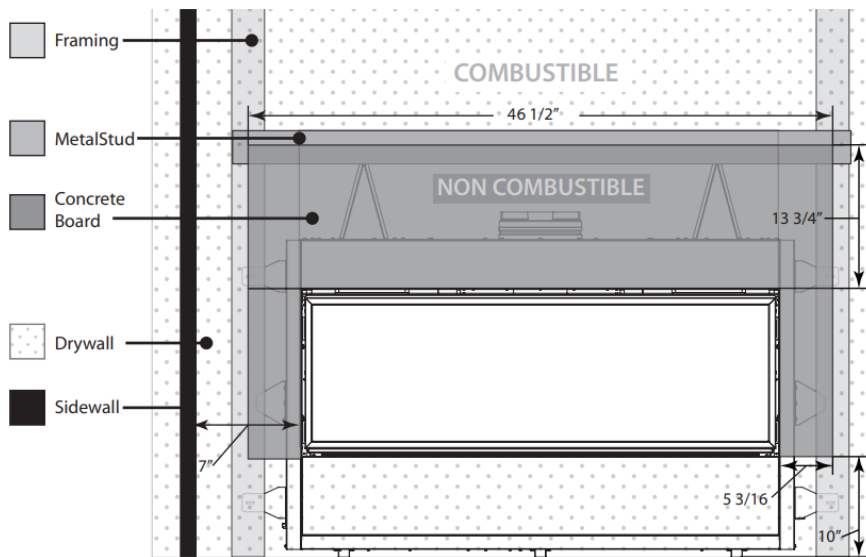


Minimum Venting Requirements

Minimum permitted venting is shown below. The framing height to the center of the thimble is 50". Minimum venting must include a 12" vertical section and a 90 degree elbow which is then terminated horizontally. For a vertical termination please follow the vent pipe manufacturer's installation instructions for vertical vent termination framing. A minimum of 1 in. (25 mm) clearance on all sides of the vertical vent pipe must be maintained. For every 12" of horizontal run there must be a 1/4" of rise. 1" of clearance between framing and venting must be maintained at all times. 2" above the venting and 3" above an elbow.

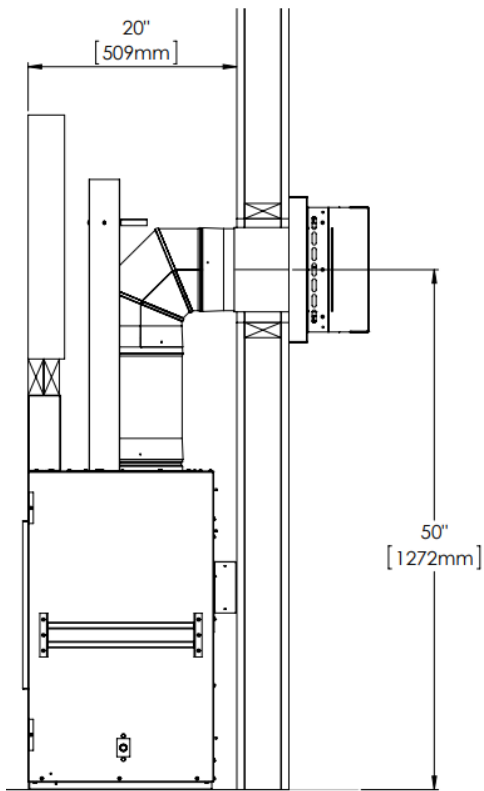


Fireplace Dimensions

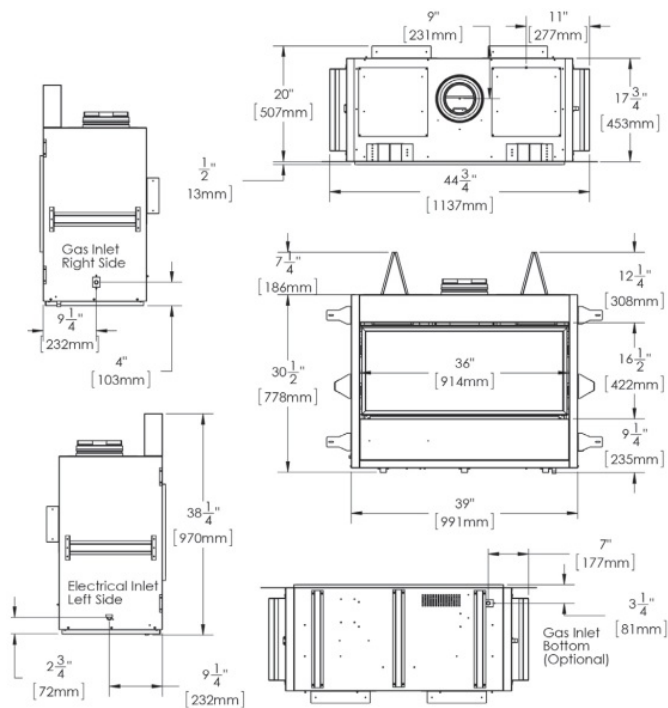

Mantel Projections


Mantel graph dimensions are measured from the bottom of the fireplace, if you wish to reference the mantel height from the tiling edge subtract 15 inches (381mm) from the mantel height depicted on the graph. If you plan to install a TV above your fireplace refer to the appropriate section of the owner's manual for available options.

It is acceptable to install a combustible mantel over top of the noncombustible board. If you are activating the Cool Surface System you are eligible to subtract 12" (305mm) from the mantel height shown in this diagram. See page 6 for more details.

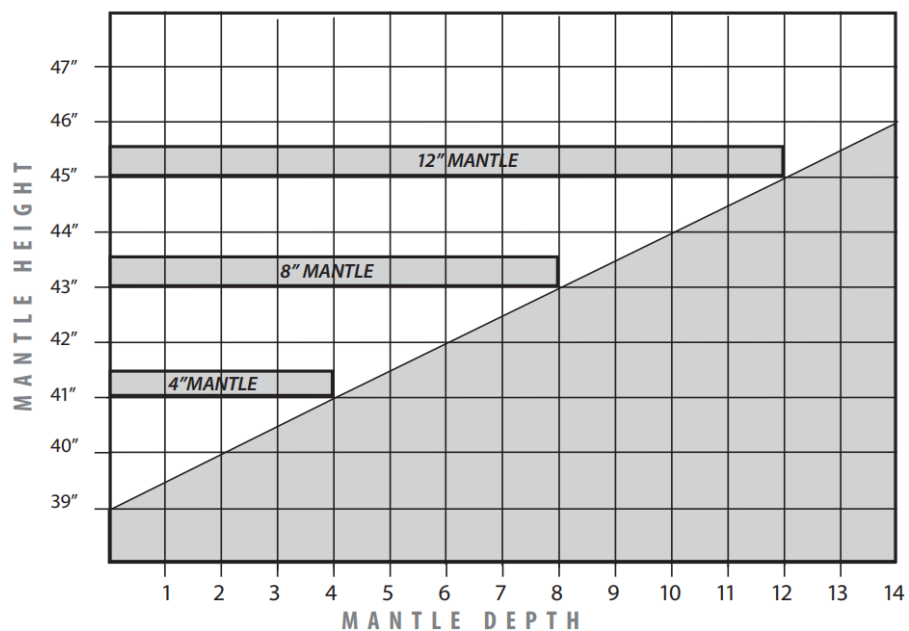


Dimensions


C34 CSS Front Vent – Overall Dimensions

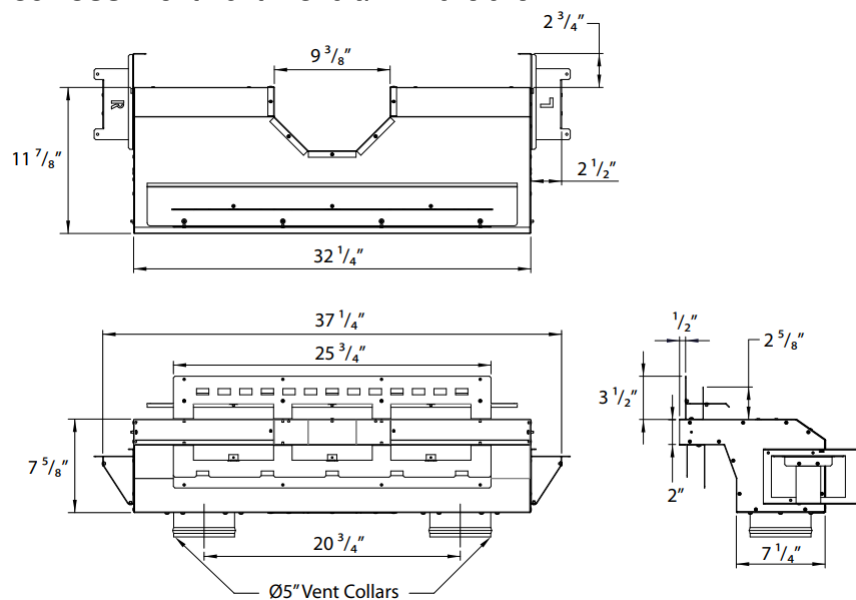

CSS Side Vent – Dimensions

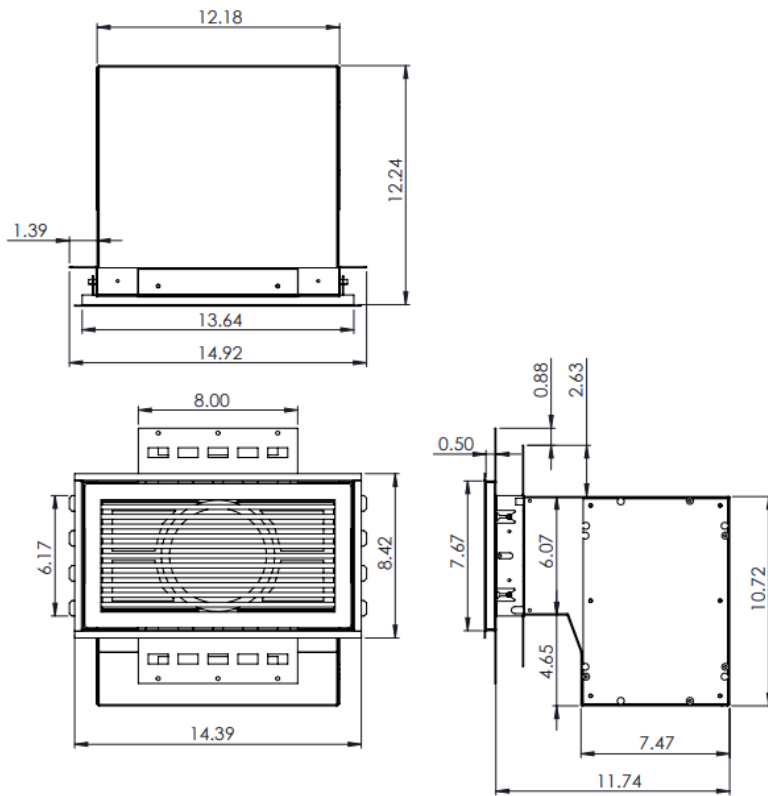


C34 CSS Combustible Facing Kit – Dimensions

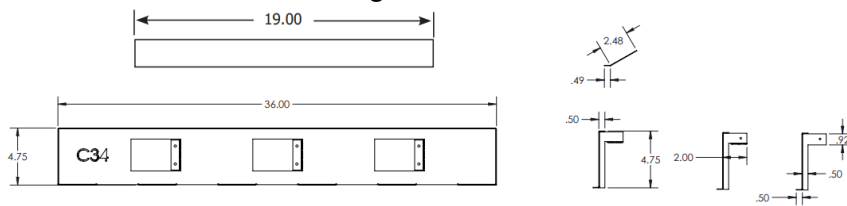

Framing & Rough Opening – Front Vent

CSS Outlet Min. Top and Bottom standoff = 25 / 8" (6.7 cm) *All C Series*

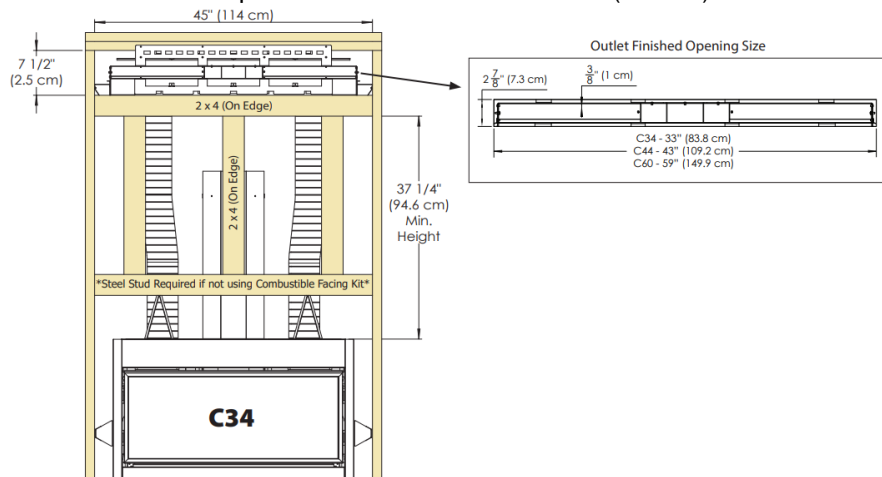


Venting Clearances – Front Vent

Shown here are the minimum framing and clearances for the CSS when the fireplace is installed with the minimum allowable vent length:


Min. Ceiling Clearance from top of CSS outlet = 4" (10.2 cm)

Min. Ceiling Clearance in wall from top of CSS Body = 55 / 8" (14.3 cm) CSS Body Min. Rear standoff = 2 3/4" (69.8 cm)


cm).

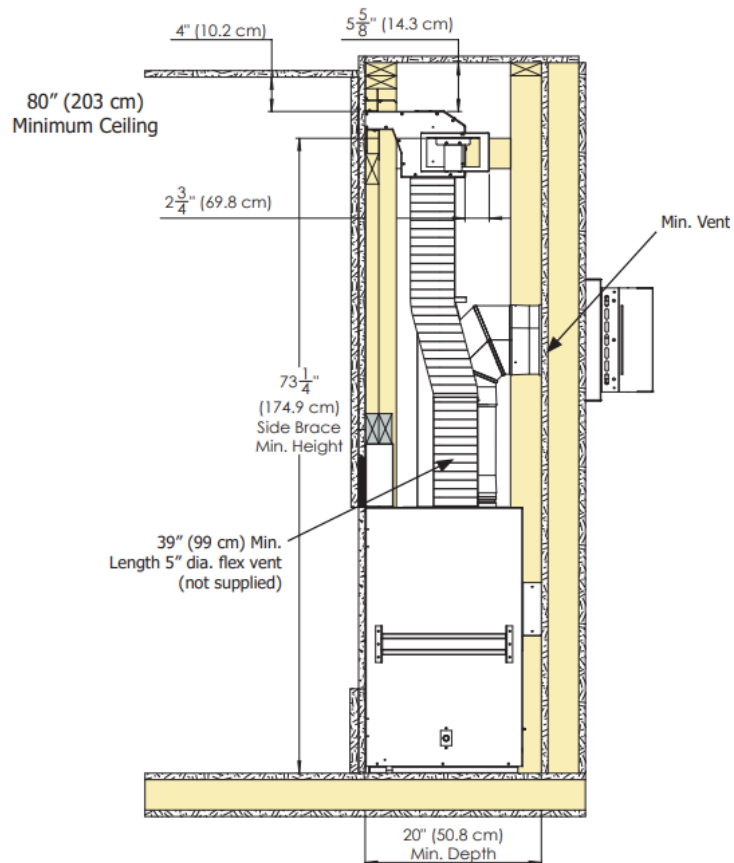

Framing & Clearances – CSS Side Vent

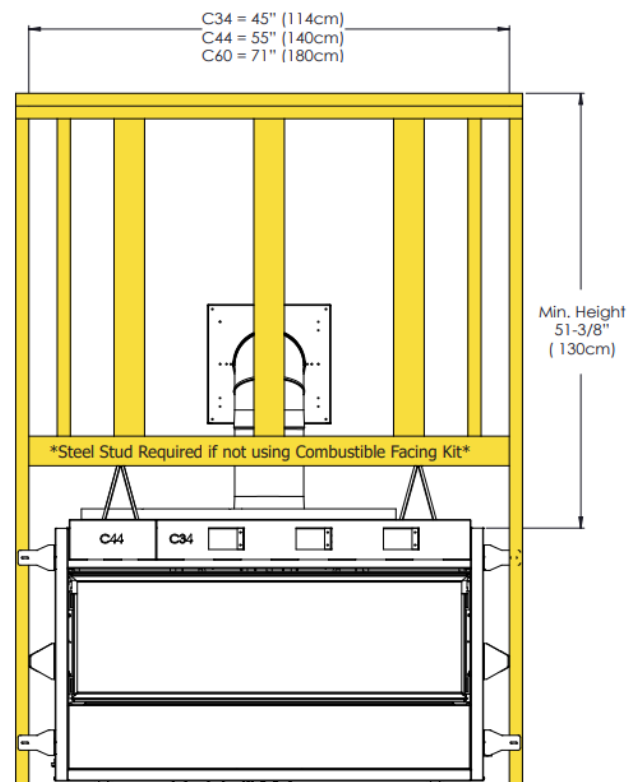


CSS Side Vent (Horizontal Install) – Min. Framing & Clearances

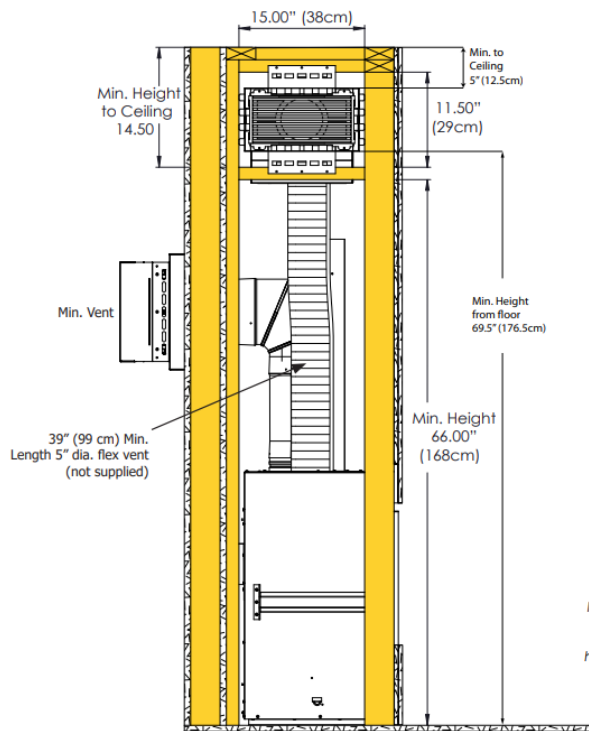


***NOTE:** 15.75" from the header is required for min. ceiling height. Rest unit on lower standoff. There will be a 3/4" (2cm) gap on from the top standoff to the header in this configuration.

Min Framing is 15" x 11.5"


CSS Side Vent (Vertical Install) – Min. Framing & Clearances

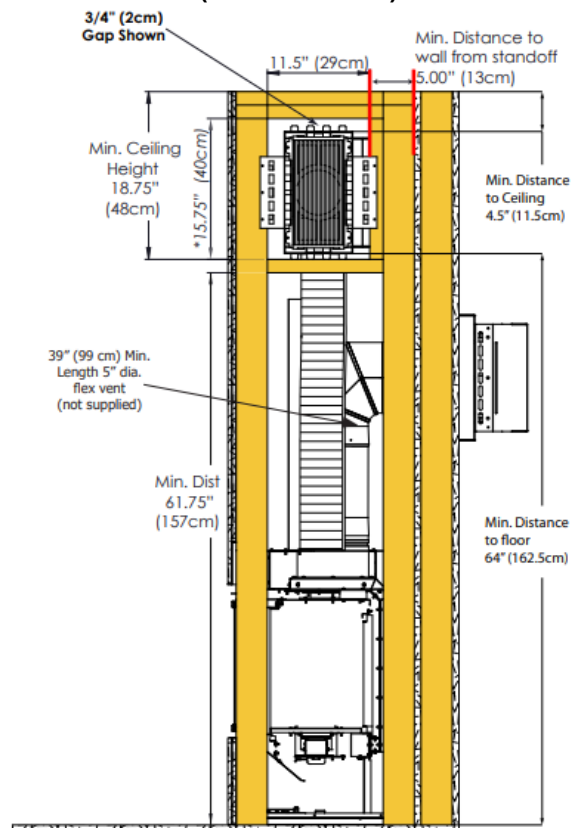

Framing & Revised Mantle Clearances – Front Vent

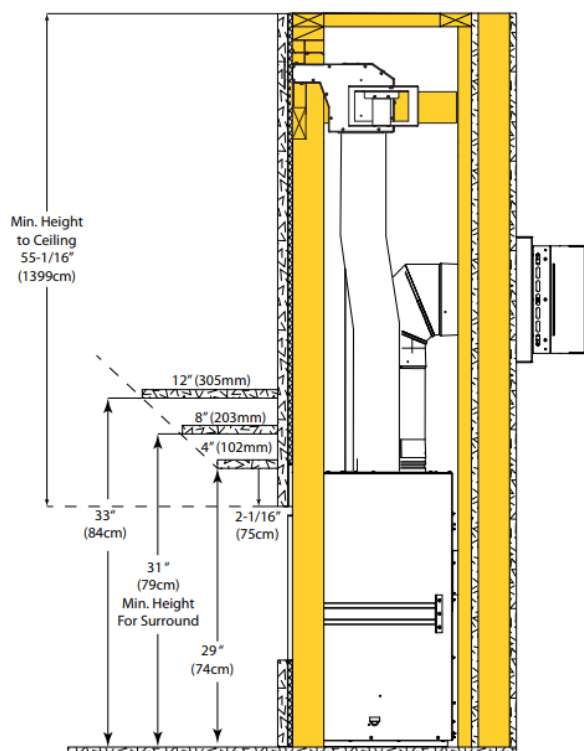

Framing & Revised Mantle Clearances – Side Vent

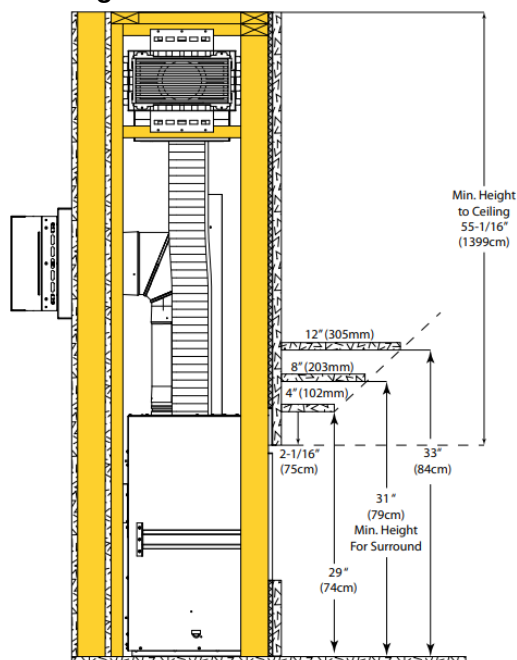


TV Installation Considerations

If you are planning to mount a TV above your fireplace some considerations must be made to ensure it is protected from the heat.


During testing temperatures did not exceed 121°F (49°C) midway up the front wall (see figures on right).

There is no guarantee that these temperatures will not harm the longevity of your TV. Make sure to consult your TV manufacturer's specifications to find the maximum allowable operating temperature. Since every home and installation is unique, temperatures should be verified at the time of install if possible. If desired, front wall temperatures can be lowered to 104°F (40°C) with the use of a mantle (see CSS TV clearances with Mantle figure). See revised mantle clearances chart above. A TV should not be installed if temperatures exceed the manufacturers maximum allowable temperature.

CSS – TV Clearances

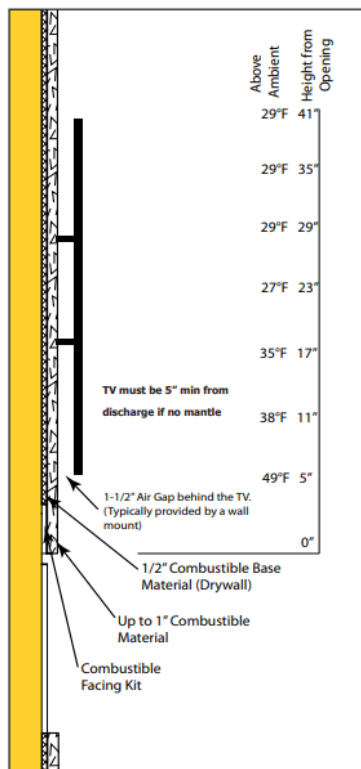

CSS – TV Clearances with Mantle

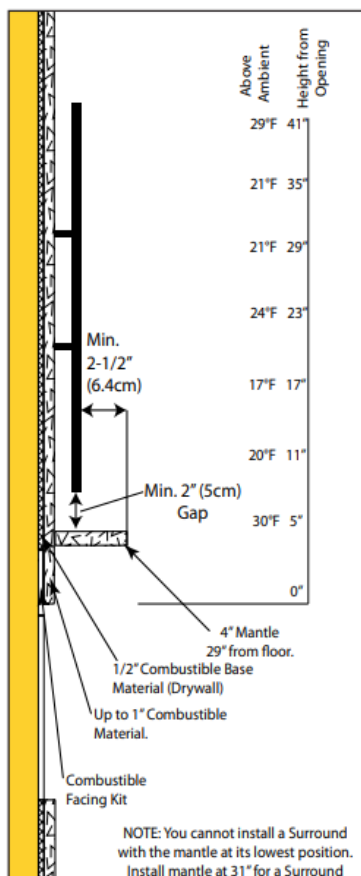

Documents / Resources

	<p>ENVIRO C34 Fireplace [pdf] Installation Guide C34 Fireplace, C34, Fireplace</p>
---	--

References

- [User Manual](#)

Manuals+ Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.