



## Envision LED TSM-9R-EMB-UNV-EMPTY 9 Inch Backup Empty Body for All Models Installation Guide


[Home](#) » [Envision LED](#) » Envision LED TSM-9R-EMB-UNV-EMPTY 9 Inch Backup Empty Body for All Models Installation Guide 



### Contents

- [1 TSM-9R-EMB-UNV-EMPTY 9 Inch Backup Empty Body for All Models](#)
- [2 SAFETY RECOMMENDATIONS](#)
- [3 Documents / Resources](#)
  - [3.1 References](#)

### TSM-9R-EMB-UNV-EMPTY 9 Inch Backup Empty Body for All Models

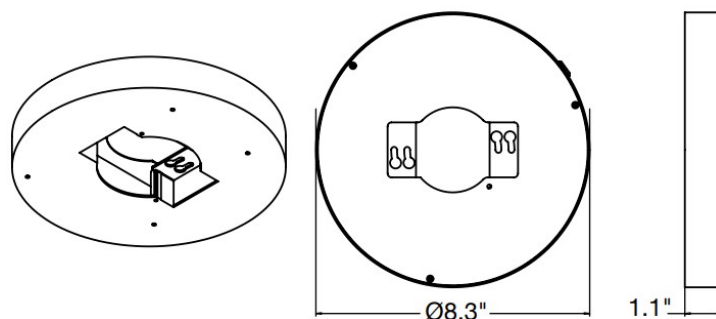

\*Wiring supplies are required by the Canadian Electrical Code and/or the Quebec electrical code.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PEOPLE

READ ALL INSTRUCTIONS

IMPORTANT SAFETY

INSTRUCTIONS

SAVE THESE INSTRUCTIONS

**TOOLS & MATERIALS REQUIRED**




## SAFETY RECOMMENDATIONS

1. The lighting shall be mounted at a height of maximum 4.0m
2. Do not use outdoors
3. Do not mount near gas or electric heaters. Do not let power supply cords touch hot surfaces.
4. Use caution when changing batteries – **TURN ALL POWER OFF, BOTH WALL SWITCH AND MAIN POWER!**  
Use only designated battery as supplied with original unit or as listed for use with this product. Dispose of old battery in designated disposal location.
5. Equipment should be mounted in locations and at heights where it will not be subject to tampering by unauthorized personnel.
6. This product is designed for use with the 9" round series lighting. Must be used with any other fixture.
7. Do not use this product for other than intended use.


All service should be performed by professional personnel.


SAVE THESE INSTRUCTIONS.

## OPTION #1: SLIM SURFACE LIGHT

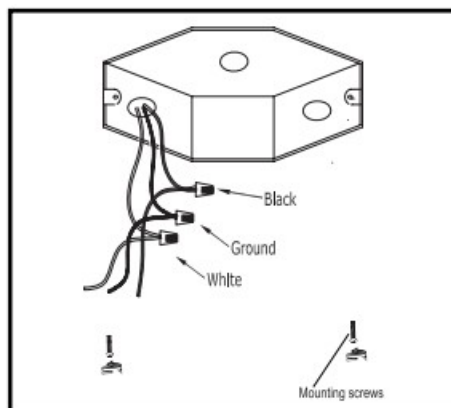


1. Turn OFF/disconnect power at circuit breaker. Typical junction box wiring has only white and black switched wires controlled by wall switch for ON/OFF or dimming. Ensure the junction box has an additional set of unswitched wires (continuous) main power wires as shown.

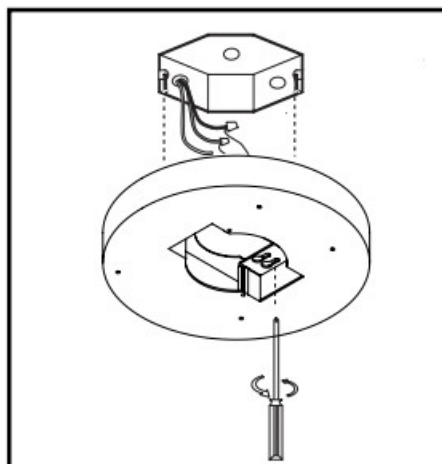


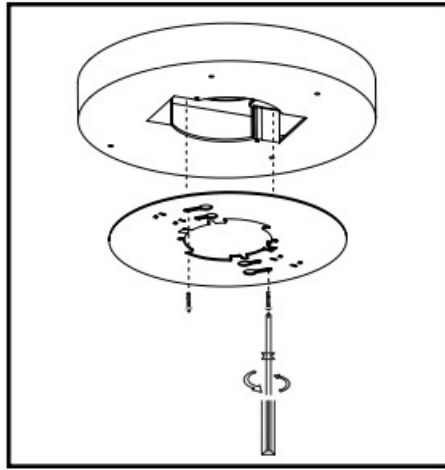

2. Screw the emergency backup unit up into the junction box using the screws provided. Then using the wire unit provided, connect the three cables available for connection into the junction box.
  - a. Connect the “switched line” to the black switched power cable coming from the junction box.
  - b. Connect the “continuous main power” from the battery backup box to the continuous main black wire from the junction box.
  - c. Connect the “neutral” white wire from the battery backup together with the other two neutral wires coming.

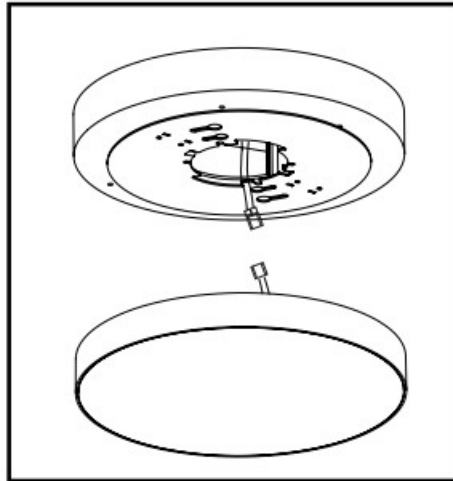


3. Make electrical connections from the blink LED lighting fixture with the battery backup.
  - a. Use the orange connector already supplied and affixed to the unit.
  - b. Be sure to connect the ground wire coming from the lighting fixture.

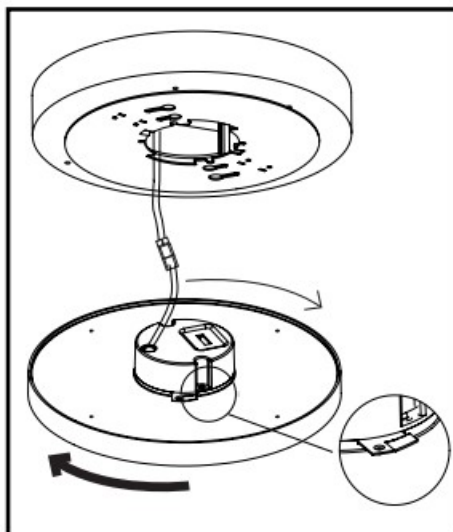

4. Pop and lock into place.
  - a. Feed all wires up into the battery backup box.
  - b. Complete installation by pushing the fixture into the mounting plate.



## Documents / Resources



[Envision LED TSM-9R-EMB-UNV-EMPTY 9 Inch Backup Empty Body for All Models](#) [pdf] | Installation Guide  
TSM-9R-EMB-UNV-EMPTY 9 Inch Backup Empty Body for All Models, TSM-9R-EMB-UNV-EMPTY, 9 Inch Backup Empty Body for All Models, Empty Body for All Models, Body for All Models, All Models, Models

## References

- [LED Envision Led - Envision LED Lighting](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.