

Fosmon C-10825FCUS

Fosmon Minutes Countdown Plug-in Timer Outlet Instruction Manual

Model: C-10825FCUS | Brand: Fosmon

INTRODUCTION

The Fosmon Minutes Countdown Plug-in Timer Outlet provides precise control over your electrical appliances and lights. Designed for indoor use, this ETL-certified timer offers customizable countdown durations from 1 minute to 63 minutes, along with a convenient daily repeat function and multiple safety features. It is ideal for managing power to various devices, enhancing both convenience and energy efficiency in your home.

PRODUCT OVERVIEW

The Fosmon Countdown Timer features a compact design with intuitive controls. It includes six time-setting buttons, an On/Off button, and a Repeat button, along with two grounded outlets.



Image: Two Fosmon Minutes Countdown Plug-in Timer Outlets, showing the front panel with minute buttons and control buttons.

Small but Powerful

Compact design maximizes your space
with a load up to 15A/1875W

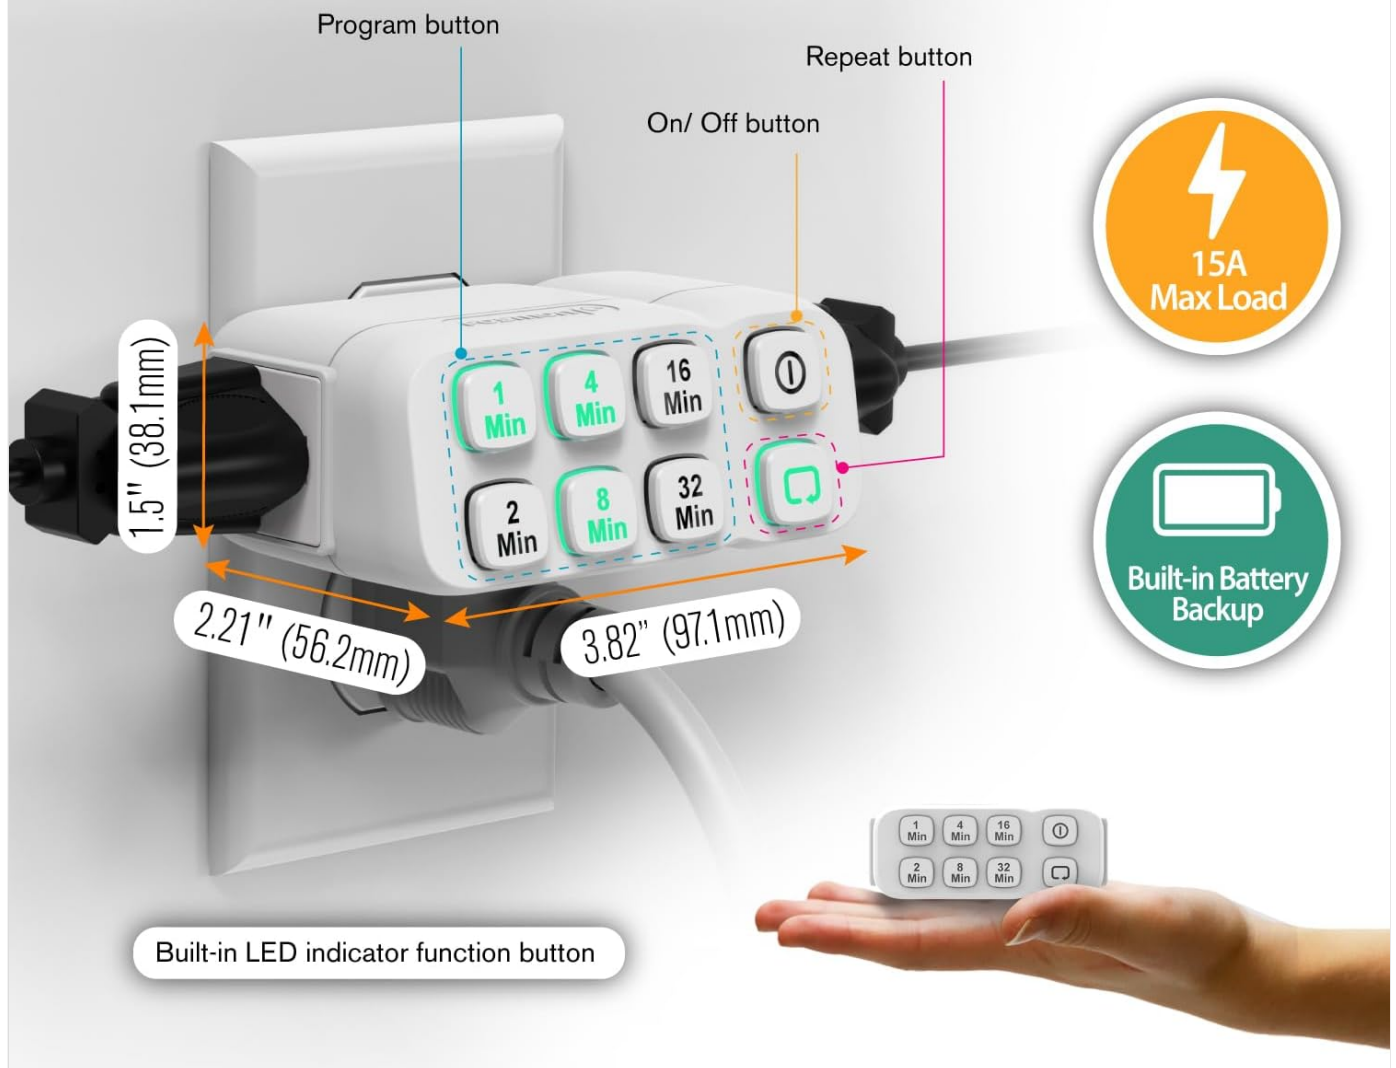


Image: A single Fosmon timer plugged into a wall outlet, with dimensions (3.82"D x 2.21"W x 1.5"H) and key features like 15A Max Load and Built-in Battery Backup highlighted.

Components:

- **Time Buttons:** 1 Min, 2 Min, 4 Min, 8 Min, 16 Min, 32 Min. These buttons are used to set the desired countdown duration.
- **On/Off Button:** Manually turns the connected device on or off instantly.
- **Repeat Button:** Activates the daily repeat function for the set countdown program.
- **Grounded Outlets:** Two outlets for connecting appliances.

SETUP

1. **Plug In the Timer:** Insert the Fosmon Countdown Timer into a standard 125V AC 60Hz wall outlet.
2. **Connect Your Device:** Plug the appliance or light you wish to control into one of the grounded outlets on the timer.

Support Short Countdown Time

Set the desired countdown duration
from 1 minute to 63 minutes



Image: The Fosmon timer plugged into a wall, demonstrating its use with a curling iron, diffuser, and kettle, highlighting its short countdown capabilities.

Initial Power-Up:

Upon plugging in, the timer is ready for use. The built-in battery backup ensures that your settings are retained even during power outages.

OPERATING INSTRUCTIONS

Setting a Countdown Program:

To set a specific countdown duration (from 1 to 63 minutes), press the desired minute buttons. You can combine multiple buttons to achieve the exact time. For example, to set a 20-minute countdown, press the 16-Min button and then the 4-Min button within 2 seconds.



Image: Visual guide showing how to combine minute buttons (e.g., $1+2=3$ mins, $32+4+1=37$ mins, $32+16+8+4+2+1=63$ mins) to set various countdown durations.

Once the program is confirmed (indicated by the illuminated buttons), the timer will turn on the connected device for the set duration and then automatically turn it off.

Manual On/Off:

Press the **On/Off** button to instantly turn the connected device on or off, bypassing any set countdown program.

Daily Repeat Function:

To have the timer repeat the same countdown program daily, set your desired countdown duration, then press the **Repeat** button. The timer will activate the program at the same time every 24 hours.

User Friendly

Easy to program
No more complicated setup & hassle free



Image: The Fosmon timer plugged into a wall, with icons illustrating features like Built-in Battery Backup, Daily Repeat, 63 Countdown Program, Auto & Manual modes, and Sleep Friendly operation.

This feature is particularly useful for lights to deter break-ins or for daily routines like charging devices for a specific period.

Your browser does not support the video tag.

Video: A setup guide for the Fosmon 63 Minute Plug-In Countdown Timer, demonstrating how to program and use its features, including the daily repeat function. This video is provided by the seller, SF Planet.

Your browser does not support the video tag.

Video: A short preview of the setup guide for the Fosmon 63 Minute Plug-In Countdown Timer, demonstrating basic programming. This video is provided by the seller, SF Planet.

Applications:

The timer is versatile and can be used for various indoor applications:

Multiple Uses

Compatible with incandescent, CFL, and LED lights, as well as various appliances and holiday decorations.



Submersible Pump



Kettle



Electric Griddle



Christmas Tree

Image: The Fosmon timer shown with examples of its diverse applications, including a submersible pump, kettle, electric griddle, and Christmas tree lights.

- Lights (incandescent, CFL, LED)
- Fans
- Coffee Makers
- Small Pumps
- Kettles
- Griddles
- Hair Straighteners
- Holiday Decorations

MAINTENANCE

- **Cleaning:** Disconnect the timer from the power outlet before cleaning. Wipe with a dry, soft cloth. Do not use liquid cleaners or abrasive materials.

- **Storage:** Store in a cool, dry place away from direct sunlight and moisture when not in use for extended periods.

TROUBLESHOOTING

Timer Not Responding:

- Ensure the timer is fully inserted into a working wall outlet.
- Check if the connected appliance is working by plugging it directly into a wall outlet.
- The internal battery backup may need to be reset if the timer behaves unexpectedly after a long period of no power. Unplug and replug the timer.

Countdown Not Activating/Repeating:

- Ensure you are pressing the minute buttons within 2 seconds of each other to combine times.
- For daily repeat, ensure the Repeat button was pressed after setting the desired countdown.

SPECIFICATIONS

Feature	Detail
Power	125VAC 60Hz
Max. Load (Resistive)	15A 1875W
Max. Load (Tungsten)	10A 1250W
Motor Load	1/2 HP
TV Rating	TV-5
Battery Backup	NiMH 2.4V (> 100 Hours)
Operating Temperature	32°F to 104°F (0°C to 40°C)
Case Material	Fire-Resistant V-0
Product Dimensions	3.82"D x 2.21"W x 1.5"H
Color	White

Warranty & Support

Fosmon products come with a Limited Lifetime Warranty. For product registration, warranty details, and customer support, please visit the official Fosmon website: www.fosmon.com.