

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [OOSSXX](#) /

› [OOSSXX 5.0MP AHD Dome Wired Security Camera System \(4Cams-1TB\) User Manual](#)

## OOSSXX 5.0MP Definition Full HD

# OOSSXX 5.0MP AHD Dome Wired Security Camera System (4Cams-1TB) User Manual

Model: 5.0MP Definition Full HD

## INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your OOSSXX 5.0MP AHD Dome Wired Security Camera System. This system is designed to provide high-definition video surveillance for both indoor and outdoor environments, ensuring comprehensive security coverage.

## PACKING LIST

Please verify that all items listed below are included in your package. If any items are missing or damaged, please contact customer support.

- 1 x 8-Channel 5.0MP DVR (Pre-installed 1TB Hard Drive)
- 4 x Wired HD-Analog 5.0MP Dome Camera
- 4 x 60ft 2-in-1 Cable for Camera
- 1 x DC12V2A Power Supply for Camera
- 1 x Remote Control
- 1 x USB Mouse
- 1 x HDMI Cable
- 1 x 1m LAN Cable
- 1 x Separation Power Cord 1-to-4
- 1 x Manual
- Several Security Stickers
- Screw Kits for installation

Your browser does not support the video tag.

**Video:** Unboxing and Packing List for the Wired Dome Camera System. This video demonstrates the contents of the package, including the DVR, cameras, cables, and accessories.

## PRODUCT FEATURES

- **122° Ultra Wide-Angle Lens:** Equipped with an optical wide-angle lens, providing approximately 122° wide viewing angle to reduce surveillance dead zones.
- **5.0MP Full HD Definition:** The 5.0 Megapixel (2592 x 1944) high-definition security camera ensures clear video for 24/7 monitoring.
- **IP67 Waterproof Weather Resistance:** Designed to withstand harsh weather conditions, the durable IP67-rated housing allows for reliable indoor and outdoor use in temperatures from -40°C/-40°F to 60°C/140°F.
- **Super Night Vision:** Features a high-resolution 5MP sensor and an IR cut filter, delivering clear visuals day and night with an 80ft night vision range.
- **Free App Remote Access:** Download the "Honestview" app for remote video access, live viewing, and playback on your smartphone, tablet, or PC without monthly fees.



**Image:** Comparison of 122° Ultra Wide-Angle view versus a standard 75° angle, demonstrating broader coverage.



Warehouse



Home




Farm



Store

**Image:** OOSSXX dome camera with IP67 waterproof rating, shown installed outdoors during rainfall, highlighting its weather resistance.

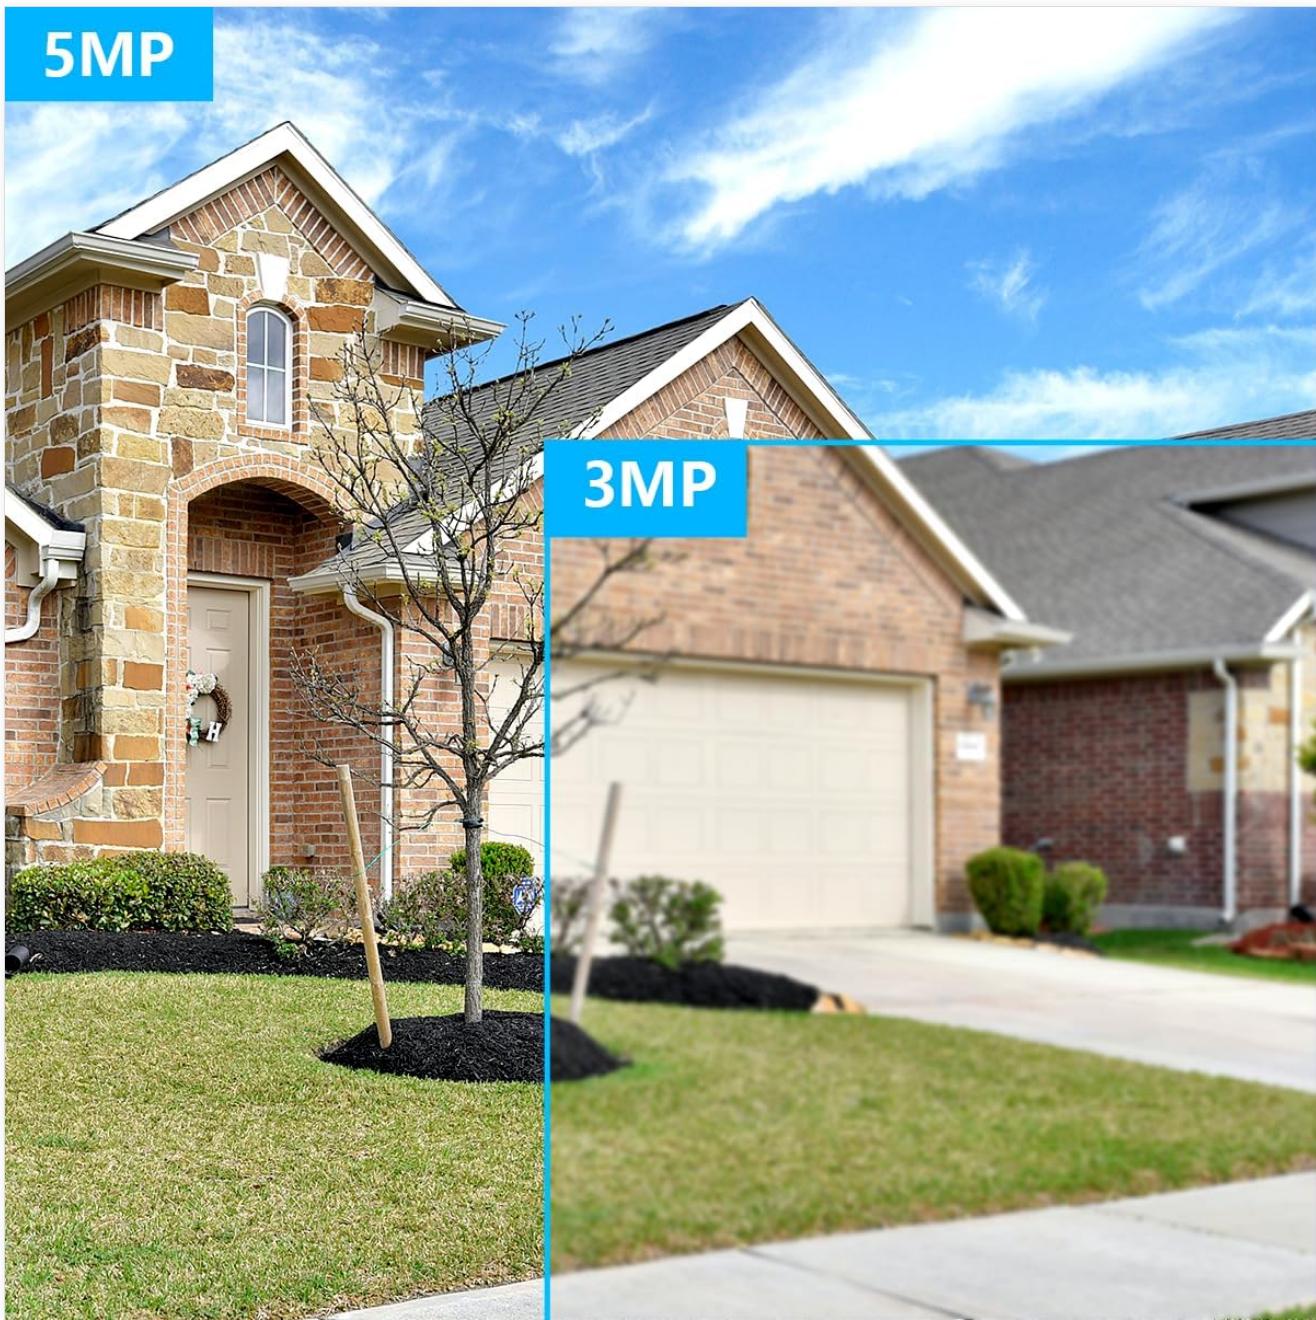

**Image:** Visual comparison illustrating the superior clarity of a 5MP camera resolution compared to a 3MP resolution.

## SETUP AND INSTALLATION

---

### 1. Physical Connection

Follow these steps to physically connect your security camera system components:

1. Connect the cameras to the DVR using the provided 60ft 2-in-1 cables.
2. Connect the DVR to a monitor (HDMI or VGA) for local viewing.
3. Connect the DVR to your router using the LAN cable for network access and remote viewing.
4. Connect the USB mouse to the DVR for navigation.
5. Power on the DVR and cameras using their respective power adapters.

Your browser does not support the video tag.

**Video:** Guide on how to connect AHD cameras to the DVR. This video illustrates the physical wiring process for the security camera system.



**Image:** Connection diagram for the HD-AHD-Analog Security Camera System, detailing how to connect the NVR, cameras, monitor, router, and power.


## 2. App Installation and Setup

To enable remote viewing and control, install the "Honestview" app on your smartphone or tablet:

1. Download the "Honestview" app from your device's app store (available on Google Play and Apple App Store).
2. Open the app and tap the "+" icon to add a new device.
3. Select "Scan to add" and scan the QR code located on the DVR or displayed on your connected monitor.
4. Follow the on-screen prompts to complete the network setup and name your device.
5. Once connected, tap the play button to start live viewing.

Your browser does not support the video tag.

**Video:** Setup guide for the 5MP AHD Dome Wired Cameras, demonstrating app installation and initial configuration steps.

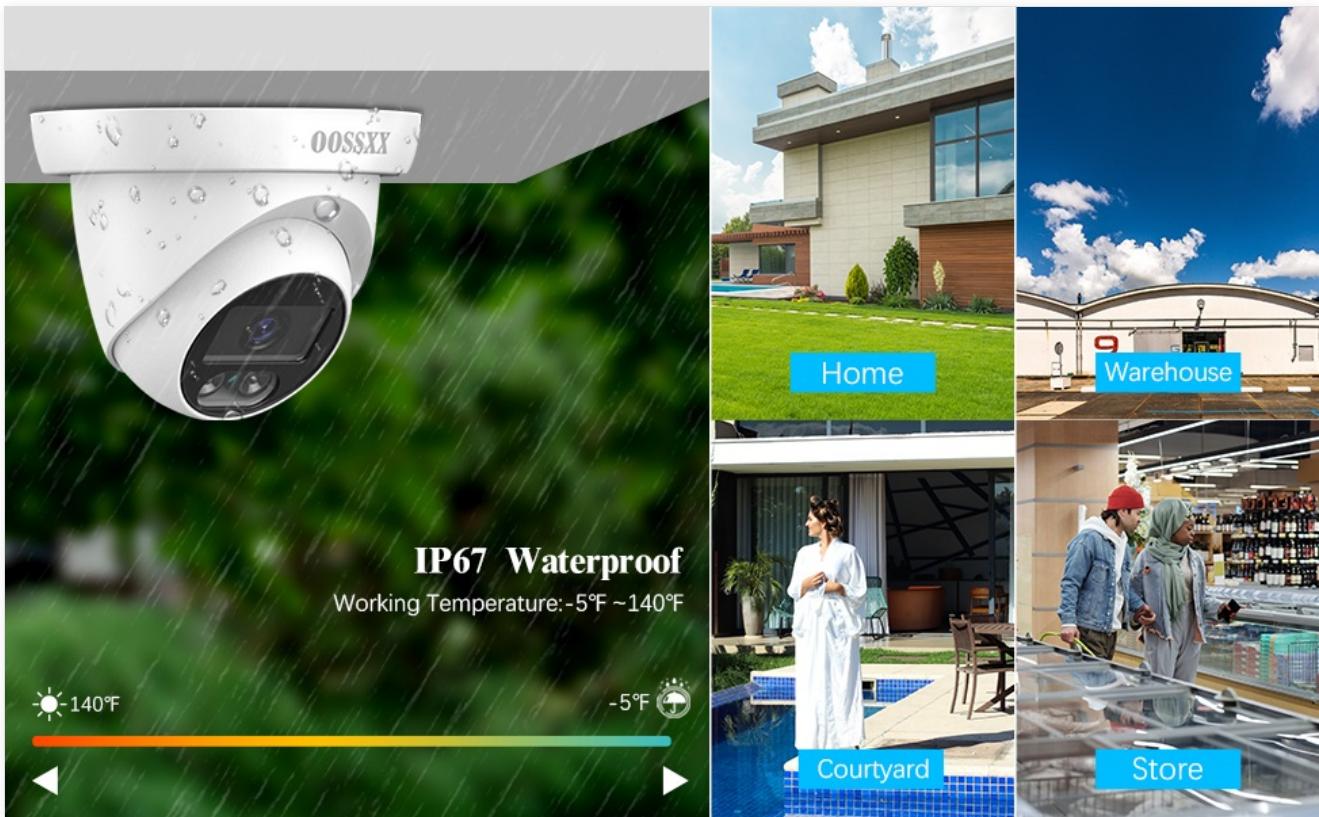

**Image:** Step-by-step guide on connecting the security camera system to the Honestview mobile application for remote access.

## OPERATION

---

### Live View

After successful setup, you can view live footage from your cameras:

- **Local Monitor:** Use the connected monitor and USB mouse to navigate the DVR interface and view all camera feeds.
- **Mobile App:** Open the "Honestview" app on your smartphone or tablet. Select your device to see live streams. You can switch between single and multi-camera views.
- **PC Client:** Access live video feeds from a Windows or Mac PC using the provided client software or web interface.

### Recording and Playback

The system supports continuous, scheduled, and event-triggered recording to the pre-installed 1TB hard drive.

- **Playback:** Use the DVR interface or the "Honestview" app to access recorded footage. You can search by date, time, or event.
- **Motion Detection:** The system can detect motion and trigger recordings or send alerts to your mobile app. Configure motion detection zones and sensitivity settings via the DVR interface or app.

# 122° Wide View Angle




**OOSSXX 122° Version**



**Other Normal 75° Version**

**Image:** DVR connected to a television, showing a multi-camera live view, with a remote control for system operation.

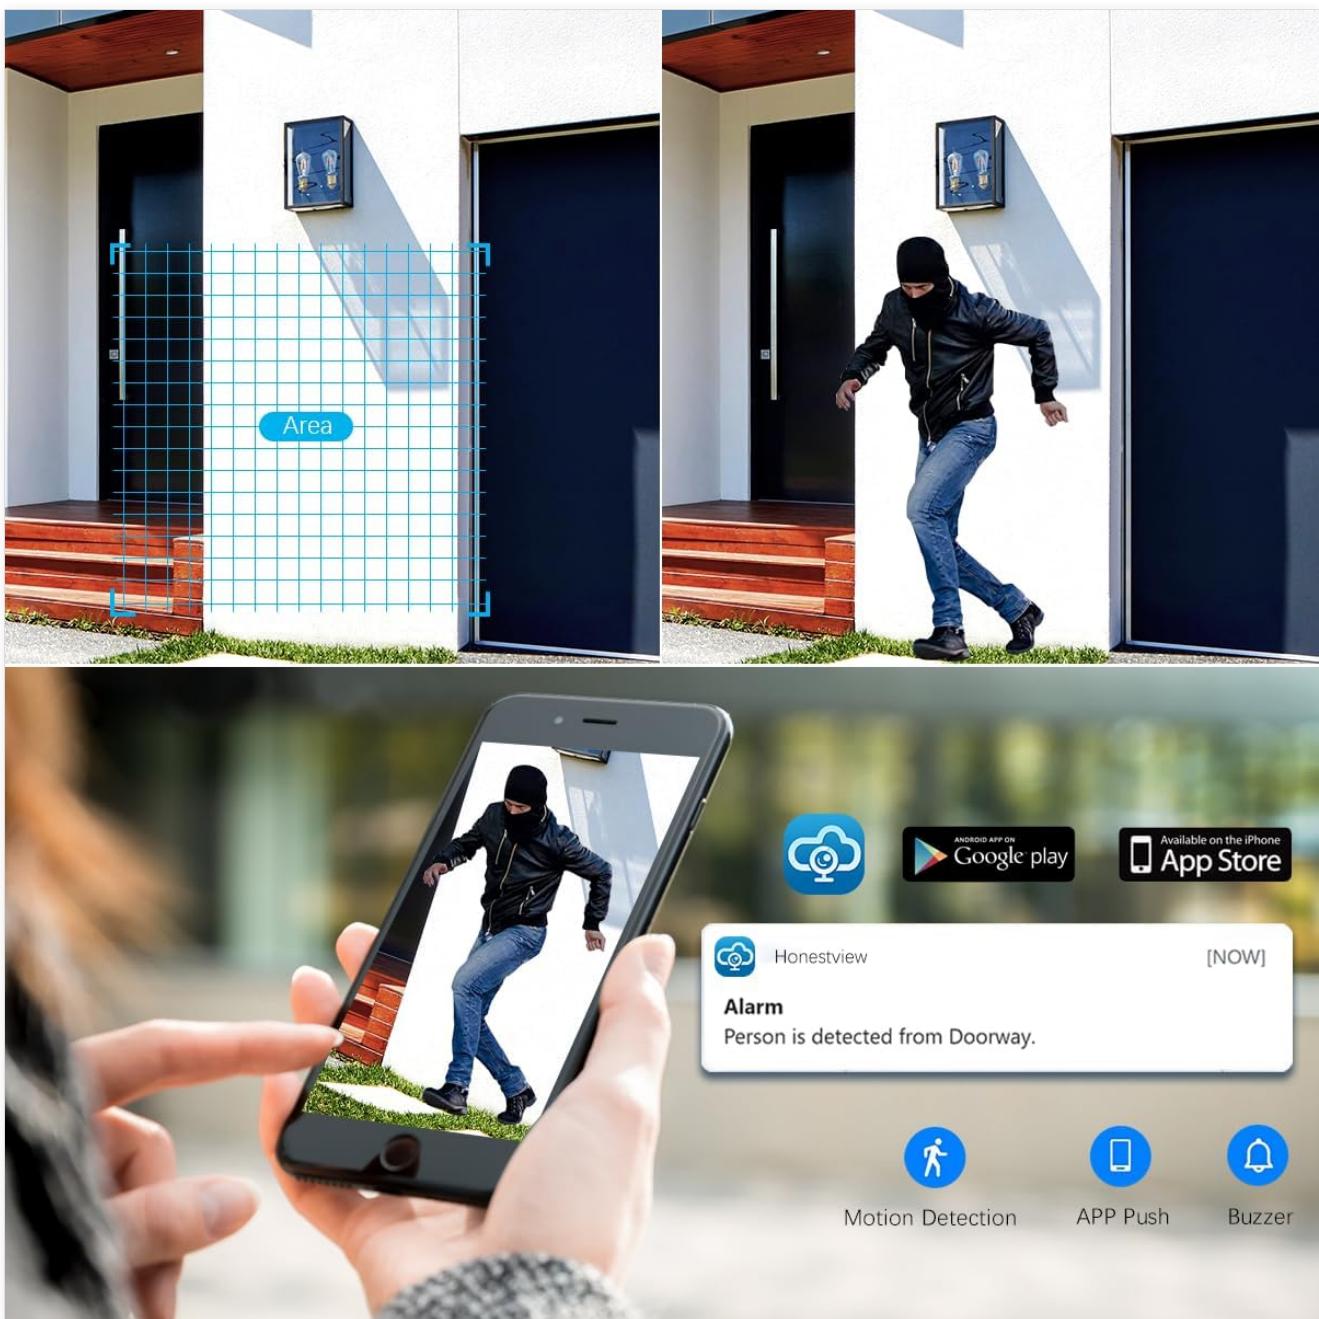

**Image:** A smartphone displaying a motion detection alert from the Honestview app, indicating a person detected at a doorway.

## MAINTENANCE

- **Regular Cleaning:** Periodically clean the camera lenses with a soft, damp cloth to ensure clear image quality. Avoid abrasive cleaners.
- **Cable Inspection:** Check all cables and connections regularly for any signs of wear, damage, or loose connections, especially for outdoor installations.
- **Software Updates:** Keep your DVR firmware and mobile app updated to the latest versions for optimal performance and security.
- **Hard Drive Management:** The 1TB hard drive will automatically overwrite older footage when full. If you need to retain specific recordings, back them up to an external storage device.

## TROUBLESHOOTING

- **No Video Signal:**

- Ensure all cameras and the DVR are powered on.
- Check all video cables (BNC connectors) for secure connections.
- Verify the monitor input source is correctly selected (HDMI/VGA).

- **Poor Image Quality:**

- Clean camera lenses.
- Ensure cameras are within their effective range and not obstructed.
- Check cable integrity; damaged cables can degrade signal quality.

- **Remote Access Issues:**

- Ensure the DVR is connected to the internet via the LAN cable.
- Verify your router is functioning correctly and has an active internet connection.
- Check if the "Honestview" app is updated to the latest version.
- Re-scan the QR code in the app if the device is offline.

- **No Recording:**

- Check the DVR's recording schedule and settings.
- Ensure the hard drive is properly installed and recognized by the DVR.
- Verify that the hard drive is not full (though it should auto-overwrite).

## SPECIFICATIONS

---

| Feature                  | Detail  |
|--------------------------|---|
| Brand                    | OOSSXX  |
| Model Number             | 5.0MP Definition Full HD  |
| Connectivity Technology  | HD-Analog, Wired  |
| Video Capture Resolution | 1944p, 2.7K / 5.0 Megapixel   |
| Special Features         | 122° Ultra Wide-Angle, Free App No Month Fee, IP67 Waterproof, Outdoor & Indoor, Plug and Play Wired System |
| Number of Channels       | 8 (DVR)   |
| Memory Storage Capacity  | 1 TB (Pre-installed)  |
| Power Source             | Corded Electric   |
| Operating System         | Linux   |
| Recommended Uses         | Indoor, Outdoor   |
| Compatible Devices       | Cameras, Laptops, Personal Computers, Smartphones, TV   |

| Feature              | Detail             |
|----------------------|--------------------|
| Low Light Technology | Night Vision       |
| Night Vision Range   | 80 Feet            |
| Frame Rate           | Up to 15fps        |
| Recording Mode       | Event, Schedule    |
| Total USB Ports      | 2                  |
| Hardware Interface   | HDMI, USB, VGA     |
| Lens Type            | Wide Angle         |
| Viewing Angle        | 122 Degrees        |
| Product Dimensions   | 11 x 13 x 7 inches |
| Item Weight          | 9.73 pounds        |

## WARRANTY AND SUPPORT

---

OOSSXX provides the following support for your security camera system:

- **1-Year Warranty:** Your product is covered by a 1-year warranty from the date of purchase.
- **Lifetime Technical Support:** OOSSXX offers lifetime technical support to assist with any product-related inquiries or issues.
- **24/7 Online Support:** Access 24/7 online support for one-on-one assistance.