


ETE FlexLite DW FlexLite Hook Up Wire



ETE FlexLite DW FlexLite Hook Up Wire User Guide

[Home](#) » [ETE](#) » ETE FlexLite DW FlexLite Hook Up Wire User Guide 

Contents

- [1 ETE FlexLite DW FlexLite Hook Up Wire](#)
- [2 Selection Guide](#)
- [3 FlexLite/UL Style Cross-Reference](#)
- [4 Part Numbering System](#)
- [5 Contact](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)



ETE FlexLite DW FlexLite Hook Up Wire



Available in:

- Americas ■
- Europe ■
- Asia Pacific

Selection Guide


Application	Temperature Rating (°C/°F)	Features and Benefits	Product Name
Intermittent-duty motors and heating elements	-45°C to 125°C -49°F to 257°F	■ Insulation that does not melt and flow at high temperatures ■ Excellent chemical resistance ■ VW-1	FlexLite DW
Electronics, appliance, and motor applications	-55°C to 135°C -67°F to 275°F	■ Small size, light weight ■ No plasticizers or corrosive outgassing ■ Excellent shop handling	FlexLite TW
General purpose commercial and industrial	150°C	■ Excellent chemical resistance ■ Non-melting insulation	FlexLite CW
Lighting, motor applications	-55°C to 200°C -67°F to 392°F	■ Insulation does not melt and flow at high temperature ■ VW-1 ■ Excellent shop handling ■ No cold-flow problems	FlexLite HT
Lighting, appliances, motors	-65°C to 250°C -85°F to 482°F	■ Very high temperature ■ VW-1 ■ Superb chemical resistance ■ Excellent shop handling	FlexLite TX

FlexLite/UL Style Cross-Reference

UL Marking and Labeling All FlexLite products are UL labeled and reel marked. UL surface marking is additional. Please contact TE for further information

Product	UL Style	Temperature Rating	Voltage Rating	AWG Range	Part Description
FlexLite DW*	3584	125°C [257°F]	600 volts	14-26	FLDWX031X
FlexLite TW	10208	135°C [275°F]	600 volts	10-28	FLTWX031X
FlexLite CW	10916	150°C [302°F]	600 volts	0.35mm ² =2.50mm ²	FLCW0219& 0211
FlexLite HT*	3557	200°C [392°F]	600 volts	12-26	FLHTX031X
FlexLite TX	10297	250°C [482°F]	600 volts	10-26	FLTX031X

Part Numbering System

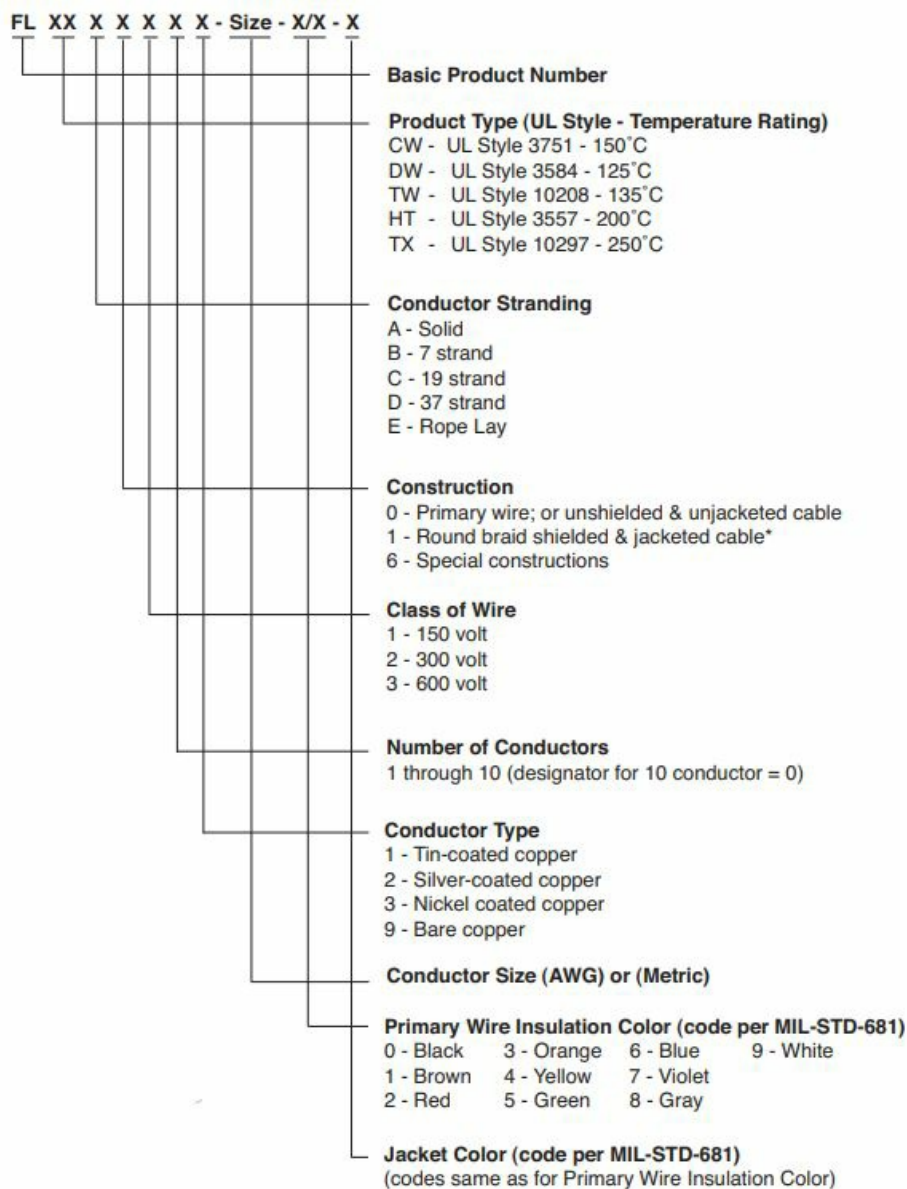

Part Numbering System is a cross reference only and not meant for part creation.

Shield coating same as conductor coating

- Typical ordering example 19 strand, 20 AWG tin-coated copper, two components, shielded and jacketed cable, 600 volt, blue and white components, white jacket; part number FLDWC1321-20-6/9-9.
- Ordering information For products requiring CUR (Canadian UL) or CSA marking part numbering descriptions above MIGHT NOT apply.

- www.te.com

Dimensions are shown for reference purposes only. Specifications are subject to change.

Contact

Dimensions are in millimetres unless otherwise specified. USA: +1 (800) 522-6752

- Canada: +1 (905) 475-6222
- Mexico/C. Am.: +52 (0) 55-1106-0800
- Latin/S. Am.: +54 (0) 11-4733-2200
- Germany: +49 (0) 6251-133-1999
- UK: +44 (0) 800-267666
- France: +33 (0) 1-3420-8686
- Netherlands: +31 (0) 73-6246-999
- China: +86 (0) 400-820-6015

Arrow.com

Documents / Resources



[ETE FlexLite DW FlexLite Hook Up Wire](#) [pdf] User Guide
FlexLite DW FlexLite Hook Up Wire, FlexLite DW, FlexLite Hook Up Wire, Hook Up Wire, Up Wire, Wire

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.