Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

siaviala P5

siaviala 15.6-inch Dual Portable Monitor Extender P5 User Manual

Introduction

Thank you for choosing the siaviala 15.6-inch Dual Portable Monitor Extender. This device is designed to enhance your productivity by providing an additional display for your laptop. Please read this manual carefully to ensure proper setup, operation, and maintenance.

Product Overview

The siaviala P5 is a 15.6-inch Full HD (1920x1080) IPS portable monitor extender, offering a vibrant display with 300cd/m² brightness and 85% NTSC color gamut. Its detachable design and multiple display modes make it a versatile tool for various applications, from business meetings to gaming. It is compatible with laptops ranging from 13 to 17.3 inches.



Image: The siaviala 15.6-inch Dual Portable Monitor Extender, showcasing its sleek design and integration with a laptop.

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2013 with regard to energy labelling of electronic displays

	Parameter	Parameter or value and precision	Unit
1.	Supplier's name or trademark.	siaviala	
	Supplier's address.	ENIFPEGASUSSRL, MIHAI, Bloc 42, Scara 1, Etaj 5, Apartament 29, 22882 Bucuresti Sectorul 2, Romania	
2.	Model identifier	siaviala-P5	
3.	Energy Efficiency Class for Standard Dynamic Range (SDR)	A	
4.	On mode power demand in SDR	6,9	W
5.	Energy Efficiency Class for High Dynamic Range (HDR)	A	
6.	On mode power demand in HDR, if implemented	10,6	W
7.	Off mode, power demand, if applicable	0,2	W
8.	Standby mode power demand, if applicable	0,3	W

9.	Networked standby mode power demand, if applicable			0,0	W
10.	Electronic display category			Monitor	
11.	Size ratio	16	:	9	
12.	Screen resolution	1 920	x	1 080	pixels
13.	Screen diagonal			39,1	cm
14.	Screen diagonal			15	inches
15.	Visible screen area			6,5	dm^2
16.	Panel technology used			LED LCD	
17.	Automatic Brightness Control (ABC) available			No	
18.	Voice recognition sensor available			No	
19.	Room presence sensor available			No	
20.	Image refresh frequency rate (default)			60	Hz
21.	Minimum guaranteed availability of software and firmware updates (from the date of end of the placement on the market)			1	Years
22.	Minimum guaranteed availability of spare parts (from the date of end of the placement on the market)			1	Years
23.	Minimum guaranteed product support			1	Years
	Minimum duration of the general guarantee offered by the supplier			1	Years
24.	Power supply type	External			
25.	External power supply (non standardized and included in the product box)				
	i	Power adapter			
	ii	Input voltage		215	V
	iii	Output voltage		22,0	V
26.	External standardised power supply (or suitable one if not included in the product box)				
	i	-			
	ii	Required output voltage		-	V
	iii	Required delivered current (minimum)		-	A
	iv	Required current frequency		-	Hz

Model placed on the Union market from 06/11/2024.

EPREL registration number: 2189408 https://eprel.ec.europa.eu/qr/2189408

Supplier: ENIF PEGASUS S.R.L. (Authorised representative) **Website:**

Customer care service:

Name: ENIFPEGASUSSRL **Website:**

Email: marinoecormack@outlook.com **Phone:** 004076851176

Address:
MIHAI, Bloc 42, Scara 1,
Etaj 5, Apartament 29,
22882 Bucuresti Sectorul 2,
Romania

Image: A user demonstrating enhanced work efficiency with the siaviala dual portable monitor extender, displaying multiple applications across screens, leading to a 200% increase in work efficiency.

Package Contents

Please verify that all items listed below are included in your package:

- 1 x Portable Monitor
- 1 x USB-A to USB-C Cable

- 1 x USB-C to USB-C Cable
- 1 x HDMI to Type-C Cable
- 1 x Single Screen Stand



Image: Visual representation of the complete package contents for the siaviala P5 monitor extender, including the monitor, various cables, and stand.

Setup and Connectivity

The siaviala P5 monitor extender offers flexible connectivity options. Ensure your laptop is compatible with the chosen connection method.

1. Single Cable Type-C Connection (Plug & Play)

If your laptop has a full-featured USB-C port (which supports both video signal and power delivery), you only need one USB-C to USB-C cable for both power and display.

1. Connect one end of the USB-C to USB-C cable to your laptop's full-featured USB-C port.
2. Connect the other end of the USB-C to USB-C cable to the monitor extender's USB-C port (labeled "TYPE-

C1" or similar, typically for power and display).



Image: Detailed diagram showing how to connect the monitor extender using a single USB-C to USB-C cable for both power and video, ideal for full-featured USB-C ports.

2. Two Cable Connection (HDMI + USB-A)

If your laptop does not have a full-featured USB-C port, you will need two cables: one HDMI cable for video transmission and one USB-A to USB-C cable for power.

1. Connect one end of the HDMI to Type-C cable to your laptop's HDMI port.
2. Connect the Type-C end of the HDMI to Type-C cable to the monitor extender's USB-C port (labeled "USB C with DP" or similar, typically for video input).
3. Connect one end of the USB-A to USB-C cable to your laptop's USB-A port.
4. Connect the other end of the USB-A to USB-C cable to the monitor extender's USB-C port (typically for power).



Image: Illustration demonstrating the two-cable connection method, utilizing an HDMI cable for video and a USB-A to USB-C cable for power, suitable for laptops without full-featured USB-C ports.

Note: The monitor extender is designed to fit laptops ranging from 13 to 17.3 inches. It features a stretchable design to accommodate various laptop sizes securely.



Image: The monitor extender's adjustable design, demonstrating its compatibility and secure fit for laptops between 13 and 17.3 inches.

Operating Modes

The siaviala P5 supports multiple display modes to suit your workflow and enhance productivity:

1. Extended Mode

In Extended Mode, the monitor extender acts as a separate display, expanding your desktop workspace. This allows you to view different applications or content on each screen, significantly boosting productivity.



Image: A visual example of the monitor extender operating in Extended Mode, providing an expanded desktop for multitasking.

2. Mirror Mode (Duplicated Mode)

Mirror Mode duplicates your laptop's display onto the monitor extender. This is useful for presentations or sharing your screen with others, ensuring everyone sees the same content.



Image: The monitor extender in Mirror Mode, duplicating the laptop's display, ideal for presentations or collaborative viewing.

3. Second Screen Mode

In Second Screen Mode, you can use the monitor extender as the primary display while the laptop screen is off or closed. This is ideal for using the extender as a standalone portable monitor with its included stand.



Image: The monitor extender configured as a standalone second screen using its integrated stand, shown in portrait orientation for document viewing or coding.

Rotation and Orientation

The monitor extender can be rotated up to 180 degrees for optimal viewing angles. It also supports both landscape and portrait orientations when used with its stand, offering flexibility for different tasks like coding or document review.



Image: An image highlighting the monitor extender's 180-degree swivel capability and the robust design of its integrated stand for flexible positioning.

Compatibility

The siaviala P5 monitor extender is widely compatible with various operating systems and devices:

- **Operating Systems:** Windows, macOS, Chrome OS, Android, Linux, Dex, Switch.
- **Devices:** Laptops (13-17.3 inches), desktop computers, mini PCs, gaming consoles, and some smartphones (with full-featured Type-C port supporting desktop mode).

Maintenance

To ensure the longevity and optimal performance of your siaviala P5 monitor extender, follow these maintenance guidelines:

- **Cleaning:** Use a soft, lint-free cloth to gently wipe the screen and exterior surfaces. For stubborn marks, slightly dampen the cloth with water or a screen-safe cleaning solution. Avoid harsh chemicals or abrasive materials.

- **Storage:** When not in use, store the monitor extender in a cool, dry place, away from direct sunlight and extreme temperatures. Use the provided packaging or a protective case to prevent scratches and damage.
- **Handling:** Handle the device with care. Avoid dropping it or subjecting it to strong impacts. Do not place heavy objects on top of the monitor.
- **Cable Management:** Ensure cables are not bent sharply or tangled, which can cause damage over time.

Troubleshooting

If you encounter issues with your siaviala P5 monitor extender, please refer to the following common solutions:

1. **No Display/Black Screen:**
    - Ensure all cables are securely connected to both the laptop and the monitor extender.
    - If using a single USB-C cable, confirm your laptop's USB-C port is full-featured (supports video output and power delivery).
    - If using HDMI+USB-A, ensure both cables are connected and the USB-C port on the extender is correctly identified for video input (e.g., "USB C with DP").
    - Check your laptop's display settings to ensure the external monitor is detected and configured (e.g., Extended, Duplicate).
    - Try connecting the monitor extender to a different laptop or device to rule out a laptop-specific issue.
2. **Flickering Screen:**
    - Ensure cables are not loose or damaged.
    - Reduce the screen brightness if it's set too high.
    - Update your laptop's graphics drivers.
3. **No Sound (if applicable):**
    - Check your laptop's sound output settings to ensure the monitor extender is selected as the audio device.
    - Adjust the volume on both your laptop and the monitor extender (if it has volume controls).
4. **Monitor Not Fitting Laptop:**
    - Ensure your laptop size is within the supported range of 13 to 17.3 inches.
    - Adjust the sliding mechanism of the extender to fit your laptop's dimensions.

If these steps do not resolve the issue, please contact siaviala customer support for further assistance.

Specifications

Feature	Detail
Brand	siaviala
Model Number	P5
Screen Size	15.6 inches
Resolution	FHD 1080p (1920 x 1080)

Feature	Detail
Display Technology	IPS LCD
Aspect Ratio	16:9
Refresh Rate	60 Hz
Response Time	3 Milliseconds
Brightness	300 cd/m²
Contrast Ratio	2000:1
Viewing Angle	178 Degrees
Screen Surface	Matte
Connectivity	HDMI, USB-C
Adaptive Sync	FreeSync
Product Dimensions	36.5 x 20.98 x 2.46 cm
Weight	2.17 kg
Color	Black
Origin	China
UPC	721713735729
GTIN	721713735729

For detailed energy efficiency information, please refer to the official EPREL product information sheet:EPREL Product Sheet

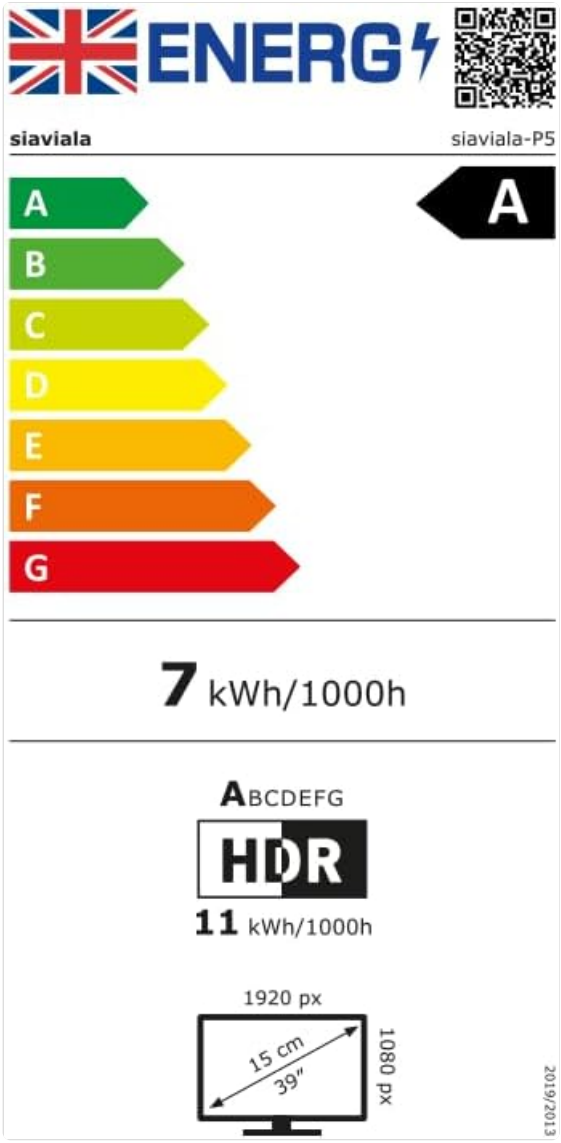


Image: The energy label for the siaviala P5 monitor extender, indicating its energy efficiency class and power consumption details.

Warranty and Support

siaviala provides customer support for any inquiries or issues you may have with your product.

- **Customer Service Email:** marinoecmack@outlook.com
- **Website:** https://eprel.ec.europa.eu/qr/2189408 (This link is from the product information sheet, which also contains contact details for the authorized representative).
- **Phone:** 004076851176
- **Manufacturer:** Shenzhen Baijiayoupu Technology Co., Ltd
- **Guaranteed Product Support:** 1 Year
- **Guaranteed Software Updates:** Unknown

For quick resolution of any product-related questions, please click on "siaviala official" on the product page or use the contact information provided above.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DNF892T3

More documents and user manuals: **https://manuals.plus/**