



EZTRUNK JK 2011 2 Door Rock Solid Secure Locking Trunk Instruction Manual

[Home](#) » [EZTRUNK](#) » EZTRUNK JK 2011 2 Door Rock Solid Secure Locking Trunk Instruction Manual 

Contents

- [1 EZTRUNK JK 2011 2 Door Rock Solid Secure Locking Trunk](#)
- [2 Please read instructions fully before beginning assembly](#)
- [3 How to open and close the EZTRUNK](#)
- [4 Security straps are for Extra Protection DO NOT OVER TIGHTEN](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)



EZTRUNK JK 2011 2 Door Rock Solid Secure Locking Trunk



Customer Service

Any question call

Call 203-901-0055 / 203-591-9060












EMAIL US: SERVICE@EZTRUNK.NET

Monday – Friday 8:30 am – 4: 30 pm EST


Go to EZTRUNK.NET for Video Manual

DO NOT RETURN TO THE STORE!

Please read instructions fully before beginning assembly

NO	Illustration	Description	Part #	QTY.
1		EZTRUNK	201121	1
2		Round Panel	2011213	2
3		Base Plate Bolts M6x40	76401	2
4		Base Plate Screws M5 x 7	55071	7
5		Base Plate Wrench - T30	60030	1
6		Door Latch Wrench - T45	60045	1
7		Rubber Strip (On Trunk)	00214	1
8		You can also use this rubber instead of the Rubber on the EZTRUNK if your DOOR does not close	00134	1
9		Webbing Bracket - Driver	11256	1
10		Webbing Hook - Passenger	11257	1
11	 Extra Parts	Rubber Pad Insulator This is for Noise Supression if needed	11203	6


RECOMMENDED TOOLS



Phillips Screw Driver

PLEASE NOTE:

DO NOT USE ELECTRIC TOOLS, THIS WILL CAUSE SCREWS TO STRIP
 USE SCREW DRIVER
 DO NOT OVER TIGHTEN

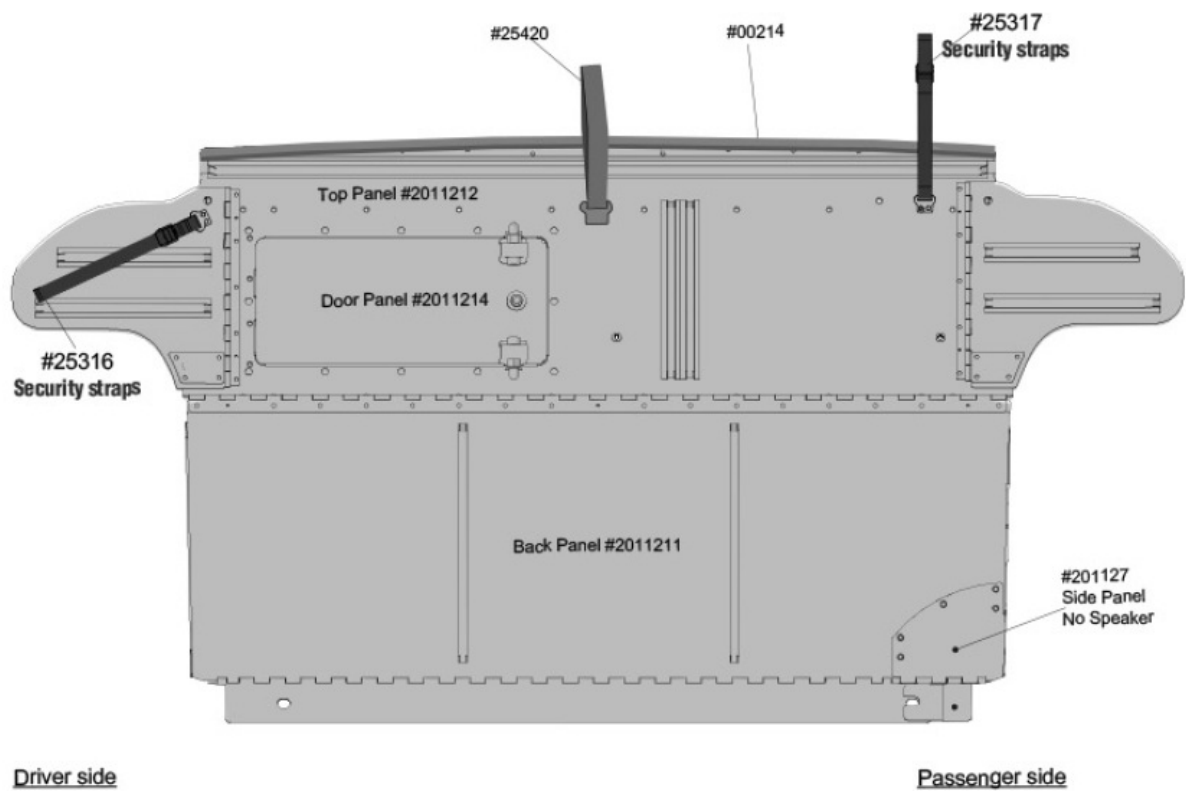

If you don't have a speaker skip steps 1,2 and 3 on Page 4.

PLEASE NOTE




THIS RUBBER PIECE COMES ON EZTRUNK



YOU CAN ALSO USE THIS RUBBER INSTEAD OF THE RUBBER ON THE EZTRUNK IF YOUR DOOR DOES NOT CLOSE


No Speaker

1

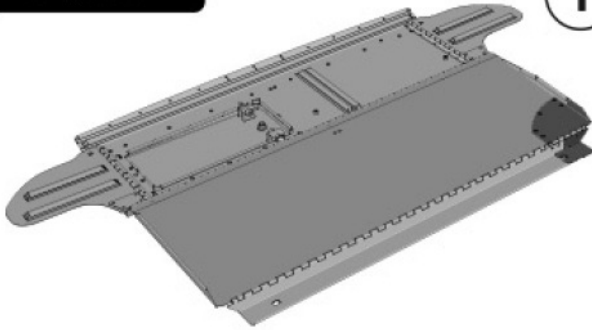

Speaker Version


2

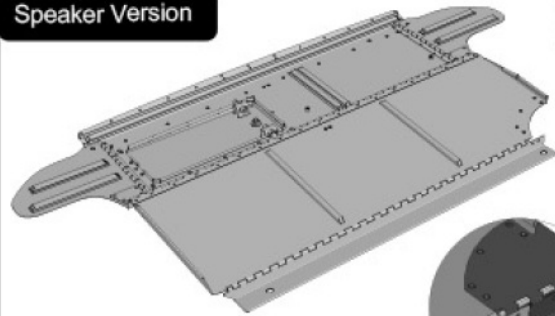

1. If you have a Speaker , Remove the screws for the Side Panel #201127 on passenger side.

Speaker Version

3

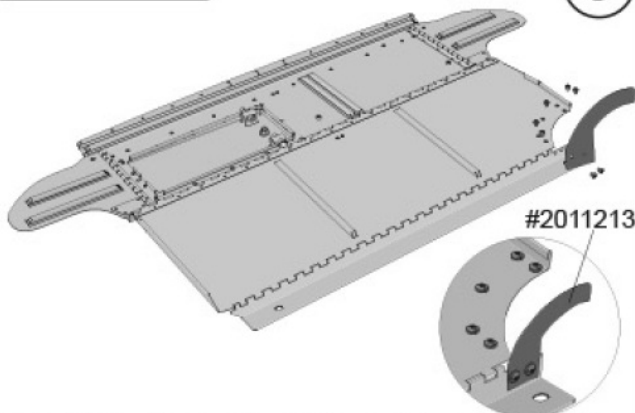

1. Install the 5 screws back into the holes and install the new round panel for the speaker version.

4



Remove D rings and bolts from Driver and Passenger side.


5



1. Put the EZTRUNK carefully into Jeep
2. Make sure there is an even gap on each side of the panel.

Driver Side


6

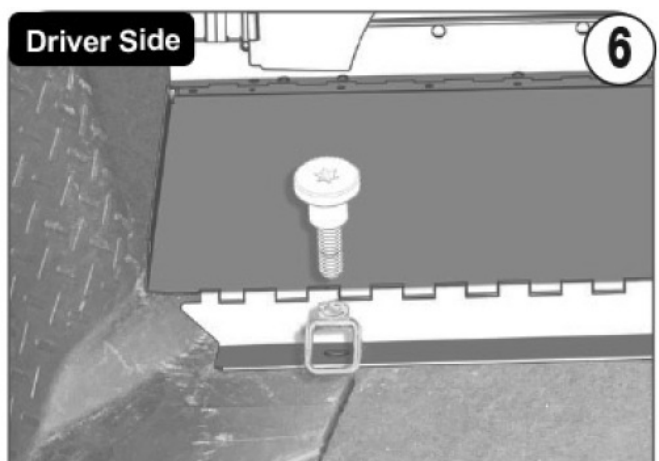

1. Bolt the D ring and Eztrunk to the Jeep with the new longer screws provided.

Passenger Side W/O Speaker


7A

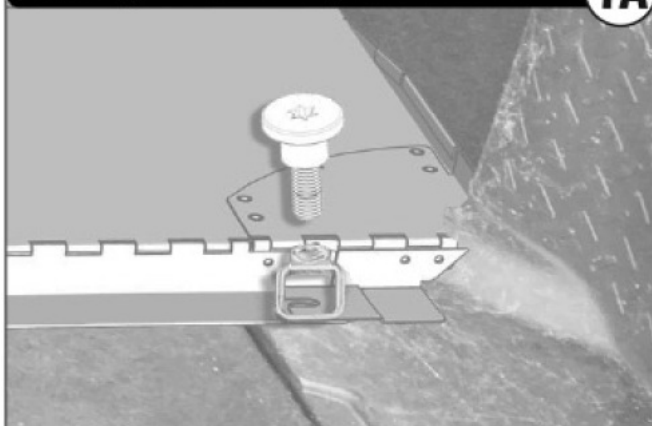

1. Bolt the **D ring** and Eztrunk to the Jeep with the new longer screws provided.

IF YOU HAVE THE OEM SPEAKER USE THIS MOUNTING BRACKET

7B

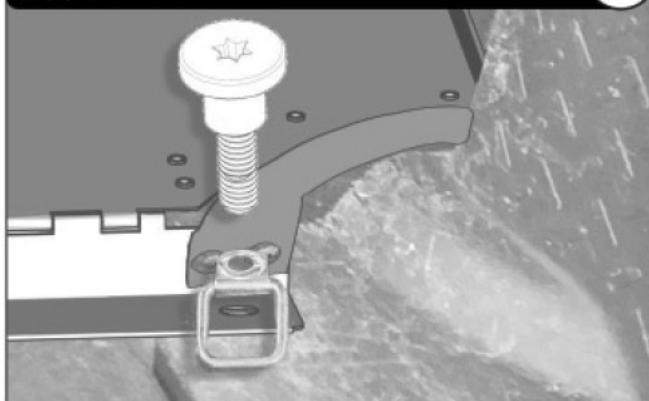

1. Bolt the **D ring** and Eztrunk to the Jeep with the new longer screws provided.

Extra Security Brackets Driver side

8



1. Remove upper door latch bolt to install the Bracket
2. **Do not loosen the bottom bolt or you will need to adjust the door**

Extra Security Passenger side


9



1. Locate D Ring on the passenger side near the door hinge
2. Remove bolt and install the webbing hook on top of the D Ring

How to open and close the EZTRUNK

10

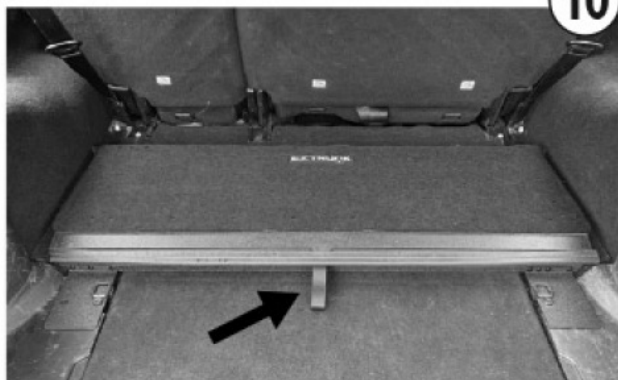


1. Pull the EZTRUNK up with webbing.

11



1. Flip open both side Wing panels

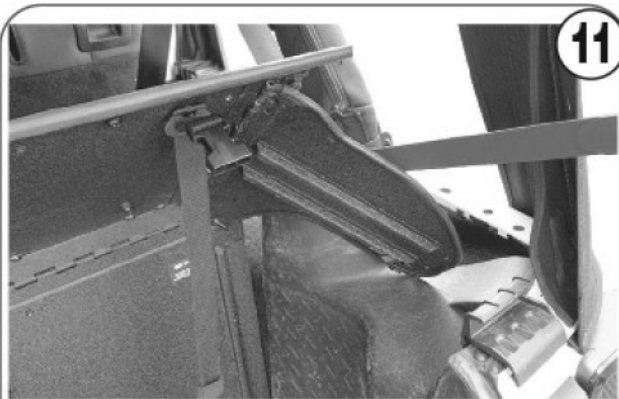

11


Hold both wing panels . The wings will slide under the metal jeep edges on both sides of the jeep



12

Closing the the rear door. You will need to close the door a little harder to make sure the EZTRUNK locks in place.

Security straps are for Extra Protection DO NOT OVER TIGHTEN

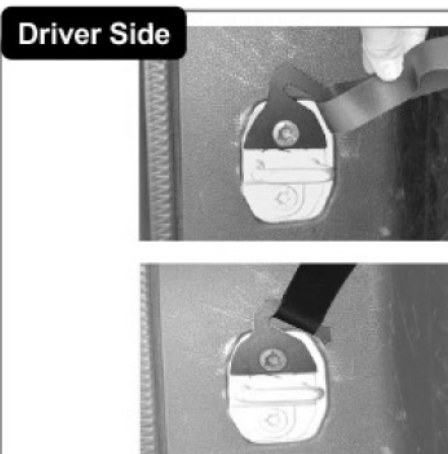

13

1. Slide the webbing loop in place
2. Secure EZTRUNK by pulling on the end of the webbing



14

1. Slide the webbing loop in place
2. Secure EZTRUNK by pulling on the end of the webbing. **DO NOT OVER TIGHTEN**



15

1. Pull the webbing snug
2. Make sure the trunk fits into the groove in the back of the tailgate door. **DO NOT OVER TIGHTEN**

A1 & A2

When installing the EZTRUNK with the hardtop on, there will be a wire and a hose in the back corner, take them

both and push them in the corner before putting EZTRUNK in place.

A1



A2




B1 & B2

If the wires are there but not connected to the hardtop then take the wires and hose then lift the plastic on the side by the rollbar and place the wires under the plastic for storage. This needs to be done before the EZTRUNK is placed in an upright closed secure position.

B1



B2

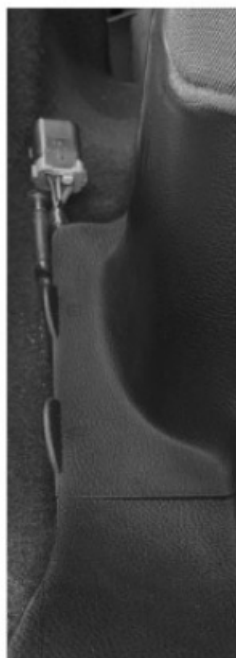

ELECTRIC DOOR LOCKS

Look at the video on EZTRUNK.NET to unplug/disable the power door lock actuator in the tailgate.

Any problems call


203-591-9060

EZTRUNK.net

Service@EZTRUNK.net

EZTRUnK

Documents / Resources

	<p>EZTRUNK JK 2011 2 Door Rock Solid Secure Locking Trunk [pdf] Instruction Manual JK 2011 2 Door Rock Solid Secure Locking Trunk, JK 2011, 2 Door Rock Solid Secure Locking Trunk, Rock Solid Secure Locking Trunk, Solid Secure Locking Trunk, Secure Locking Trunk, Locking Trunk, Trunk</p>
---	---

References

- [User Manual](#)