



F40C4TMP CR12 12-Volt Refrigerator User Manual


[Home](#) » [F40C4TMP](#) » F40C4TMP CR12 12-Volt Refrigerator User Manual 

Contents

- [1 F40C4TMP CR12 12-Volt Refrigerator](#)
- [2 Features](#)
- [3 Safety instructions](#)
- [4 The function and operation setting.](#)
- [5 FAQ](#)
- [6 FOod storage](#)
- [7 Defrosting](#)
- [8 Care and cleaning](#)
- [9 The following situations are normal](#)
- [10 Technical Specification](#)
- [11 FCC Statement](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)



F40C4TMP CR12 12-Volt Refrigerator

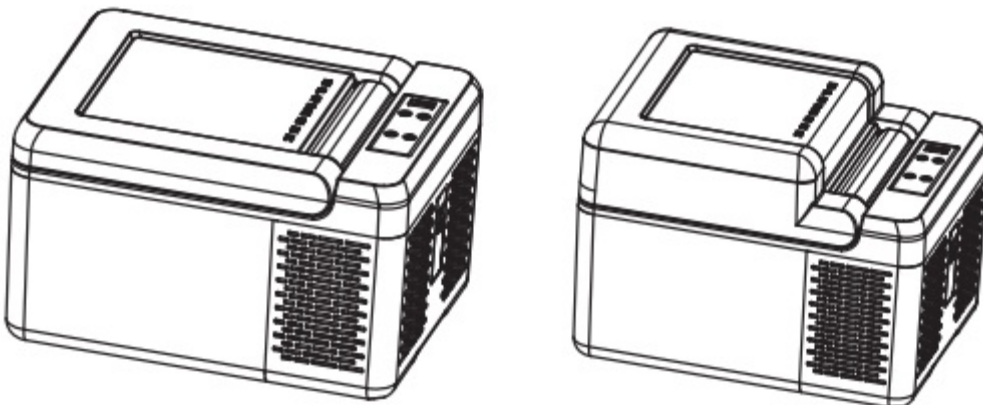

Features




- High-efficiency DC inverter compressor and conversion module with high reliability and long life.
- Fluoride-free insulation with good heat preservation performance and low energy consumption.
- 12/24VDC and 100-240VAC power supply, allow use in the car or at home.
- Compressor delay protection
- Quick cooling to -20°C(based on 25 °C ambient temperature).
- Intelligent car battery protection system.
- Dual door opening direction.
- Wide range electronic temperature control.

Safety instructions

- Warning: Do not attempt or continue to operate your unit if it is wet. The installation of the DC power source in the boat should be handled by qualified personnel.
- Make sure the voltage is within the correct range for the socket and cable being used. The technical data label on the side of the unit shows the voltage ranges. No electrical devices inside the refrigerator as they may be damaged.
- During transportation, slope less than 45° and handle carefully.
- Your unit requires good ventilation, allow the following free space for the air circulation: Back: 200mm
Side:100mm
- The unit must be placed in dry and ventilated place which is far from a heat source (such as stove, flue) and avoid direct sunshine. It is recommended to operate the unit on a flat surface. Maximum operation angle is 30.
- One piece inner tank allows water-filled but doesn't allow pouring out water by inverting the unit. Keep the shells of the unit drying after rained. Not allow dumping the unit in the water Although the units has been cleaned before leaving factory, we strongly recommend to use soft cloth dampened with warm water and a little neutral detergent to clean it again, after that wipe it with dry soft cloth.(Warning: Electrical parts can be wiped by dry cloth only)
- Warning: Do not allow children to play games with the fridge such as climbing or standing in the refrigerator. They could damage the fridge and seriously injure themselves.

The function and operation setting.

- Power: DC 12/24V or AC 100-240V (with adaptor). DC 12/24V (Input power is 12V for built-in battery models).
Adaptor and power cord are subject to real purchase of different models
- Operation setting
 - ON/OFF: Plug in; press the ON/OFF button to start the unit. Press the ON/OFF button again, the unit is turn off.
 - Press the button+ UP or DOWN button to adjust target temperature. Press set button to enter the economy running mode
 - ECO(Energy-saving mode)
 - MAX(Fast cooling mode) Factory Default is MAX code

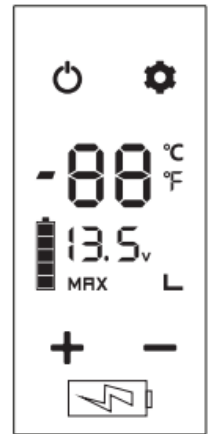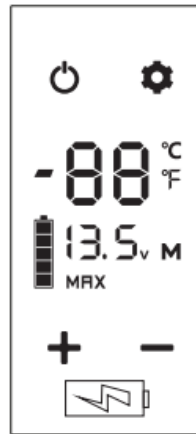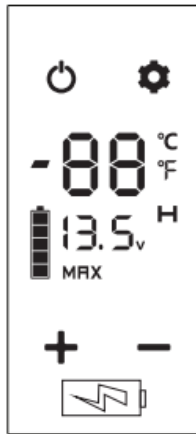

- Battery Protection Mode: under the running state, long press setting button for three seconds until screen flashes, then press the setting button again to select protection mode H(High), M(Medium) and L(Low) ("Factory setting is H). When the unit is connected to the car, we suggest setting the battery protection to H3 (H) level. H2 (M) and H1 (L) are suggested when the unit is connected to the backup battery. Different car may have different power output voltages. If the voltage protection display (F1 display in the LED), then setting the battery protection from H3 to H2 or H1. Most cars will stop power supply if engine is stopped. But some cars will continue power supply even engine is stopped. If your refrigerator is still working when the engine of the car is stopped, you should adjust the battery protection to H3 (H), otherwise, the power of your car battery may run out and your car battery may not have enough power to start car. Copyfish

FAQ

The appliance is out of work:

- Check the power supply connection and Whether the plug and the socket have a good connection.
- Whether the fuse has been burned out.
- Whether the appliance has been turned on
- Whether the compressor is in delay start protection when the appliance is starting up.

The food inside is frozen:

- The setting temperature is too low. Hear the sound of water from the inside place. It is normal, due to the flow of refrigerant.

Display F1 code

- Low power protection, setting the protection from H3 (H) to H2 (M) or H1 (L)

Display F2 code

- Fan overload protection, turn off the unit and restart the unit after 30 minutes. If the F2 is still displayed, please contact the after-sales person.

Display F3 code

- The compressor protection is activated. Please turn off the unit and restart the unit after 30 minutes. If the F3 is still displayed, please contact the after-sales person.

Display F5 code

- Compressor controller module protection is activated. Please turn off the unit, keep it Copyfish display Display - Te display

Food storage

Freezer (below -20°C)

- Meat should be cut and wrapped tightly, and then averagely placed in the freezer.
- After buying frozen food, put it in the freezer as soon as it is still in frozen condition.
- Do not put the fresh food and frozen food together.
- Do not put the fruit and vegetable in the freezer to avoid freeze-drying.
- Do not put the glass container or other container with sealed liquid in the freezer. Or there is a possibility of explosion.

Refrigerator (0°C ~10°C)

- Eggs, butter, milk and bottled drinks can be put in the refrigerator.
- Fruit and vegetables should be put in the crisper for moisture retaining.
- Hot food should be cooled down before it's placed in, which could help to save power.
- Food must be packed into fresh-keeping bags. Leaving space between packaged foods to keep the circulation of cool air.

Defrosting

1. After the refrigerator working for a period, frost could be seen on surfaces in the freezer, which reduces refrigerating effect and increases power consumption. In the case, you need to defrost it.
2. Unplug the refrigerator and open the doors, take the food in the refrigerator to cool place. Use a defrosting shovel to remove ice and frost (also can just let the door open, then ice and frost will be thawed by the raising temperature). Then use dishtowel to wipe off the ice water. After that, place the food back to the refrigerator and plug in. Note: Do not use sharp metal tools to defrost which will damage the refrigerator.

Care and cleaning

1. Unplug the fridge before cleaning Use soft cloth dampened with warm water to wipe the inner surfaces and external appearance of the refrigerator. Use neutral detergent to clean the heavy stains, and dry with clean soft cloth. For long vacations or absences, remove food and unplug the fridge .
2. Clean it and leave the lid open a little. Then place the refrigerator in a ventilated place. NOTE: Do not sprinkle water on the fridge during cleaning because that would reduce the insulating property of electrical components and erode the metal parts. Do not use cleaners containing corrosive and deliquescent material such as scouring powder, bleach, soap powder, alkaline cleansers, benzene, gasoline, acid, hot water and etc.) to clean the appearance panels, door gaskets and plastic parts.

The following situations are normal

1. The flow of refrigerant through the evaporator may create a boiling or gurgling sound. In the raining and high humidity weather, moisture may form on the outside of fridge or door gaskets. You can wipe damp surfaces with dry cloth.
2. The temperature on the back panel may be high (particularly in summer) due to heat emission of the condenser.
3. The temperature on external surface of the compressor may be high when compressor is working.
4. The compressor may cause a high hum or pulsating sound when it is at starting or stopping step. It's normal to

hear metal hit noise from compressor when fridge is bumped.

Technical Specification

MODEL	CR9/CR12
CLIMATIC CATEGORY	T/ST/N/SN
PROTECTIVE CLASSIFICATION OF ELECTRIC SHOCK RESISTANCE	III
RATED VOLTAGE DC (V)	12/24V
RATED INPUT POWER (W)	45W
RATED CURRENT FOR DC(A)	4.0A/2.0A
REFRIGERANT (g)	R134a/24g
N.W(kg)	6.7kg/6.9kg

Guidelines

DISPOSAL: Do not dispose this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary. Meaning of crossed-out wheeled dustbin: Do not dispose of electrical appliances as unsorted municipal waste. Use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed into landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is Connected.
- Consult the dealer or an experienced radio/TV technician for help this device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

 <p>The image shows the front cover of a user manual for the F40C4TMP CR12 12-Volt Refrigerator. At the top left is the F40C4TMP logo. Below it, the text 'USER MANUAL' is centered. Underneath, there are two line drawings of the refrigerator units, one labeled 'Model: CR9' and the other 'Model: CR12'. At the bottom, there is a small line of text: 'Please read the operating manual carefully before starting the device. Read it again from time to time.' The cover has a dark grey header and footer with a white background in the center.</p>	<p>F40C4TMP CR12 12-Volt Refrigerator [pdf] User Manual CR12-MINI12, CR12MINI12, 2A449CR12-MINI12, 2A449CR12MINI12, CR12 12-Volt Refrigerator, CR12, CR9, 12-Volt Refrigerator</p>
---	---