

FABER WIREBOX2 Wiring Box Kit Instruction Manual

Home » **FABER** » **FABER** WIREBOX2 Wiring Box Kit Instruction Manual



Contents

- 1 FABER WIREBOX2 Wiring Box
- 2 PARTS
- 3 Documents / Resources
- **4 Related Posts**



FABER WIREBOX2 Wiring Box Kit



WARNING: TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS, OBSERVE THE FOLLOWING:

- Installation work and electrical wiring must be done by qualified person(s) in accordance with all applicable codes and standards, including fire-rated construction.
- When cutting or drilling into wall or ceiling, do not damage electrical wiring and other hidden utilities.


CAUTION: To reduce The Risk Of Fire and Electric Shock, this Rangehood Wiring Box Kit shall be used only with Faber Rangehood Models that have been investi-gated and found acceptable for use with this Kit. See hood manual to determine compatibility.

PARTS


PARTS INCLUDED

REF.	PART			QTY
Н	Pozi Screws (2/16" x 6/16")	*		2
G	Pozi Screws (3/16" x 1/8")		(D)	2
I	Cover			1


NOTE: this is only used with the Breva hood products.

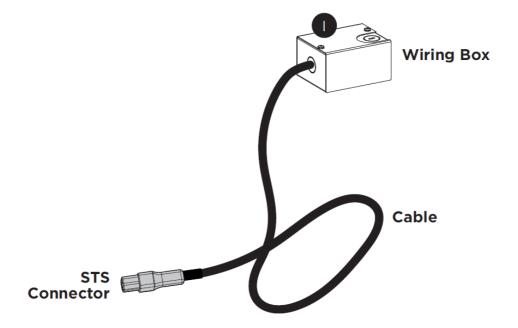


1. Disconnect the power cable from the control box.

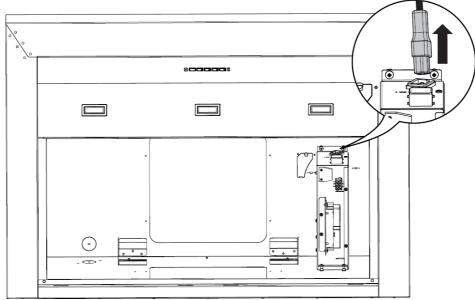


2. Remove the power cable from the hood and away from the strain relief. Place the strain relief back into the hole.

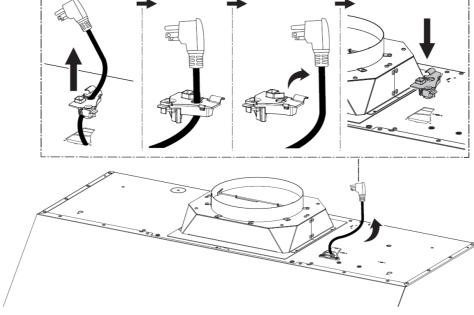


3. Attach the Wiring Box to the hood with 2 screws (G) in rear or top position.

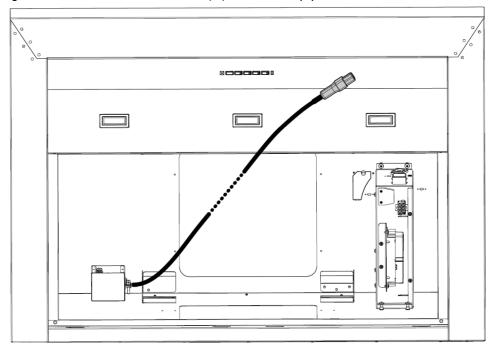


Rear position:

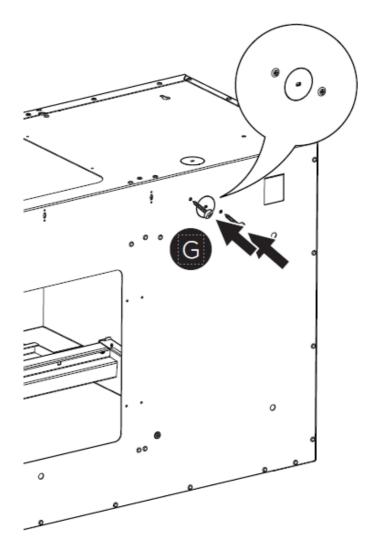


Top position:

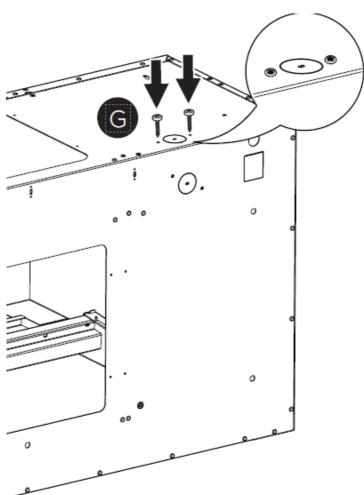


4. Connect the Power Supply Cable to the rangehood. Attach the White lead of the power supply to the White lead of the rangehood with a twist-on type wire connector. Attach the Black lead of the power supply to the Black lead of the rangehood with a twist-on type wire connector. Connect the Green (Green and Yellow) ground wire under the Free Green grounding screw.

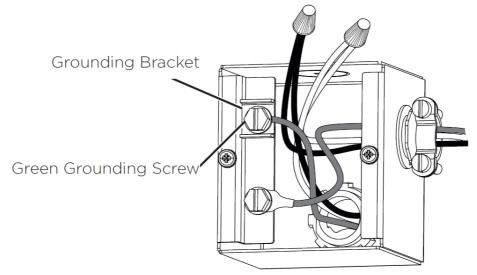

5. Close the Power Supply box with 2 screws (H).

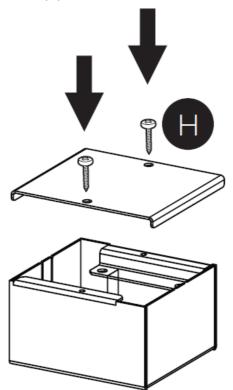

6. Connect the Power Supply Cable to the rangehood.

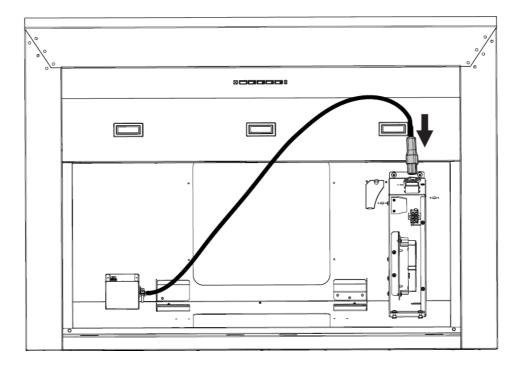

Documents / Resources



Manuals+,