

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Yinker](#) /

> [Yinker Z80A 15.6" Triple Portable Monitor Laptop Screen Extender User Manual](#)

Yinker Z80A

Yinker Z80A 15.6" Triple Portable Monitor Laptop Screen Extender User Manual

Model: Z80A | Brand: Yinker

1. INTRODUCTION

The Yinker Z80A 15.6" Triple Portable Monitor is designed to expand your laptop's display capabilities, offering two additional 15.6-inch Full HD (1920x1080) IPS screens. This device enhances productivity and provides versatile display options for various computing environments. It features 360° rotation, multiple folding modes, and broad compatibility with various operating systems and devices.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- Laptop Screen Extender (Z80A) x1
- USB Connection Cable x1
- Power Cable x1
- Power Adapter x1
- Carrying Bag x1
- USB Driver x1
- User Manual x1

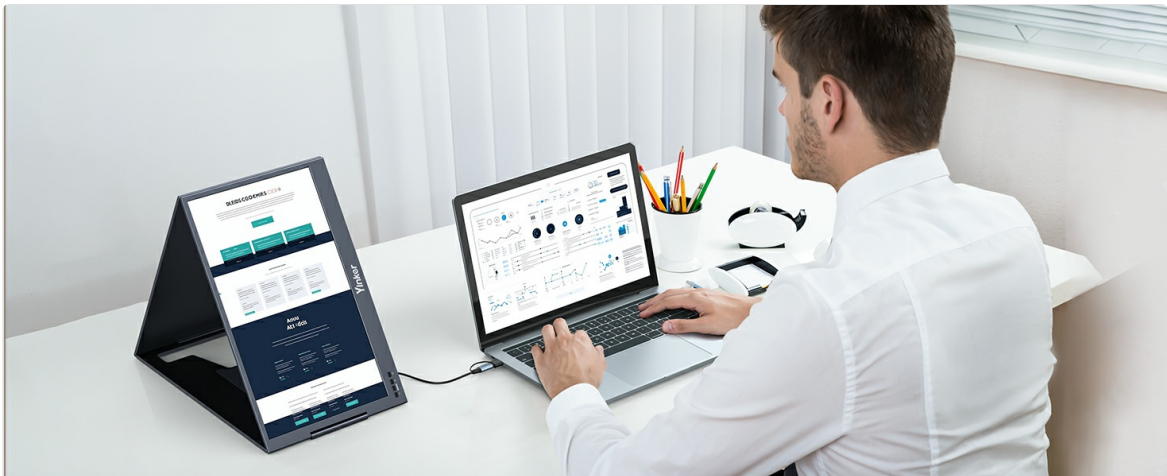


Image: Overview of the Yinker Z80A package contents.

Your browser does not support the video tag.

Video: A brief overview of the Yinker Portable Monitor and its components.

Your browser does not support the video tag.

Video: Demonstrates the Yinker Laptop Screen Extender being placed into its portable carrying bag.

3. SETUP

3.1 Initial Connection

The Yinker Z80A can be connected to your laptop using a single USB-C cable for both power and video signal, provided your laptop's USB-C port supports full functionality (video output and power delivery). If your laptop does not support full-function USB-C or requires additional power, use the provided power cable and adapter.



Image: Connection methods using full-function USB-C or USB-A with power.

3.2 Driver Installation

Driver installation is required for first-time use. Please use the provided USB driver or download the necessary software from the official Yinker website. Follow the on-screen instructions for installation.



Image: Driver installation process for the screen extender.

Your browser does not support the video tag.

Video: Step-by-step guide on how to connect the Yinker Extender to your laptop.

Your browser does not support the video tag.

Video: Instructions for connecting your phone to the Yinker Extender.

4. OPERATING MODES

The Yinker Z80A supports various display modes to suit your needs:

- **Extended Mode:** Expand your desktop across all three screens for increased workspace.
- **Mirror Mode:** Duplicate your main laptop screen onto the external monitors, ideal for presentations.
- **Portrait Mode:** Rotate the screens 90° for vertical viewing, suitable for coding, reading, or social media.
- **Presentation Mode:** Fold the screens into a triangular shape for easy sharing during meetings.

Please Check the Interface of Your Laptop Before Use



Image: Different display modes including Extended, Mirror, and Portrait.

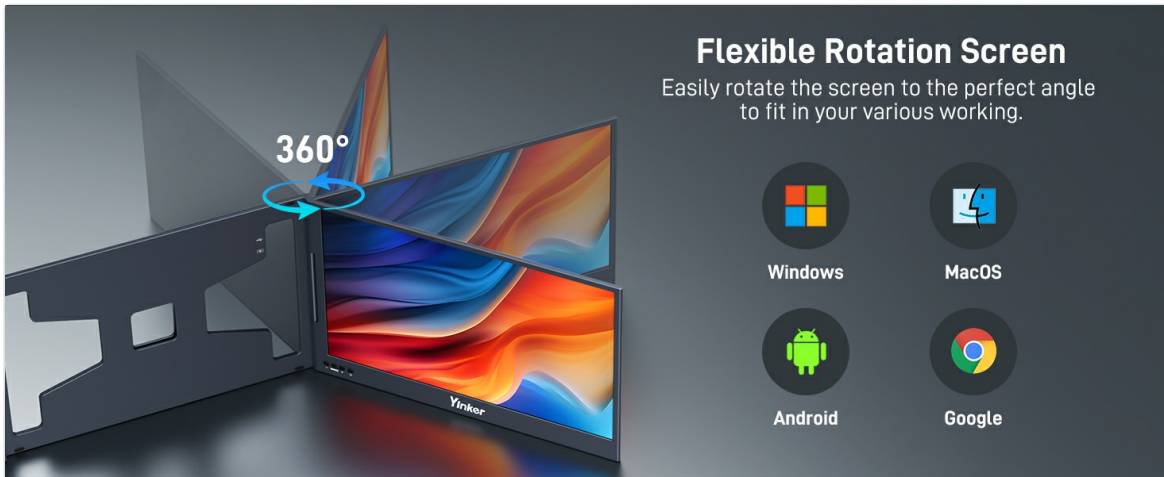


Image: Flexible 360° rotation of the screen extender.

Your browser does not support the video tag.

Video: Demonstration of the 360-degree folding screen functionality.

Your browser does not support the video tag.

Video: Guide on how to set the screen to vertical mode.

5. CONNECTIVITY

The Yinker Z80A offers versatile connectivity options:

- **USB-C:** Single cable connection for power and video (full-function USB-C port required on host device).
- **USB-A:** Connect via USB-A with an adapter, requiring an external power source.
- **Mini HDMI:** For video input, typically requiring a separate USB-C connection for power.
- **3.5mm Audio Jack:** For connecting headphones or external speakers.

The device is compatible with Windows, MacOS (including M1, M2, M3 MacBooks), and Android systems. It supports laptops ranging from 11 to 17 inches.



Image: Wide compatibility with 11-17 inch laptops.

6. SPECIFICATIONS

Feature	Specification
Model Number	Z80A
Screen Size	15.6 Inches (x2)
Resolution	1920 x 1080 (FHD 1080p)
Panel Type	IPS
Aspect Ratio	16:9
Image Brightness	300 nits
Contrast Ratio	1200:1
Color Gamut	100% sRGB
Viewing Angle	178° Wide
Total USB Ports	2 (USB-C)
Other Ports	Mini HDMI, 3.5mm Audio Jack
Item Weight	7.52 pounds
Product Dimensions	17.28 x 11.61 x 3.66 inches

7. MAINTENANCE

To ensure the longevity and optimal performance of your Yinker Z80A screen extender, follow these maintenance guidelines:

- **Cleaning:** Use a soft, lint-free cloth to gently wipe the screens. For stubborn smudges, lightly dampen the cloth with water or a screen-safe cleaning solution. Avoid harsh chemicals or abrasive materials.
- **Storage:** When not in use, fold the screens and store the extender in its provided carrying bag to protect it from dust, scratches, and impacts.
- **Handling:** Always handle the device with care. Avoid applying excessive force to the screens or hinges.
- **Temperature:** Operate and store the device within recommended temperature ranges to prevent damage.

8. TROUBLESHOOTING

If you encounter issues with your Yinker Z80A, refer to the following common solutions:

- **No Signal:** Ensure all cables are securely connected. Verify that your laptop's USB-C port supports video output or that the HDMI cable is properly connected. Check if the necessary drivers are installed.
- **No Power:** If using a non-full-function USB-C port or HDMI, ensure the external power adapter is connected and functioning.
- **Display Settings:** Adjust your operating system's display settings to extend or mirror the display as desired. Ensure the correct resolution is selected.
- **Screen Rotation:** If the screen orientation is incorrect, adjust it in your operating system's display settings.
- **Touchscreen Issues:** Ensure the USB-C connection is fully functional for data transfer, as touch input relies on this. Recalibrate the touchscreen if necessary through your device's settings.

For further assistance, consult the detailed user manual included in your package or contact Yinker customer support.

9. WARRANTY & SUPPORT

The Yinker Z80A 15.6" Triple Portable Monitor comes with a standard manufacturer's warranty. For specific details regarding warranty coverage, duration, and terms, please refer to the warranty card or section within the user manual provided in your product package.

For technical support, troubleshooting assistance, or to inquire about warranty claims, please contact Yinker customer service through the contact information provided in your product documentation or on the official Yinker website.

