

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [TECKNET](#) /

› [TECKNET Wireless Mouse User Manual](#)

TECKNET B0DP2BV113

TECKNET Wireless Mouse User Manual

Model: TECKNET Wireless Mouse (2.4G & BT5.0/3.0) Silent 4800 DPI

INTRODUCTION

Thank you for choosing the TECKNET Wireless Mouse. This manual provides detailed instructions for setting up, operating, and maintaining your mouse to ensure optimal performance. This versatile mouse offers dual connectivity modes (2.4G USB-A and Bluetooth 5.0/3.0), adjustable DPI settings, and a silent click design, making it suitable for various computing environments.





Image: TECKNET Wireless Mouse, showcasing its sleek white design.

PRODUCT OVERVIEW

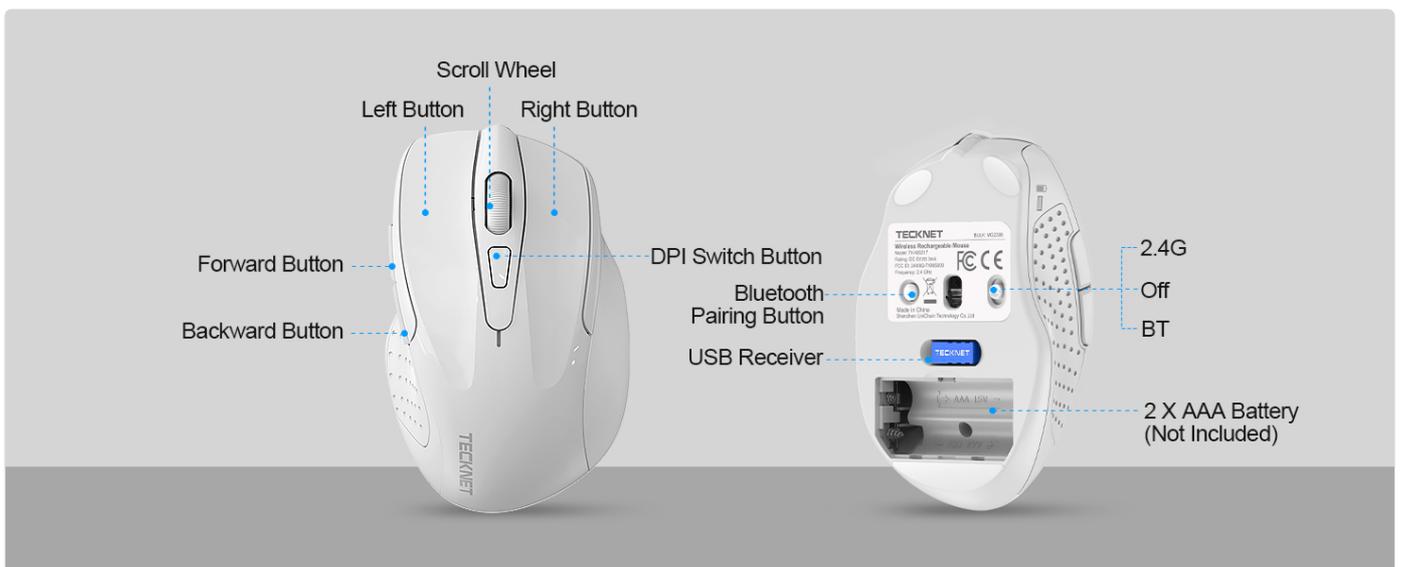


Image: Detailed diagram of the mouse components, including the Left Button, Right Button, Scroll Wheel, Forward Button, Backward Button, DPI Switch Button, Bluetooth Pairing Button, USB Receiver slot, and 2x AAA Battery compartment.

Key Features:

- **Dual Device Connection:** Supports both 2.4G USB-A and Bluetooth 5.0/3.0 for seamless switching between two devices.
- **6 Adjustable DPI Levels:** Customize sensitivity with settings from 800 to 4800 DPI (800/1200/1600/2400/3200/4800).
- **Silent Operation:** Designed for quiet clicks, ideal for noise-sensitive environments.

- **Wide Compatibility:** Works with Windows, macOS, Chrome OS, and Linux systems. (Note: Side buttons may not be compatible with macOS).
- **Long Lifespan & Ergonomic Design:** Built for durability with an ergonomic shape for comfortable use.
- **Intelligent Energy Saving:** Features automatic sleep technology to extend battery life up to 30 months.

SETUP GUIDE

1. Battery Installation

1. Locate the battery compartment on the bottom of the mouse.
2. Open the battery cover.
3. Insert two AAA batteries (not included) into the compartment, ensuring correct polarity (+/-).
4. Close the battery cover securely.



Image: Battery installation for the mouse, highlighting the two AAA battery slots.

2. Connecting via 2.4G USB-A

1. Locate the USB receiver stored in the battery compartment of the mouse.
2. Remove the USB receiver.
3. Plug the USB receiver into an available USB-A port on your computer.
4. Slide the power switch on the bottom of the mouse to the "2.4G" position.
5. The mouse should automatically connect to your computer. The LED indicator will show a green light briefly.



Image: Connecting the mouse via 2.4G USB-A, showing the USB receiver and the mouse's connection mode switch.

3. Connecting via Bluetooth (BT5.0/3.0)

1. Slide the power switch on the bottom of the mouse to the "BT" position.
2. Press and hold the Bluetooth pairing button (usually located near the power switch or DPI button) for 3-5 seconds until the LED indicator flashes blue. This indicates the mouse is in pairing mode.
3. On your computer or device, open Bluetooth settings.
4. Search for new devices and select "TECKNET Mouse" (or similar name) from the list.
5. Follow any on-screen prompts to complete the pairing process. The LED indicator will show a blue light briefly once connected.



Image: The mouse's ability to connect to two devices simultaneously, one via 2.4G and one via Bluetooth.

OPERATING INSTRUCTIONS

DPI Adjustment

The mouse features 6 adjustable DPI (Dots Per Inch) levels, allowing you to customize cursor sensitivity. Press the DPI switch button (located behind the scroll wheel) to cycle through the available settings: 800, 1200, 1600, 2400, 3200, and 4800 DPI. Choose the setting that best suits your task, whether it's precise graphic design or fast-paced browsing.

6 Levels of High-Precision DPI



Image: Visual representation of the 6 adjustable DPI levels for precise control.

Silent Click Feature

This mouse is designed with silent click technology, significantly reducing clicking noise. This feature is particularly beneficial in quiet environments such as libraries, offices, or late-night work sessions, ensuring you don't disturb others.

Silent Click

Inaudible click sound, quiet and focused,
without disturbing others



Image: Demonstrating the silent click feature in a quiet environment.

Side Buttons (Forward/Backward)

The mouse includes two side buttons, typically used for "Forward" and "Backward" navigation in web browsers or file explorers. Please note that these side buttons may not be fully compatible or functional with macOS.

Intelligent Energy Saving & LED Indicator

The mouse incorporates automatic sleep technology to conserve battery life. If the mouse is inactive for a period, it will enter a sleep mode. To reactivate, simply move the mouse or click any button. The LED indicator on the mouse provides status updates:

- **Red Light:** Indicates low battery or DPI adjustment.
- **Blue Light:** Indicates Bluetooth connection status.
- **Green Light:** Indicates 2.4G connection status.



Working



Stand-by



Auto-sleep



Press to activate

Image: Visualizing the mouse's power management states: Working, Stand-by, Auto-sleep, and how to activate it.

LED Indicator

-  **Red Light:** DPI/Low Battery
-  **Blue Light:** Bluetooth
-  **Green Light:** 2.4G



Image: Explanation of the LED indicator lights for DPI/Low Battery (Red), Bluetooth (Blue), and 2.4G (Green).

Ergonomic Design

The TECKNET Wireless Mouse is designed to fit the natural curvature of the human palm, providing enhanced comfort during extended use. It is generally ideal for small to medium-sized hands, though users with larger hands who prefer a compact design may also find it comfortable.



Ergonomic Design


Fits the natural curvature of the human palm to maintain a comfortable feel



Image: The ergonomic design of the mouse, engineered for comfort.

Just for reference

Recommendation according to palm size

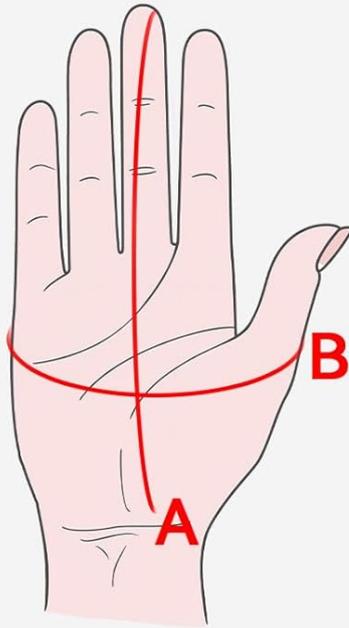

A(Palm Length)

B(Palm Width)

S	<17cm/6.7in	<8cm/3.2in
M	17-19cm/6.7-7.5in	8-10cm/3.2-3.9in
L	>19cm/7.5in	>10cm/3.9in

Recommended Size: S-M

Mouse Size: L x W x H/10.6*6.8*3.8 cm/4.2*2.7*1.5 in

Image: Palm size recommendation chart for optimal mouse fit.

Wide Compatibility

This wireless mouse offers broad compatibility with various operating systems, including Windows, macOS, Chrome OS, and Linux. It works seamlessly with laptops, desktop computers, and other compatible devices.

Ruggedness and Durability Test

Endurance test 6 million clicks



Image: Icons representing the mouse's wide compatibility with different operating systems and devices.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the mouse. Avoid using harsh chemicals or abrasive materials.
- **Battery Replacement:** When the red LED indicator flashes or the mouse performance degrades, replace the two AAA batteries. Ensure to dispose of old batteries responsibly.
- **Storage:** When not in use for extended periods, it is recommended to switch the mouse off to further conserve battery life. Store the USB receiver inside the mouse's battery compartment to prevent loss.

TROUBLESHOOTING

Problem	Solution
---------	----------

Problem	Solution
Mouse not responding.	<p>Check if the batteries are installed correctly and have sufficient charge. Replace if necessary.</p> <p>Ensure the power switch on the bottom of the mouse is in the correct position (2.4G or BT).</p> <p>For 2.4G connection, ensure the USB receiver is securely plugged into a working USB port. Try a different USB port.</p> <p>For Bluetooth connection, ensure Bluetooth is enabled on your device and the mouse is paired. Try re-pairing the mouse.</p>
Cursor is jumpy or erratic.	<p>Clean the optical sensor on the bottom of the mouse.</p> <p>Ensure you are using the mouse on a suitable surface. Avoid highly reflective or transparent surfaces.</p> <p>Adjust the DPI setting to a lower value if the cursor is too sensitive.</p>
Side buttons not working on macOS.	<p>This is a known compatibility limitation. The side buttons may not function on macOS. Basic left/right click and scroll wheel functionality should still work.</p>
Mouse frequently disconnects.	<p>Ensure the mouse is within the effective range of the receiver (for 2.4G) or Bluetooth device.</p> <p>Check for interference from other wireless devices.</p> <p>Replace batteries if they are low.</p>

SPECIFICATIONS

Feature	Detail
Brand	TECKNET
Model	TECKNET Wireless Mouse (2.4G & BT5.0/3.0) Silent 4800 DPI
Connectivity Technology	Wireless (2.4G USB-A), Bluetooth (5.0/3.0)
DPI Levels	800, 1200, 1600, 2400, 3200, 4800
Buttons	6 Buttons (Left, Right, Scroll Wheel, DPI Switch, Forward, Backward)
Movement Detection Technology	Optical
Power Source	2 x AAA Batteries (not included)
Item Weight	3.52 ounces
Package Dimensions	4.53 x 3.15 x 1.85 inches
Country of Origin	China

WARRANTY AND SUPPORT

TECKNET offers a **36-month warranty** for this product (registration may be required). If you encounter any problems in using the product, please feel free to contact our professional customer service team.

For support, please visit the official TECKNET website or refer to the contact information provided with your product packaging.

Return Policy: This product typically comes with a 30-day refund/replacement policy. Please check your purchase details for specific terms.

© 2025 TECKNET. All rights reserved.

For more information, visit [TECKNET Official Website](#)