

Manuals.plus /

› Saker /

› Saker HL133 Foldable Handheld Car Vacuum Cleaner and Air Duster User Manual

## Saker HL133

# Saker HL133 Foldable Handheld Car Vacuum Cleaner and Air Duster User Manual

Model: HL133

## 1. INTRODUCTION

---

Thank you for choosing the Saker HL133 Foldable Handheld Car Vacuum Cleaner and Air Duster. This versatile device is designed for efficient cleaning, dusting, and inflation tasks in various environments, including cars, homes, and offices. Please read this manual thoroughly before use to ensure proper operation and maintenance.

The Saker HL133 features a powerful brushless motor, offering up to 17000PA suction power. Its compact, foldable design enhances portability and storage. The device includes a dual-filter system for effective dust collection and is equipped with a built-in 3\*2500mAH battery for extended use and convenient Type-C charging.

## 2. PACKAGE CONTENTS

---

Verify that all items listed below are included in your package. If any items are missing or damaged, please contact customer support.

- Saker HL133 Main Unit
- Accessory Kit (various nozzles and brushes)
- Blowing Brush
- Flat Suction Nozzle
- Floor Brush
- Inflator Nozzle
- Type-C Charging Cable
- Storage Bag
- User Manual

# BRUSHLESS MOTOR

 STRONG SUCTION

**17000PA**

 HIGH POWER

**120W**



Image: All components included with the Saker HL133, including the main unit, various nozzles, brushes, and charging cable.

### 3. PRODUCT OVERVIEW

The Saker HL133 is designed for portability and multi-functionality. Its foldable body allows for compact storage and easy transport.



Image: The Saker HL133 demonstrating its foldable design and compact dimensions for storage.



Image: Overview of the Saker HL133, showcasing its USB-C charging port, power indicator, and various cleaning capabilities.

#### 4. CHARGING THE DEVICE

Before first use, fully charge the Saker HL133. Use the provided Type-C charging cable to connect the device to a compatible USB power source (e.g., wall adapter, car charger, computer USB port).

- **Charging Indicator:** The power indicator light will show red while charging.
- **Fully Charged:** The indicator light will turn green when the battery is fully charged.
- **Charging Time:** Approximately 3 hours for a full charge.

# WASHABLE FINE STEEL FILTER



Image: The device's charging status indicators (red for charging, green for fully charged) and power levels during operation.

## 5. ASSEMBLY AND ATTACHMENT USE

The Saker HL133 comes with various attachments for different cleaning and inflation tasks. To attach an accessory, align it with the appropriate port (suction or blowing) and twist or push until it is securely in place.

### Attaching for Vacuuming:

- **Flat Suction Nozzle:** Ideal for narrow gaps and corners in car interiors or keyboards.
- **Floor Brush:** Suitable for larger surfaces like car mats, carpets, or upholstery.

### Attaching for Blowing/Dusting:

- **Blowing Brush:** Use for dislodging dust from delicate surfaces, computer keyboards, or car vents.

### Attaching for Inflation:

- **Inflator Nozzle:** Connect to the blowing port for inflating items like balloons or small inflatable toys.

## 6. OPERATING MODES

---

The Saker HL133 offers three primary functions: vacuuming, air dusting (blowing), and inflation.

### Power On/Off and Speed Adjustment:

Press the power button to turn the device on. Subsequent presses will cycle through the three power levels (9000 Pa, 13000 Pa, 17000 Pa). Press and hold the power button to turn off the device.



Image: The Saker HL133 being used in vacuum mode with different attachments for various cleaning tasks.

### Vacuuming Function:

Attach the desired suction nozzle (flat suction or floor brush) to the vacuum intake port. Turn on the device and select the appropriate power level for the task. Direct the nozzle towards the debris to be collected.

**SAKER**

**OTHER**

**VS**

- ✓ **INCREASED EFFICIENCY**
- ✓ **GREATER LIABILITY**
- ✓ **STRONGER SUCTION**

- ✗ **LIMITED LIFESPAN**
- ✗ **ELECTRICAL NOISE**
- ✗ **WEAK SUCTION**

Image: Using the Saker HL133 to vacuum debris from a car's interior.

**Air Duster (Blowing) Function:**

Attach the blowing brush or other suitable nozzle to the air outlet port. Turn on the device and use it to blow away dust from keyboards, car vents, or other surfaces.

## MULTIFUNCTIONAL USAGE SCENARIOS

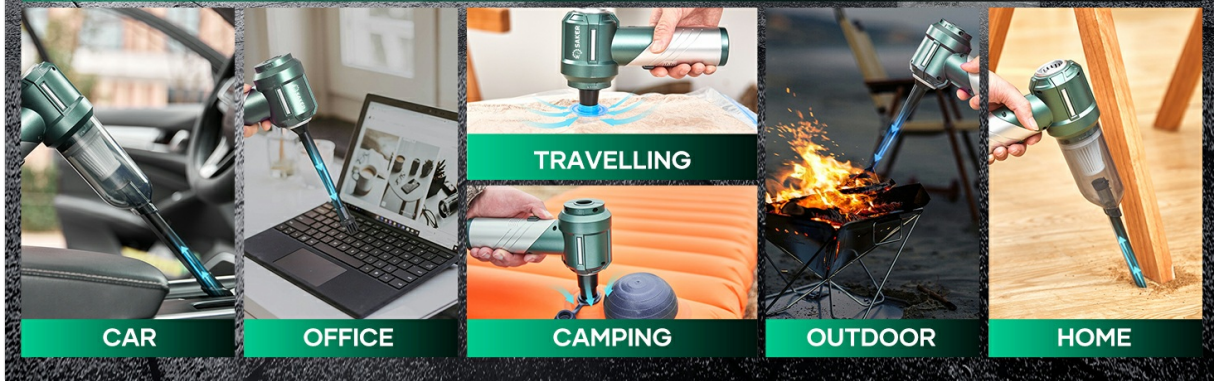


Image: The Saker HL133 being used in blower mode for various tasks, such as cleaning a computer, blowing leaves, and inflating an air mattress.

### **Inflator Function:**

Attach the inflator nozzle to the air outlet port. Turn on the device and use it to inflate small items like balloons or swimming rings.

# MULTIFUNCTIONAL USAGE SCENARIOS-BLOW MODE



Image: The Saker HL133 utilizing its inflator nozzle to inflate a small inflatable ring.

## Product Demonstration Video:

Your browser does not support the video tag.

Video: A demonstration of the Saker HL133's vacuuming, blowing, and inflating capabilities in various scenarios.

## 7. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your Saker HL133.

### Emptying the Dust Cup:

After each use or when the dust cup is full, twist and detach the dust cup from the main unit. Empty the

collected debris into a waste bin.

### Cleaning the Filters:

The Saker HL133 features a double filtering system with a HEPA filter and a fine steel filter. Both are washable and reusable.

- Remove the filters from the dust cup.
- Rinse the filters under running water until clean.
- Allow the filters to air dry completely before reassembling. Do not use the device with wet filters.
- HEPA filters should be replaced every 2-3 months, while the fine steel filter can last over 1 year with proper cleaning.

## WASHABLE FINE STEEL FILTER



The image shows a green and white handheld device with a circular nozzle. To its right is a chart detailing the LED indicator's status during charging and working. The chart is divided into two sections: 'When Charging' and 'When Working'. Under 'When Charging', there are two indicators: one with a green light labeled 'Fully charged' and one with a red light labeled 'Charging'. Under 'When Working', there are three indicators: one with a green light labeled 'Level 1' and '9000 pa', one with a yellow light labeled 'Level 2' and '13000 pa', and one with a red light labeled 'Level 3' and '17000 pa'. A horizontal bar at the bottom of the chart transitions from green to yellow to red, corresponding to the three levels.

When Charging	When Working
Fully charged (Green)	Level 1 (Green) - 9000 pa
Charging (Red)	Level 2 (Yellow) - 13000 pa
	Level 3 (Red) - 17000 pa

Image: The washable fine steel filter being rinsed under running water for cleaning.

## 8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Device does not turn on	Battery is depleted	Charge the device fully (refer to Section 4).
Low suction/blowing power	Dust cup is full	Empty the dust cup.
	Filters are clogged	Clean or replace the filters (refer to Section 7).
	Nozzle/hose is blocked	Remove any obstructions from the nozzle or air pathways.
Device stops unexpectedly	Battery is low	Recharge the device.
	Overheating protection activated	Turn off the device and allow it to cool down for 30 minutes before resuming use.

## 9. SPECIFICATIONS

Feature	Detail
Brand	Saker
Model Name	HL133
Special Features	Bag, Cordless, Foldable, Lightweight
Filter Type	HEPA Filter, Fine Steel Filter
Power Source	Battery Powered
Capacity	0.2 Liters
Recommended Uses	Car, Home, Office
Noise Level	80 Decibels
Wattage	100 watts
Battery Charge Time	3 Hours
Runtime	40 minutes
Item Weight	13.6 ounces
Item Dimensions (L x W x H)	6.5" x 2.75" x 8.5"

## 10. SAFETY INFORMATION

---

- Keep the device away from water and moisture.
- Do not use the device to vacuum liquids, hot ashes, or sharp objects.
- Ensure filters are dry before reinstallation to prevent damage to the motor.
- Do not block the air intake or outlet during operation.
- Keep out of reach of children.
- Use only the provided charging cable and compatible power sources.
- Do not attempt to disassemble or repair the device yourself. Contact customer support for assistance.

## 11. WARRANTY AND SUPPORT

---

Saker products are manufactured to high-quality standards. For warranty information, technical support, or to inquire about replacement parts, please refer to the contact information provided on the product packaging or visit the official Saker website.

Please retain your proof of purchase for warranty claims.