



FERRET CFR300A WiFi Repeater User Guide

[Home](#) » [FERRET](#) » FERRET CFR300A WiFi Repeater User Guide 

Contents

- [1 WiFi Repeater CFR300A](#)
- [2 Setting Up Your Ferret Repeater](#)
- [3 Specifications](#)
- [4 Warranty](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

WiFi Repeater CFR300A



Ferret Repeater Configuration Guide


Configuration is required to pair your Ferret Repeater with your Ferret Sweeps camera prior to use.

FERRET Repeater CFR300A
Version 2.1 © 2020
The Cable Ferret Company Limited
The Cable Ferret Company Pty Ltd
Cable Ferret, Inc.


Setting Up Your Ferret Repeater

Note: Configuration is required to pair your Ferret Repeater with your Ferret Sweeps camera prior to use.

1. Plug the Repeater into a power bank to power up. WiFi indicator LED will be green.
2. Open the WiFi Settings on your smartphone or tablet and select the “Ferret-Repeater-XXXX” SSID.

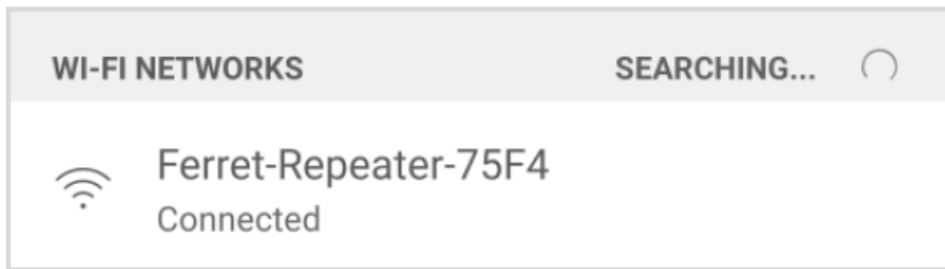

3. Once connected, open an internet browser on your smartphone or tablet and enter the address 10.10.10.254. The Ferret Repeater Configuration Page will open up.

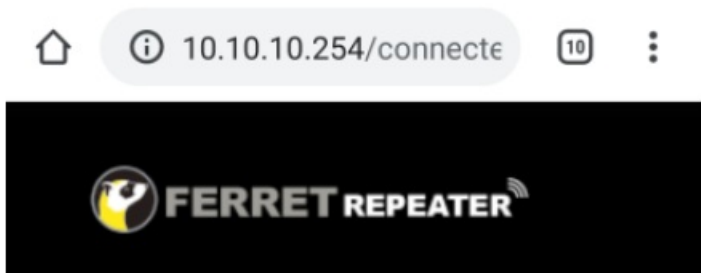


4. Switch on your Ferret Sweeps camera.
5. Scroll to the bottom of the page and tap SCAN NOW.




6. Find your Ferret camera's SSID “Ferret-WiFi-XXXX” and tap “Select”. In this example, the Ferret camera's SSID is “Ferret-WiFi-DC21”




7. Tap “Next”

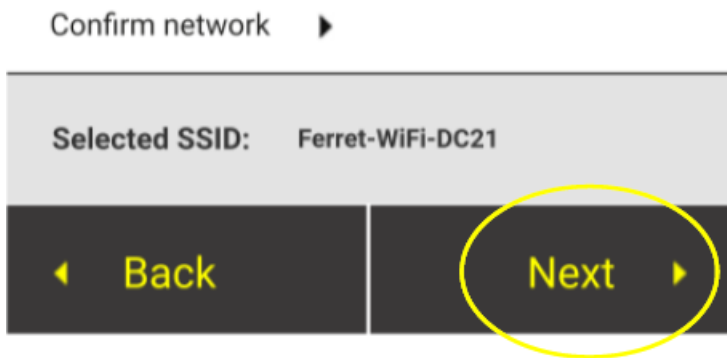

8. Tap "Confirm"

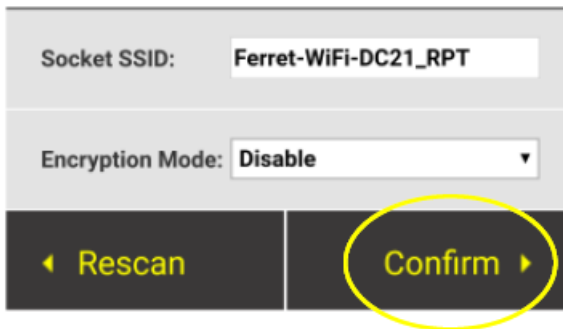

9. Wait for the "Configuration Successful" message.

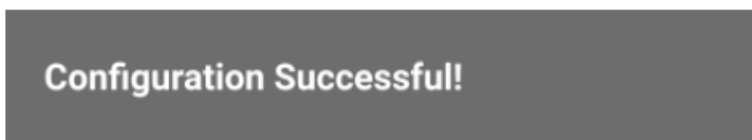

10. After approximately 30 seconds, the green WiFi Indication LED will turn Blue confirming your Ferret Repeater has been configured.

11. Go to the WiFi Settings on your phone, select the SSID "Ferret-WiFi-XXXX_RPT ". Check that you're connecting to the SSID with "RPT" in the name (for the Ferret Repeater). Ferret-WiFi-DC21_RPT in the example below.



12. Open your Ferret WiFi App. Your phone is now connected to your Ferret camera via the Ferret Repeater.

NOTE: The Ferret Repeater will only need to be reconfigured if you need it to connect to a different Ferret camera.

Specifications


Model: CFR300A
Dimensions: 85 x 25 x 9mm
Frequency: 2.4GHz
Signal Rate: Up to 300Mbps
Transmit Power: < 18dBm
Operating Voltage: 5V DC

Warranty

Your FERRET Repeater comes with a 12-month replacement warranty. In the unlikely event that your FERRET Repeater develops a fault within 12 months of purchase, please email support@cableferret.com or return it your place of purchase with proof of purchase.

Failure due to physical damage, misuse, neglect, improper use or moisture is not covered. The Ferret Repeater has no user serviceable parts inside. Disassembly will void the warranty.

Documents / Resources

 <p>Ferret Repeater Configuration Guide</p> <p>Configuration is required to pair your Ferret Repeater with your Ferret Savings camera prior to use.</p>	<p>FERRET CFR300A WiFi Repeater [pdf] User Guide</p> <p>CFR300A, WiFi Repeater</p>
--	--