



## FIAMMA F45s 260 Awning for VW Ts5 and T6 with Deep Black Case Instruction Manual

[Home](#) » [FIAMMA](#) » FIAMMA F45s 260 Awning for VW Ts5 and T6 with Deep Black Case Instruction Manual 













Awnings  
Installation and usage instructions


**FIAMMA F45s  
PSA**

### Contents

- [1 FIAMMA STORE](#)
- [2 Package contents](#)
- [3 MAINTENANCE INSTRUCTIONS](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

**FIAMMA STORE**

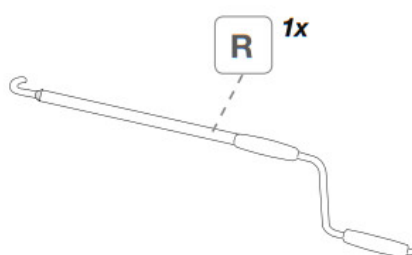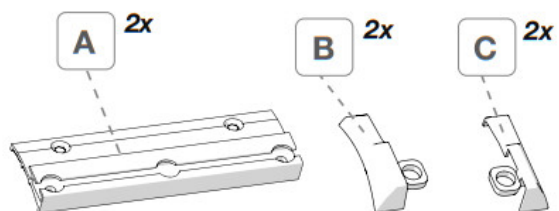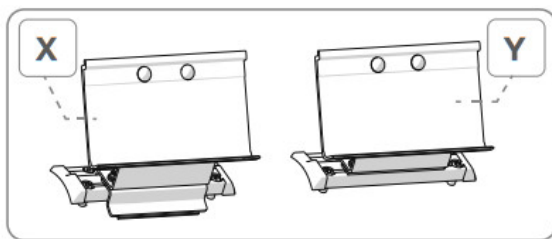

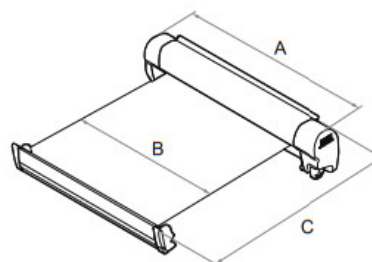

	A	B	
F45s 260 PSA	263 cm	247 cm	200 cm

**F45s 260 PSA – Polar White 06280F01R**

**F45s 260 PSA – Deep Black 06759F01R**

## Package contents

Check that nothing has been damaged or deformed during transport.


In the event of doubts or questions concerning the installation, use, or limitations of the product, contact the dealer. We recommend that the installation is carried out by qualified personnel and in compliance with current local regulations.

## INSTALLATION ON FIXING KIT


The awnings are to be fixed on the brackets so that the words “SUPPORT” on the awning correspond to the brackets: this condition is necessary and indispensable for the two brackets situated at the ends (which are located on the fixing point of the arms on the case-box). It is important, but not indispensable, for the central bracket/s as it/they provide/s only mounting support. The brackets must always be well aligned reciprocally to avoid later problems; in case they are not, they must be properly shimmed using the spacers to ensure the alignment.

The installation of the awning can occur only when the brackets are perfectly aligned to the roof of the vehicle.

F45 - 260

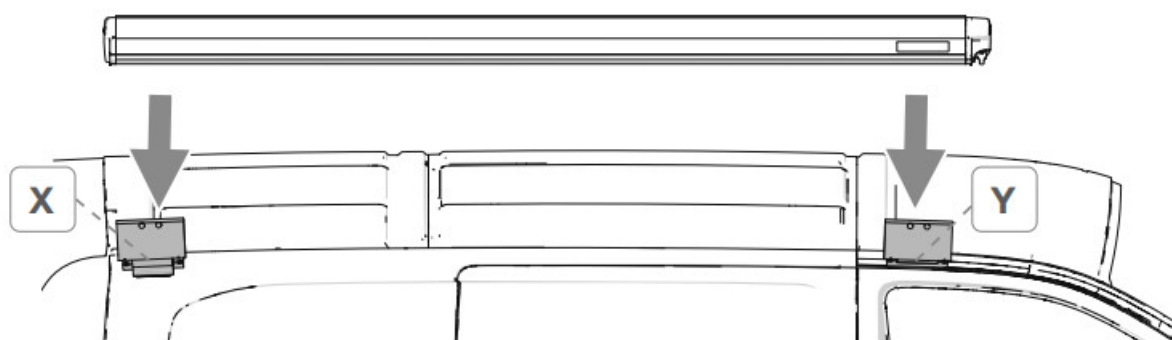


Lift roof


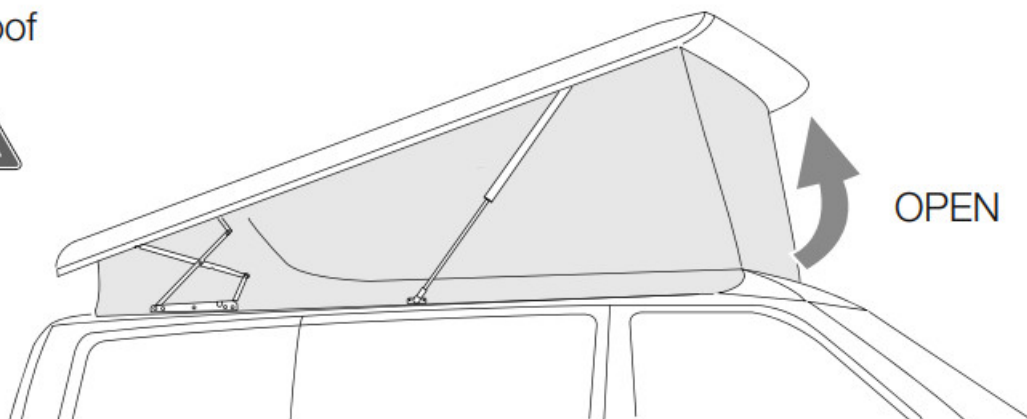


Cut the cardboard figures attachment



2

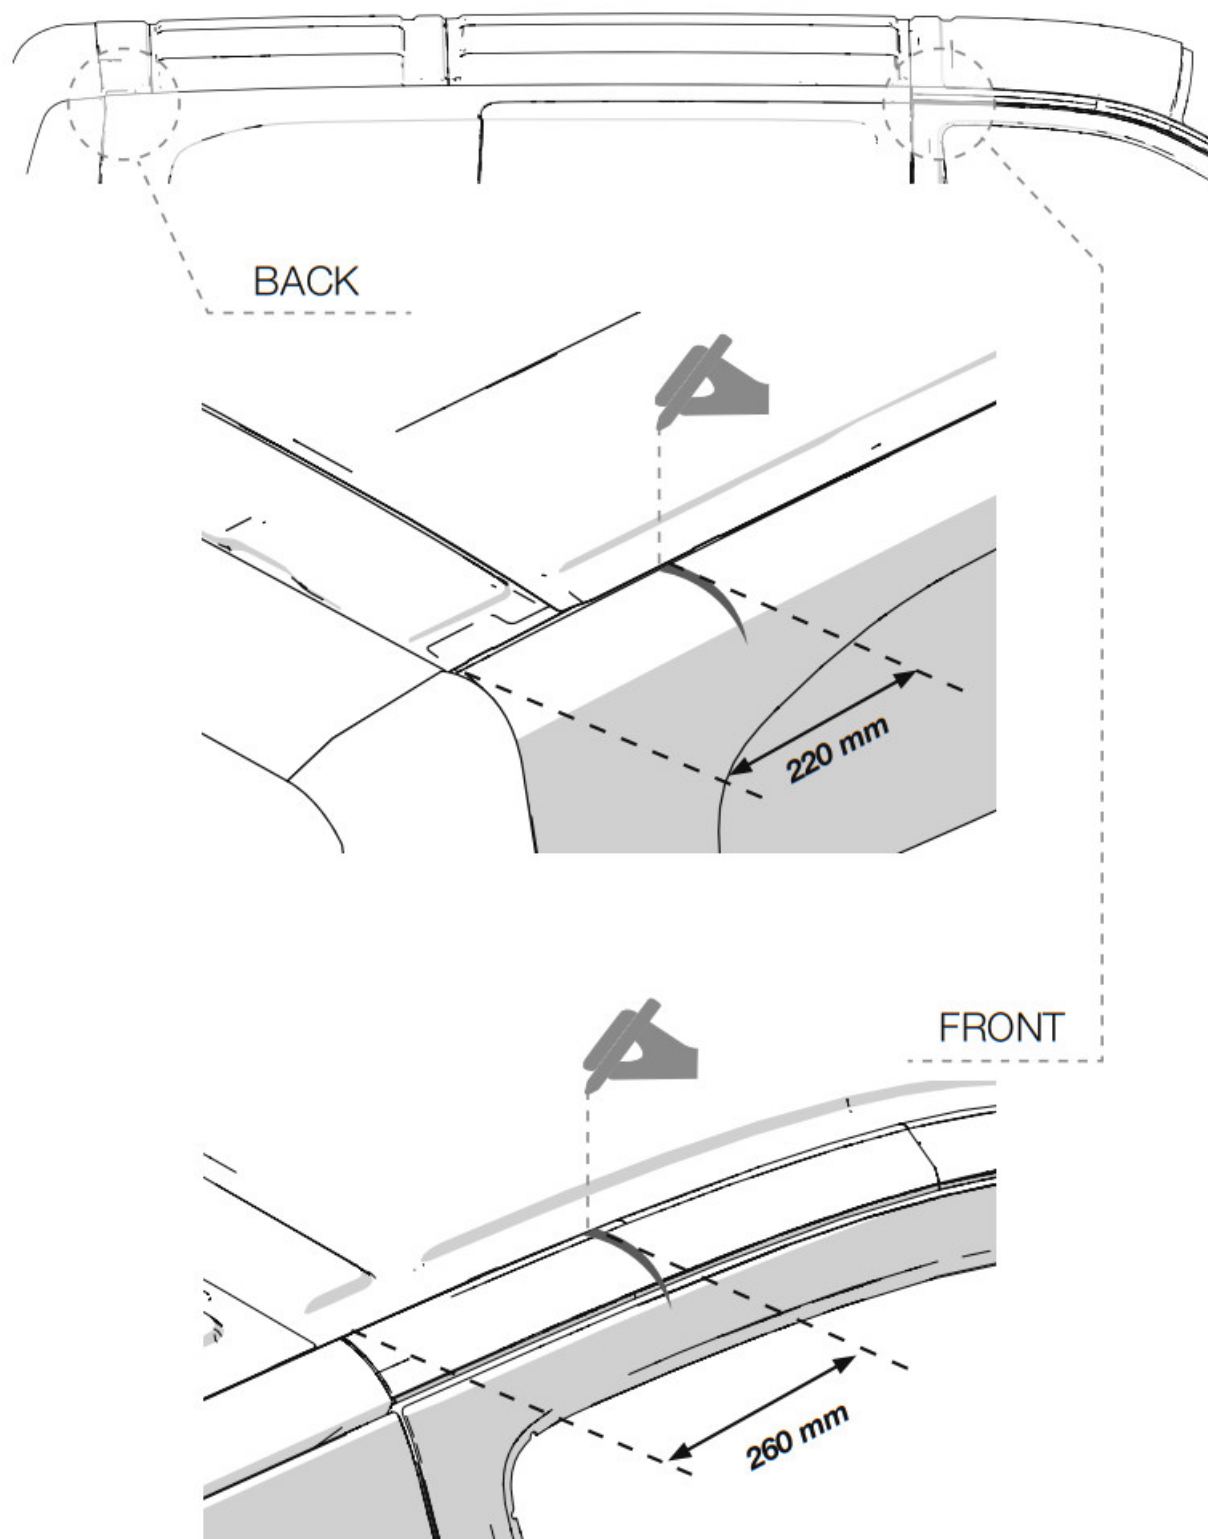

3

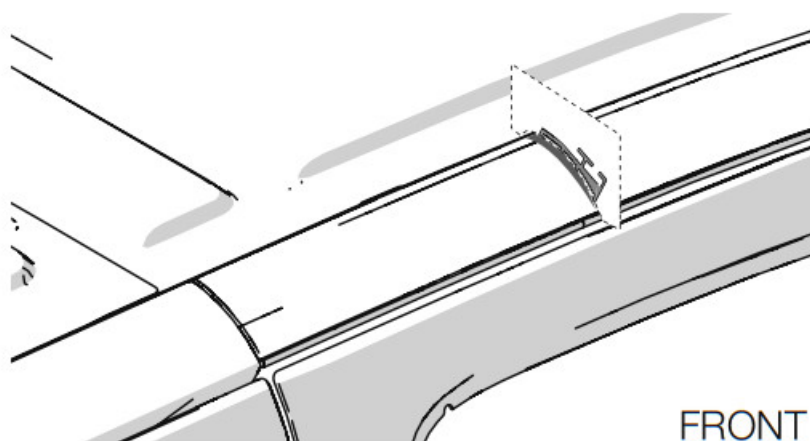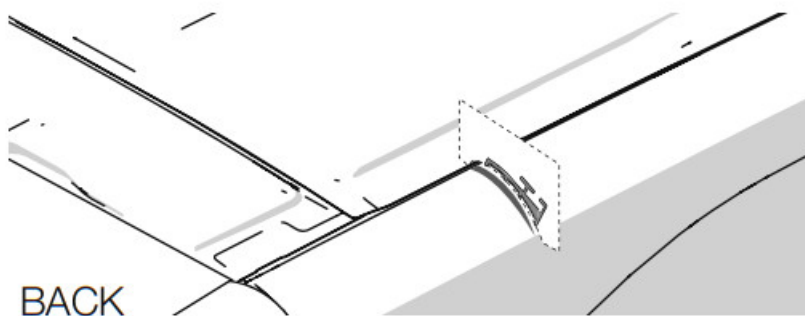


4




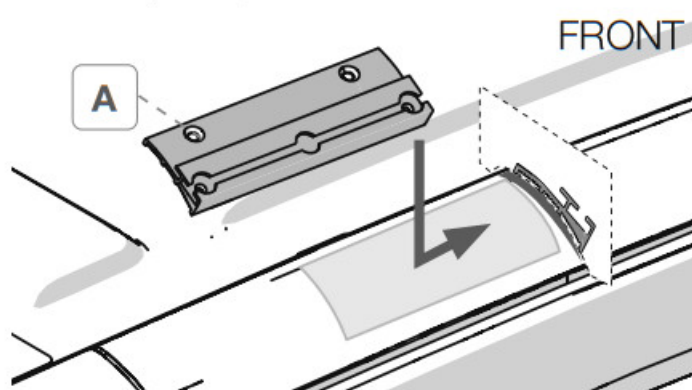
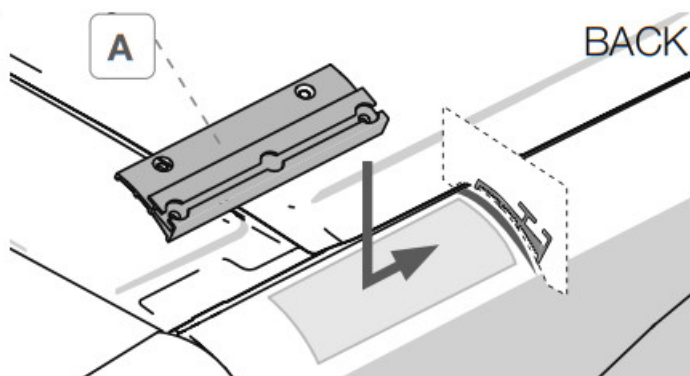


5



BACK

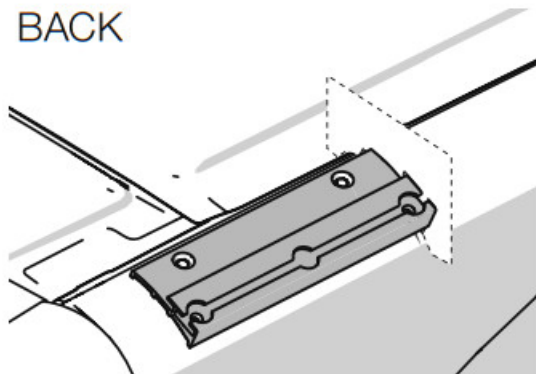

FRONT

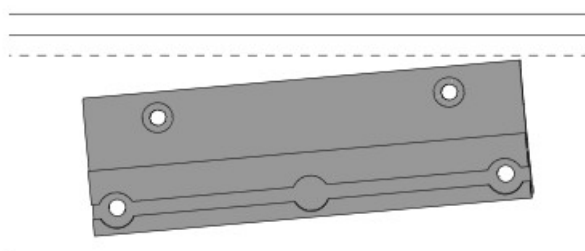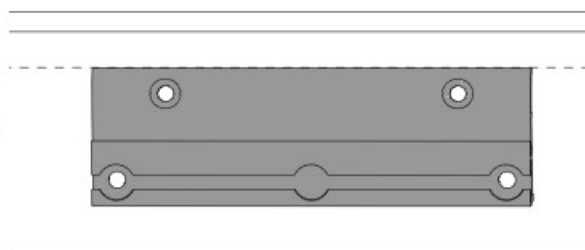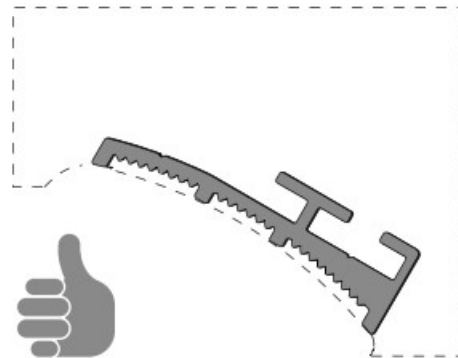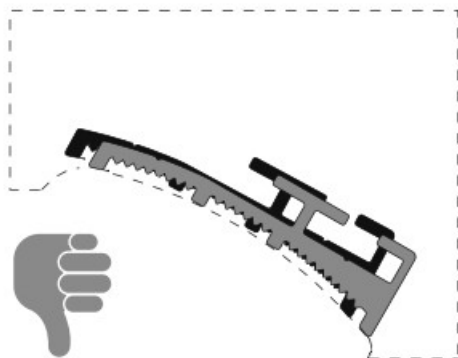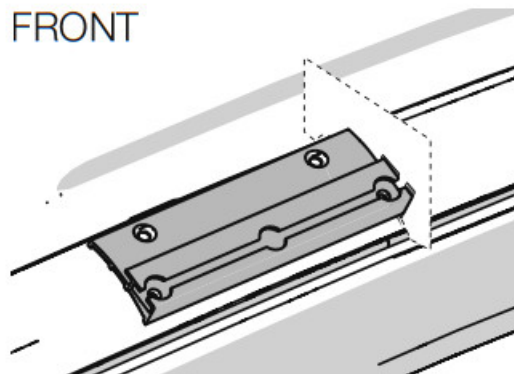


6

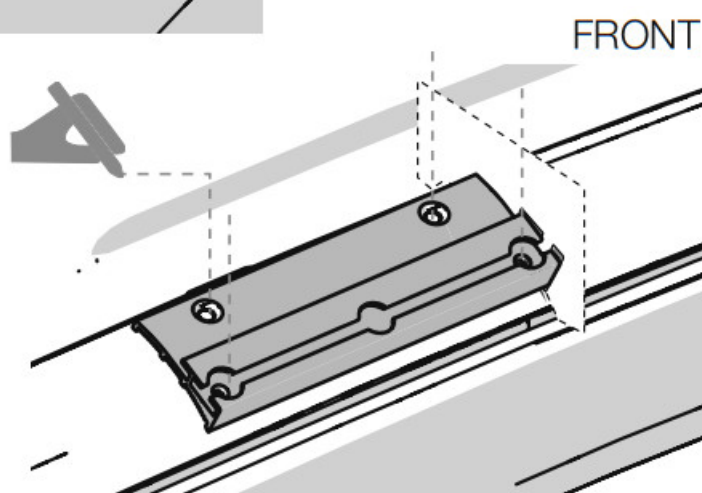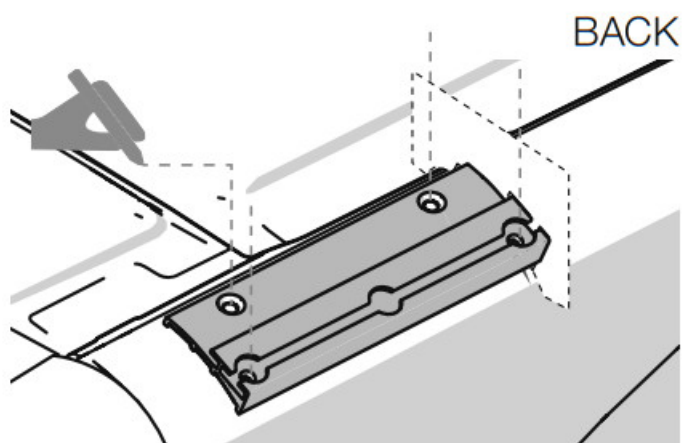


7

BACK AND FRONT


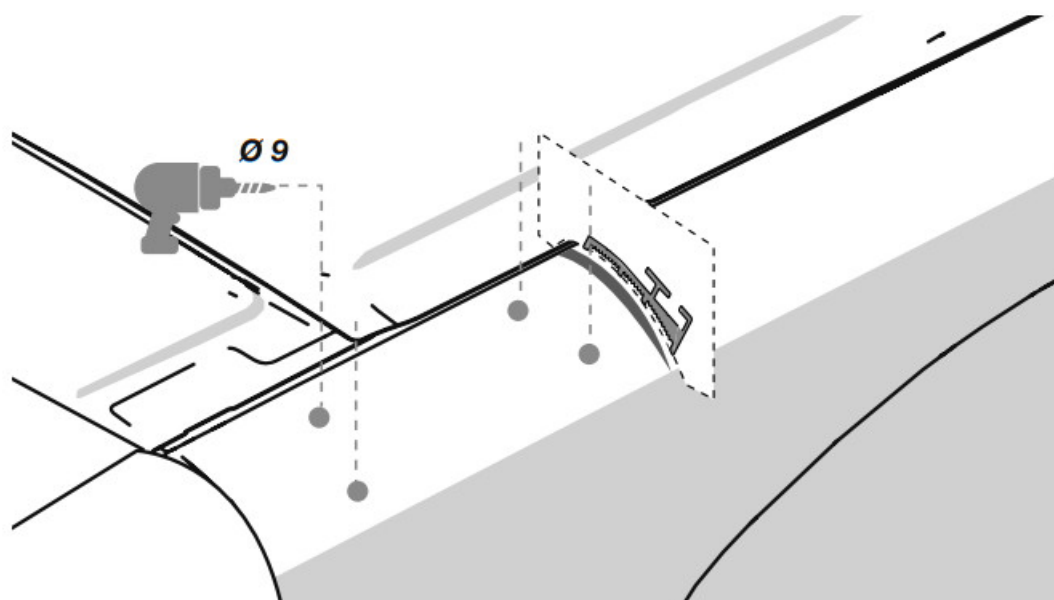




## 8 BACK AND FRONT

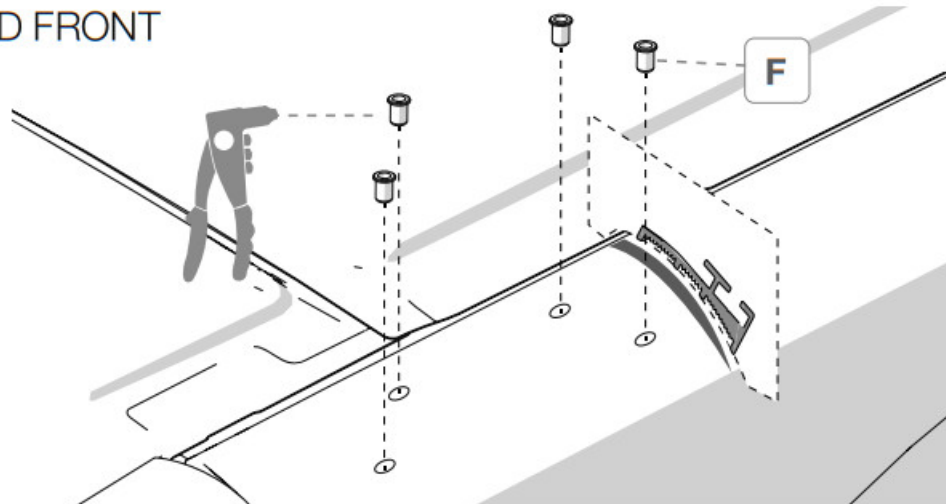


## 9 BACK AND FRONT

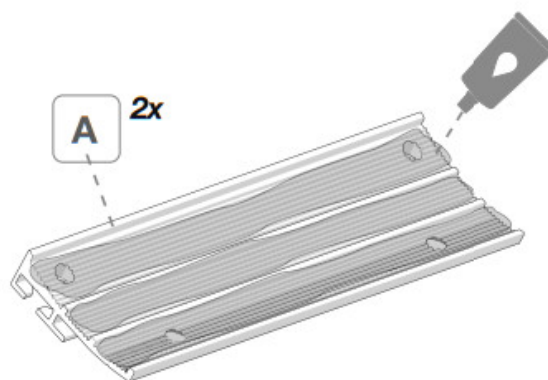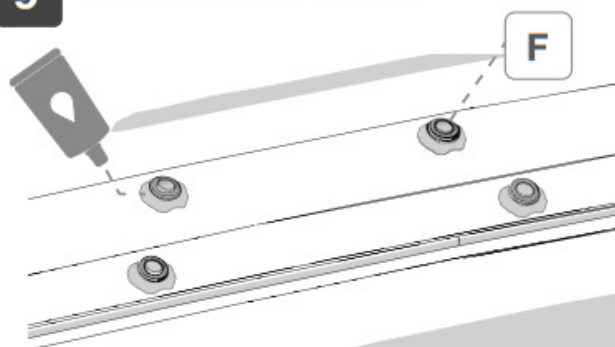


Primer +  
SIKA 252 or Terostat MS 937

**Important:** use of SIKA 252 (or Terostat MS 937) adhesive is essential for fi xing the bracket (brackets).


**10** BACK AND FRONT

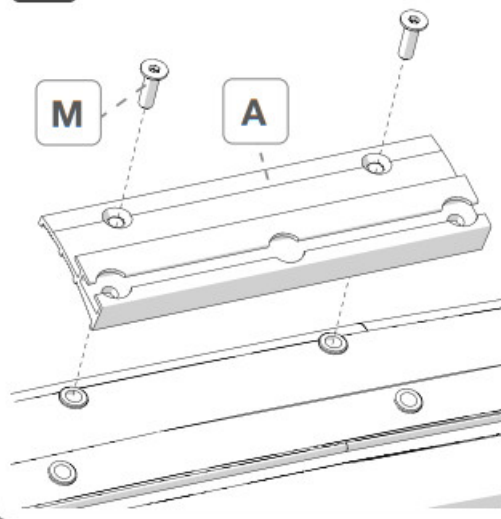


**11** BACK AND FRONT

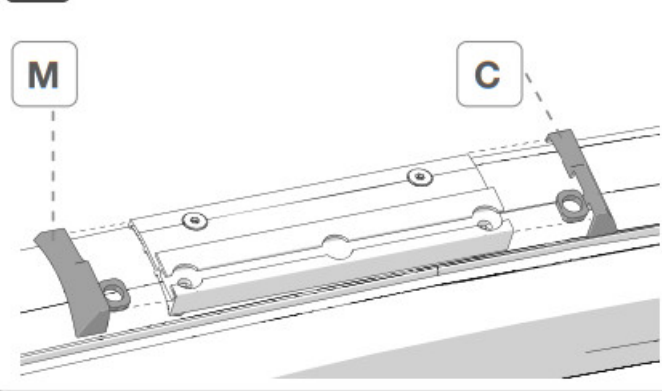


**12** BACK AND FRONT

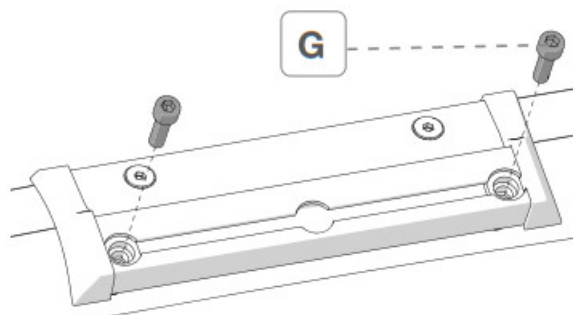


**13** BACK AND FRONT

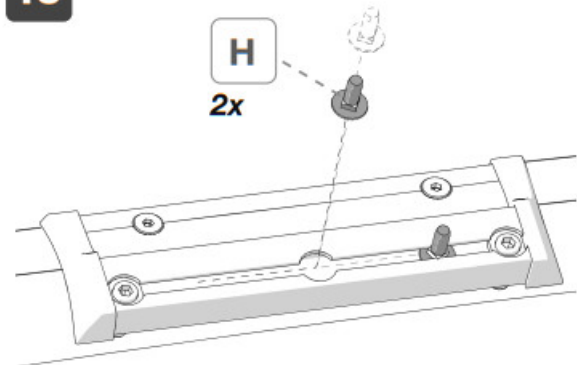


**14**

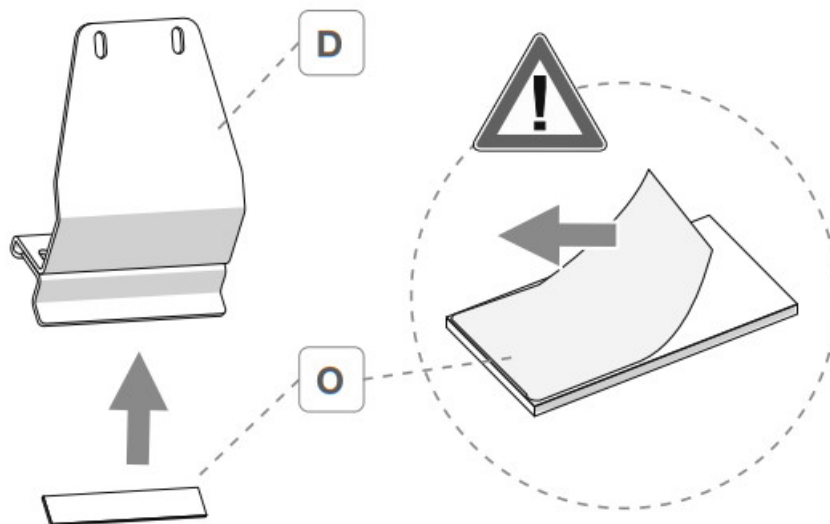

**15**

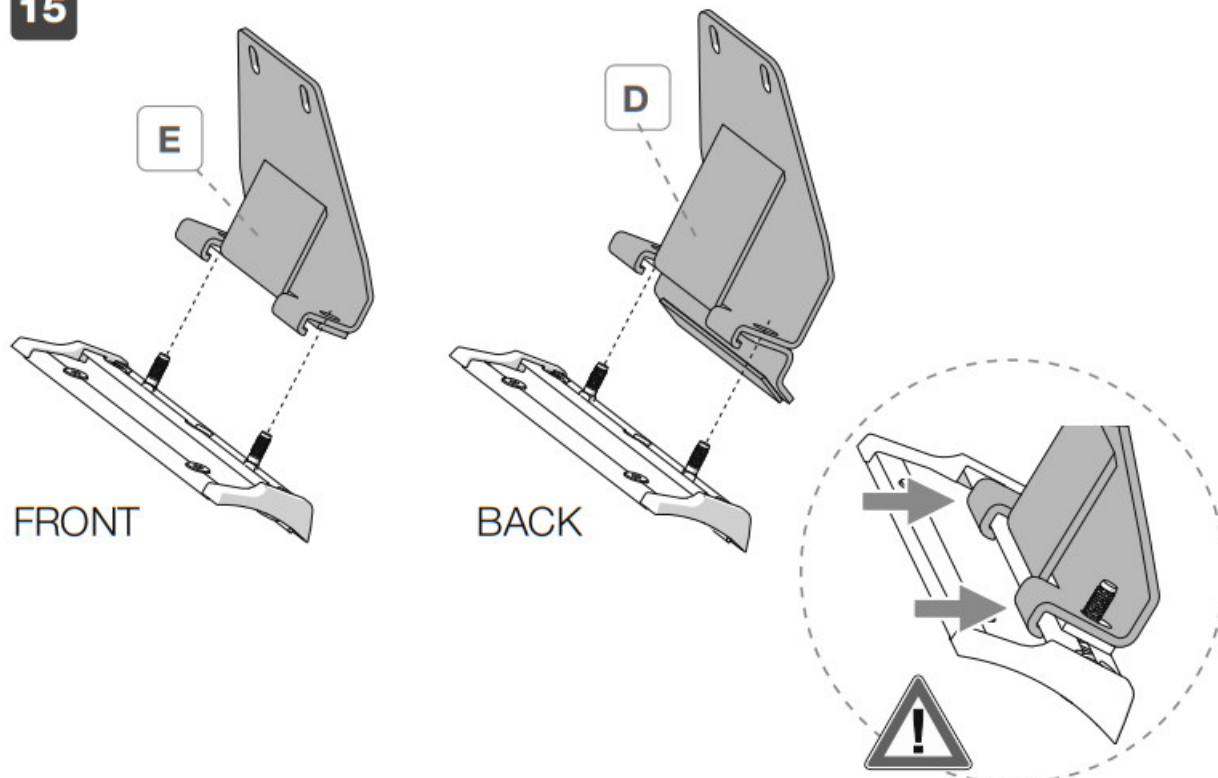


**16** BACK AND FRONT

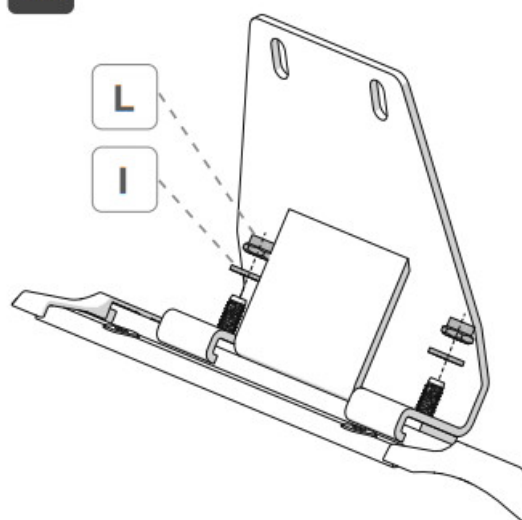


Do not completely tighten the screws

## 17 BACK AND FRONT

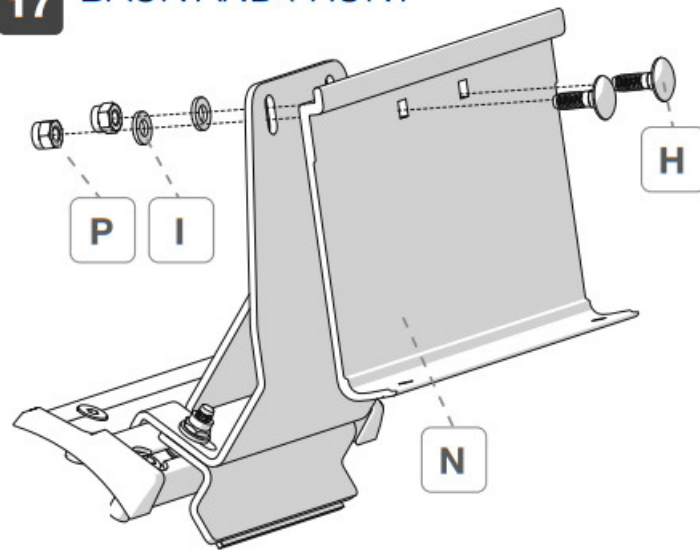



Do not completely tighten the screws

18

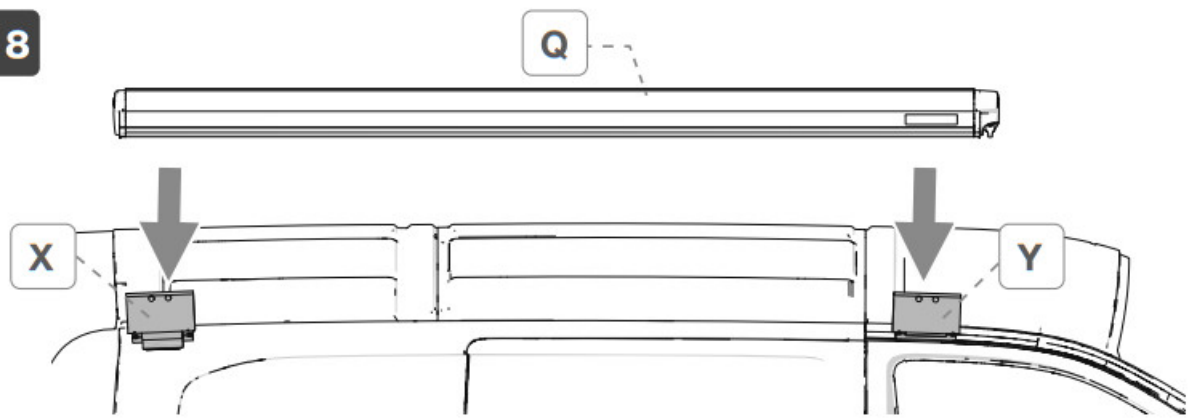

19

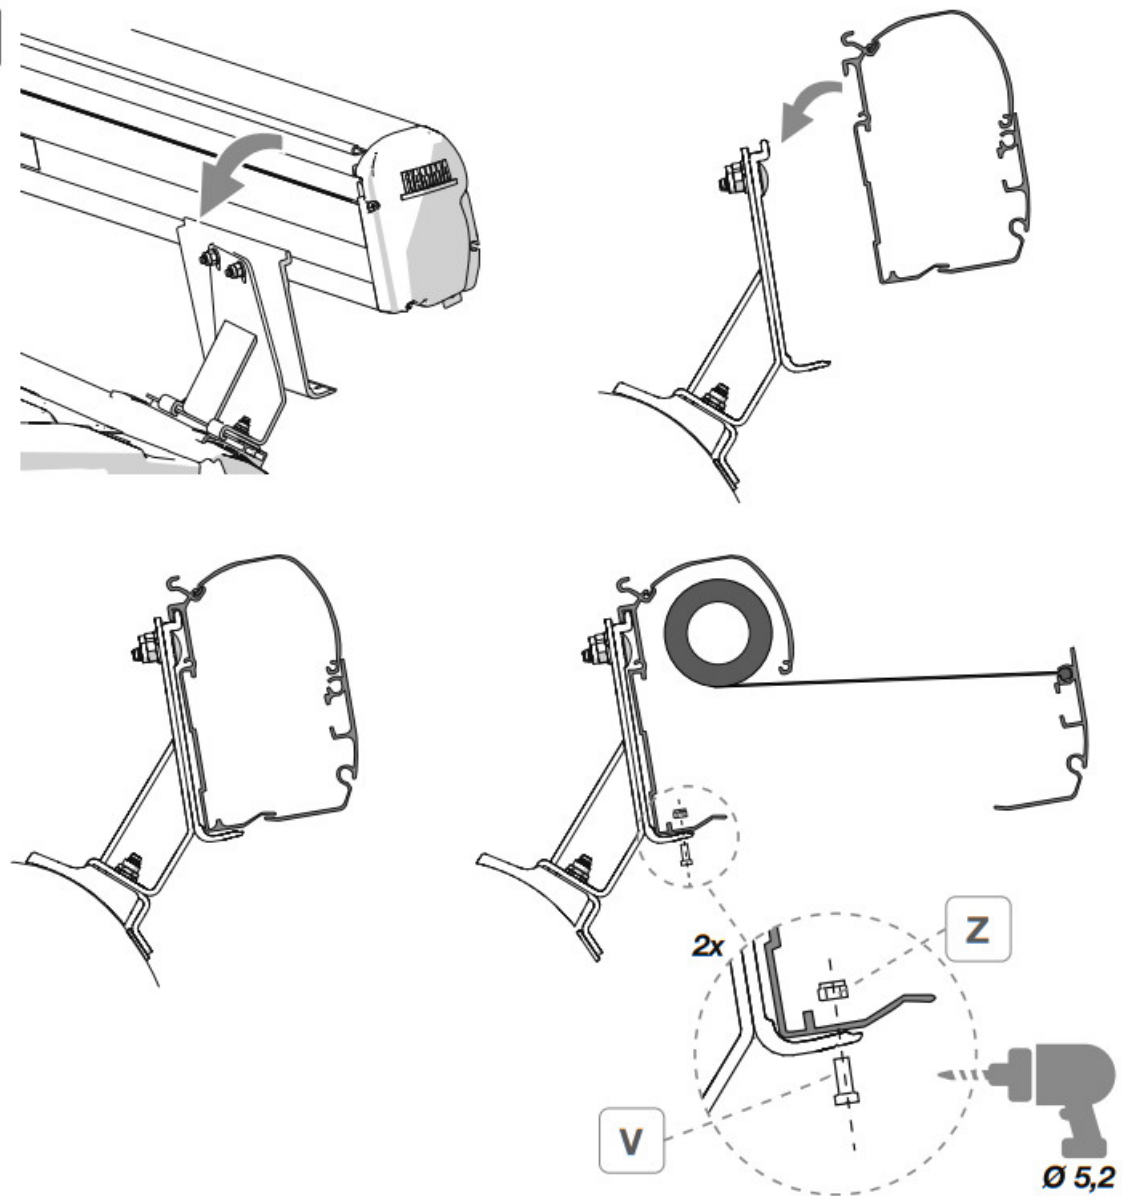

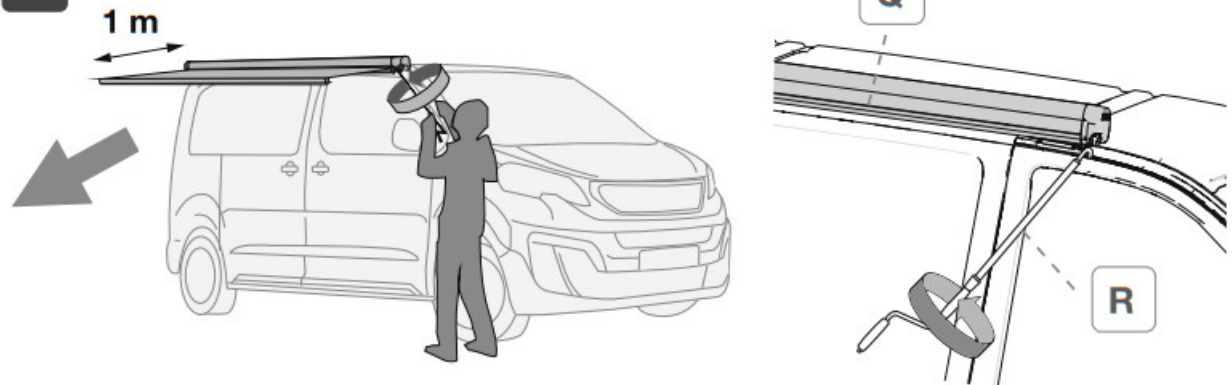**20**









In order to avoid unnecessary strain on the awning as well as on the vehicle side, we suggest to take out the legs at about 1 m from the opening.

Grasp the leg near its hinge-joint and pull it toward you. Unhook and lower the leg.



After unrolling the awning completely, adjust the legs at the chosen height.

To avoid the awning being lifted up by an unexpected gust of wind, it is necessary to secure the legs to the ground with the provided hooks. For safety's sake, we strongly advise you to anchor the awning with the Tie-Down (Optional).



The foot for leg has been created to prevent its incorrect placing inside the housing of the lead bar during the closing phase of the awning. With an incorrect placing of the foot the lead bar will not close completely; therefore it is advisable to always place it properly into the housing with the base turned to the lead bar (1).

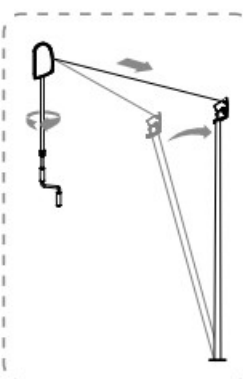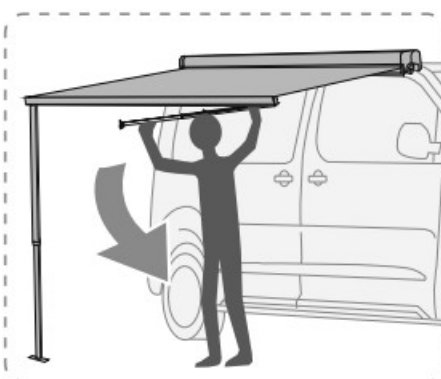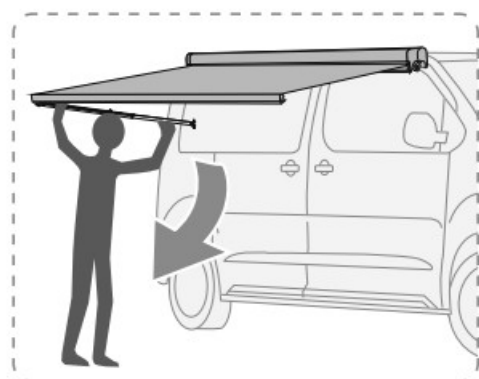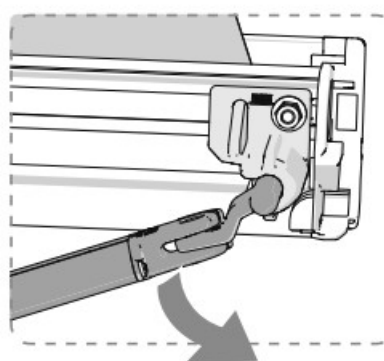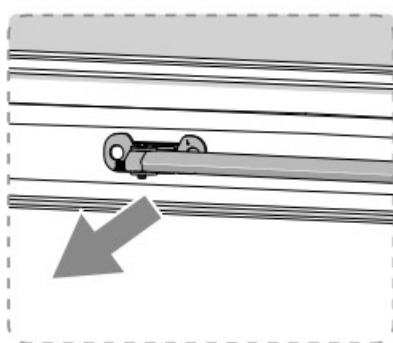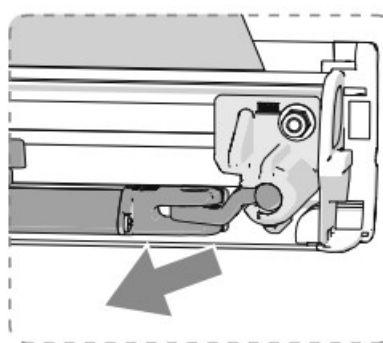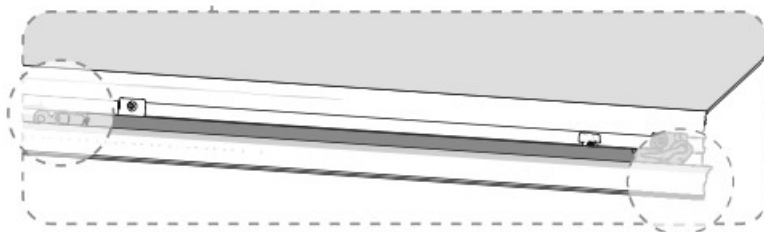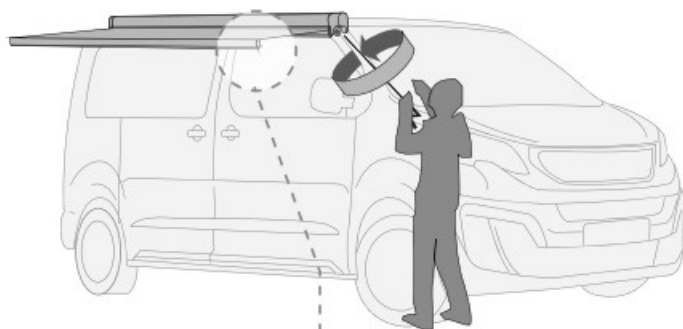



22

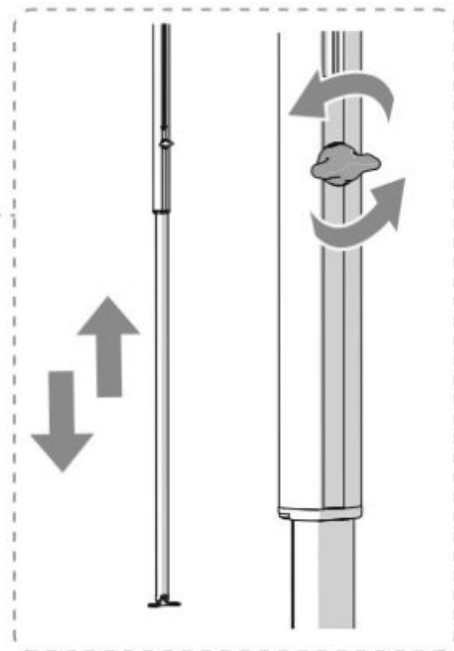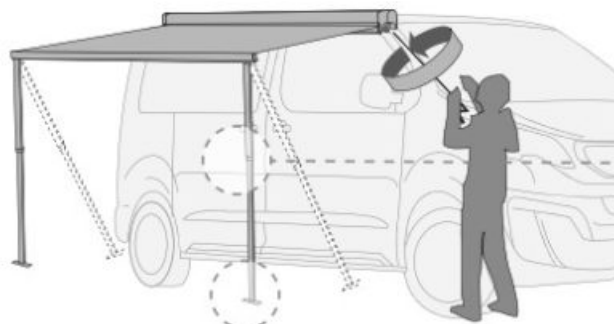

23

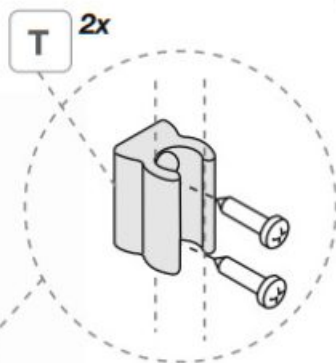
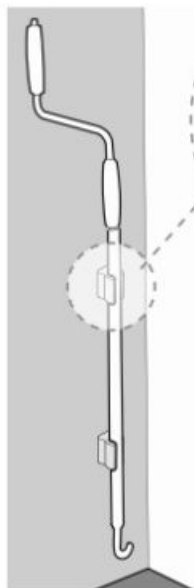


24

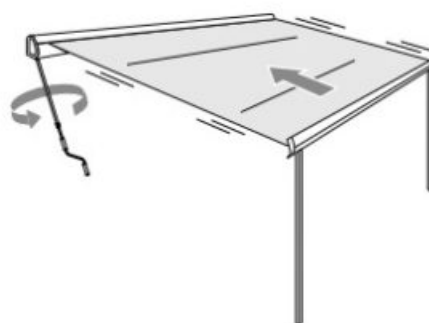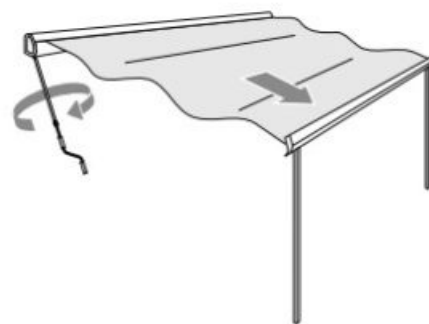


Before leaving, make sure the awning is correctly closed. The awning is open. The red flag is visible. When the awning is completely closed, the red flag is no longer visible.



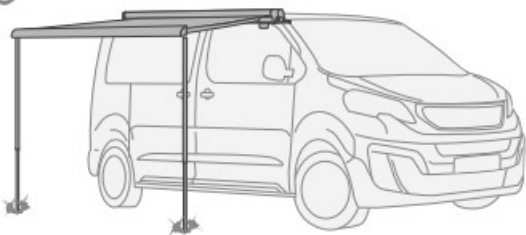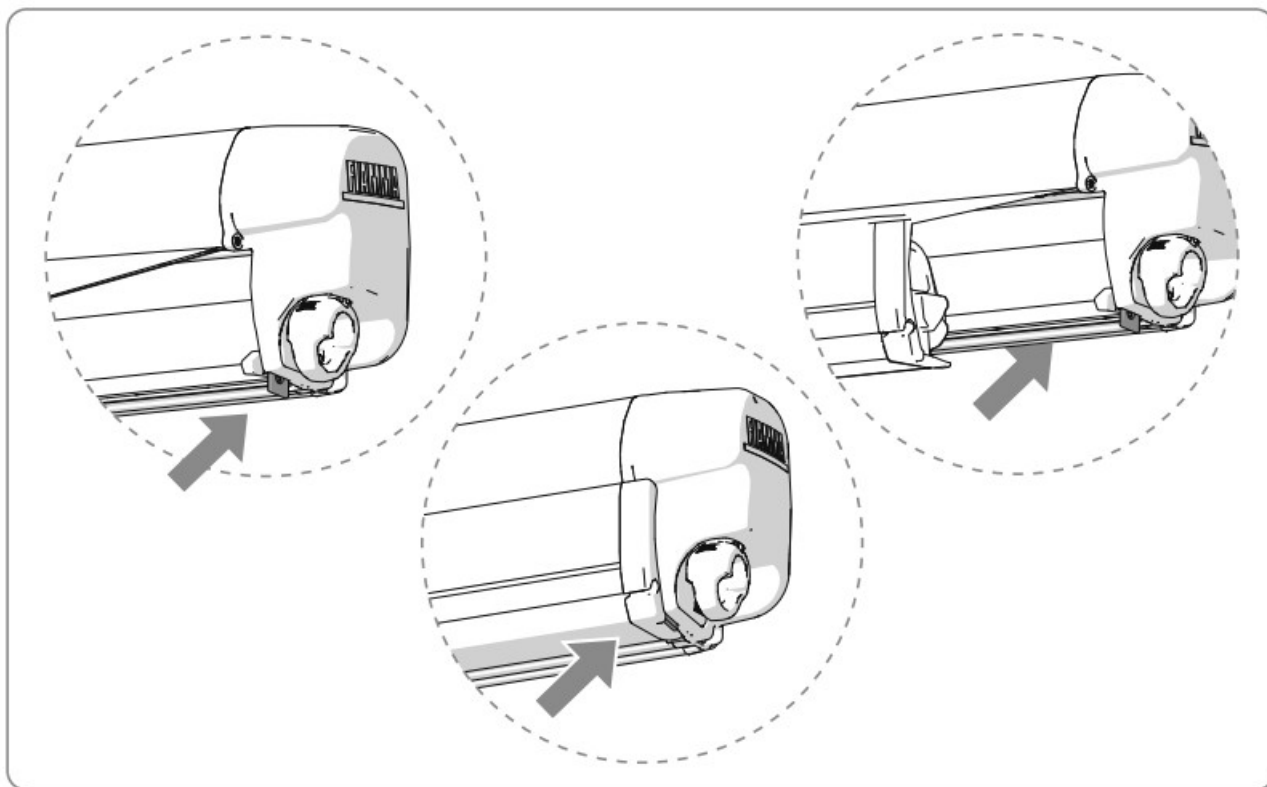

We remind you that the awning is a sun protection, so please close your awning in case of rain, wind or snow. Otherwise, please take the following precautions: lower one side of your awning, so that water can flow away.

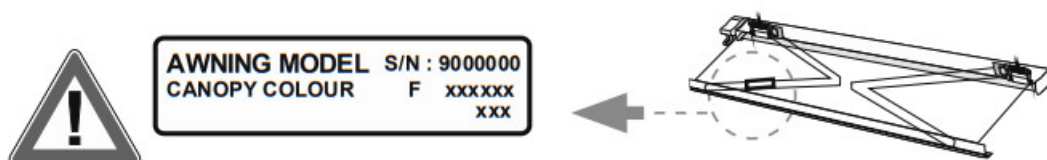

In case of problems please contact your local dealer indicating the data on the nameplate. Consult our website for the spare parts drawing.



 <p><b>Deep Black</b></p>	 <p><b>Polar White</b></p>	 <p><b>Titanium</b></p>
<p><a href="https://www.fiamma.it/en/spare-parts-fiammastore/winch-awnings-for-wall-installation-2007488025/f45s-deep-black-190-450-en">https://www.fiamma.it/en/spare-parts-fiammastore/winch-awnings-for-wall-installation-2007488025/f45s-deep-black-190-450-en</a></p>	<p><a href="https://www.fiamma.it/en/spare-parts-fiammastore/winch-awnings-for-wall-installation-2007488025/f45-s-polar-white-250-450-en">https://www.fiamma.it/en/spare-parts-fiammastore/winch-awnings-for-wall-installation-2007488025/f45-s-polar-white-250-450-en</a></p>	<p><a href="https://www.fiamma.it/en/spare-parts-fiammastore/winch-awnings-for-wall-installation-2007488025/f45s-titanium-190-450-en">https://www.fiamma.it/en/spare-parts-fiammastore/winch-awnings-for-wall-installation-2007488025/f45s-titanium-190-450-en</a></p>

Read the following instructions and warnings carefully; failure to observe these installation and usage instructions as well as the laws for driving in the relevant country may cause severe harm or damage for which the

manufacturer declines all responsibility.  
Keep the original packaging to be used in case of return

Before installation, ensure compatibility with the vehicle on which the product must be installed.  
Checking that the wall/roof is sufficiently solid and suitable for guaranteeing the resistance of the anchoring points is always mandatory. If not, grip and compliance with the maximum load indicated in the instructions are not guaranteed and it will be necessary to reinforce it.

Before leaving, make sure the awning is correctly closed. A damaged fabric does not allow the awning to perfectly roll in. Never use the awning with a damaged canopy.

Periodically check the fixing status of the brackets, especially after having traveled the first Kms from the assembly and every time before and after long journeys, making sure that they have not moved and that the tightening is correct.

Always comply with speed limits and the Highway Code. The speed should always be suitable to traffic conditions and towed load.

The awnings are produced with a high quality standard, but some of the characteristics of the materials (as little imperfections on paint or linearity of aluminium profiles; little marks or light deformations of plastic parts), which could be interpreted as defects, derive from the materials and from the specific work processes, and these characteristics occur even though Fiamma uses advanced and innovative machine production techniques.

Apart from our strict quality controls, we also have our fabrics continuously controlled by independent institutes to ensure that the fabric is tear resistant, they can hold the weight of water, the colours don't fade and it is resistant against atmospheric agents.

To guarantee a perfect quality, the fabrics are waxed or laminated several times.

During this operation, single coloured pigments could move and thus create small bright spots in the material, which are only irregularities that are technically inevitable to avoid, but do not compromise the impermeability of the fabric.

## **MAINTENANCE INSTRUCTIONS**

Make sure that your awning is completely dry and clean before closing it.

The remaining humidity could cause stains. If however you have no choice but closing the awning when it is still wet, make sure to open it for drying within 12 hours maximum. Most of the dirt is superficial and can be removed with clean water and a cloth or a brush. If the fabric is very dirty, add some light cleaning detergent (Marseille soap).


Be aware never to use any aggressive chemical substances and never to clean the fabric with a high pressure machine. We recommend not to use the awning at a temperature below 0°C.

You are advised not to wash the outer covering of the awning with an aggressive product that could alter the surface finishes or the materials.

If the awning is more than 100 mm out of the vehicle shape, the presence of the awning must be recorded in the vehicle's registration documents (DIN 75303 – 2019).

### Patio-Mat

Item No. 07681-01-

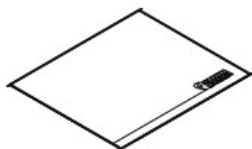

### Rafter Pro

Item No. 98655A002



### Magic Rafter

Item No. 98655-716



### Rafter LED

Item No. 98655-850




### Rain Caps

Item No. 06893-01-



### Rain Guard Van

Item No. 98655-947



### Kit Repair Plus


Item No. 98655-466



### Tie Down

Item No. 98655-128

Item No. 98655-129



### Tie Down S

Item No. 98655-567

Item No. 98655-133



### Kit Awning Arms LED

Item No. 98655-849

### Kit Awning LED

Item No. 98655-471

### LED Awning Case

Item No. 98655-914



### Kit Awning Pegs

Item No. 98655-880




### Kit Awning Plate

Item No. 98655-724



### Blocker

Item No. 07972-04-



### Blocker Pro

Item No. 07971-12-

Item No. 07971A01-




### Sun View XL

Item No. 08184-01

Item No. 08184-02-


### Shade Sun View

Item No. 07758-01-



### Side W Pro


Item No. 07973A01-



### Privacy Room Light Van



### Privacy Ultra Light Van



## Warranty Fiamma

In case of defects with regards to materials and manufacturing, the customer is entitled to the warranty in accordance with local laws and regulations of the country in which the product was purchased.



<https://www.fiamma.it/en/>

[fiamma.com](https://www.fiamma.com)

Fiamma S.p.A. – Italy  
Via San Rocco, 56  
21010 Cardano al Campo (VA)  
[fiamma.com](https://www.fiamma.com)

All rights reserved.

Fiamma S.p.A.

reserves the right to modify at any time, without notice, prices, materials, specifications and models or to cease production of any model.

## Documents / Resources

		<p><a href="#">FIAMMA F45s 260 Awning for VW Ts5 and T6 with Deep Black Case</a> [pdf] Instruction Manual F45s, PSA, 260 Awning for VW Ts5 and T6 with Deep Black Case</p>
--	--	--