

Alaga Alaga Security Camera

Alaga 3K Pet Camera User Manual

Model: Alaga Security Camera

1. INTRODUCTION

Thank you for choosing the Alaga 3K Pet Camera. This device is designed to provide comprehensive monitoring of your pets and home with advanced features such as 3K Ultra HD resolution, 360° pan/tilt, AI motion detection, two-way audio, and night vision. This manual will guide you through the setup, operation, and maintenance of your new camera.

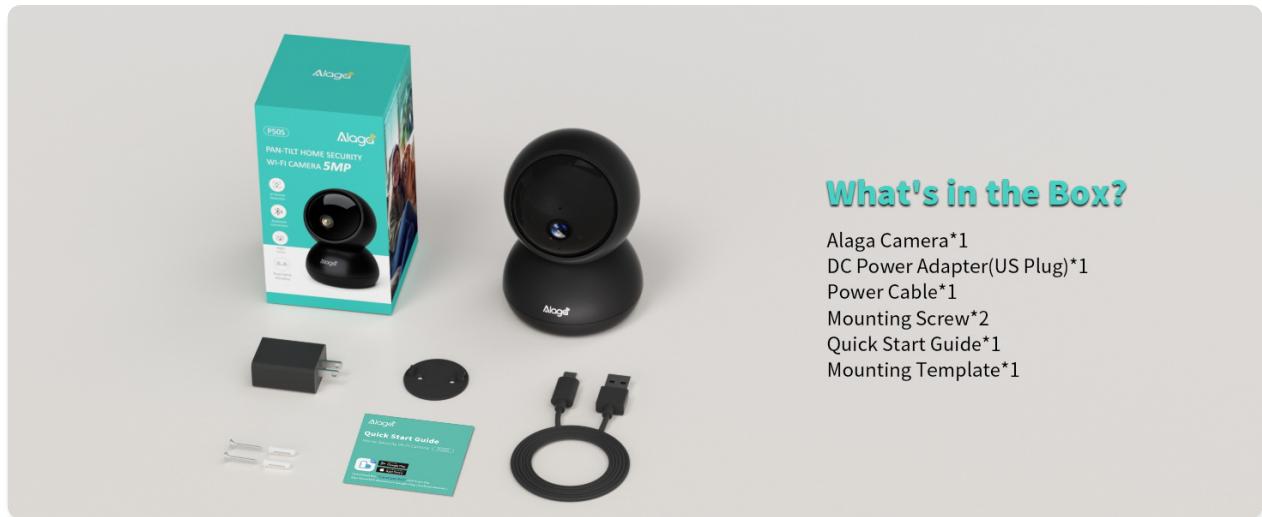


Image 1.1: Alaga 3K Pet Camera and its mobile app interface.

2. WHAT'S IN THE Box

Please check the package contents to ensure all items are present:

- 1x Alaga Indoor Security Camera
- 1x Power Adapter
- 1x User Guide
- 1x Mounting Screws and Plate



What's in the Box?

Alaga Camera*1
DC Power Adapter(US Plug)*1
Power Cable*1
Mounting Screw*2
Quick Start Guide*1
Mounting Template*1

Image 2.1: All components included in the Alaga 3K Pet Camera package.

Unboxing Video

Your browser does not support the video tag.

Video 2.1: This video demonstrates the unboxing process of the Alaga 3K Pet Camera, showing all included items.

3. SETUP

3.1 Power On

1. Connect the USB Type-C cable to the camera's power port.
2. Plug the power adapter into a standard electrical outlet.
3. The camera will perform a self-check, indicated by its movement and a voice prompt.

3.2 App Installation & Device Pairing

1. Download the "CareCamPro" app from your smartphone's app store (iOS or Android).
2. Register a new account or log in if you already have one.
3. In the app, tap the "+" icon to add a new device.
4. Select "Pair by QR Code" or allow the app to search for devices via Bluetooth.
5. Follow the on-screen instructions to connect the camera to your 2.4GHz or 5GHz Wi-Fi network.
6. Scan the QR code displayed on your phone with the camera lens. You will hear a prompt when scanning is complete.
7. Once connected, you can customize the camera name and usage scenario (e.g., "Pets", "Housekeeping").

App Installation Guide Video

Your browser does not support the video tag.

Video 3.1: This video provides a step-by-step guide on how to install the CareCamPro app and pair your Alaga 3K Pet Camera.

3.3 Placement & Mounting

The compact design of the Alaga 3K Pet Camera allows for versatile placement. You can place it on any flat surface or mount it on a ceiling or wall using the included mounting screws and plate.

Place the Alaga indoor security camera on any flat surface or mount it on the wall

Keep an eye on your pet from any angle you prefer!



Image 3.1: Examples of placing the Alaga 3K Pet Camera on a flat surface or mounting it on a wall.

4. OPERATING INSTRUCTIONS

4.1 Live View & Pan/Tilt Control

Access the live feed from your camera through the CareCamPro app. Use the on-screen controls to remotely rotate the camera 345° horizontally and 62° vertically, providing a 360° full view of your space.



Image 4.1: The Alaga 3K Pet Camera offers 360° panoramic monitoring.

4.2 Two-Way Audio

The camera features a two-way intercom. Tap the microphone icon in the app to speak through the camera's speaker, allowing you to communicate with pets or family members remotely.


Two-Way Audio Control Mischief in Real Time



Image 4.2: Two-way audio allows real-time communication through the camera.

4.3 AI Motion Detection & Alerts

Equipped with AI algorithms, the camera accurately detects movements, people, and pets. When activity is detected, you will receive instant push notifications on your phone. The camera can also track suspicious activity.

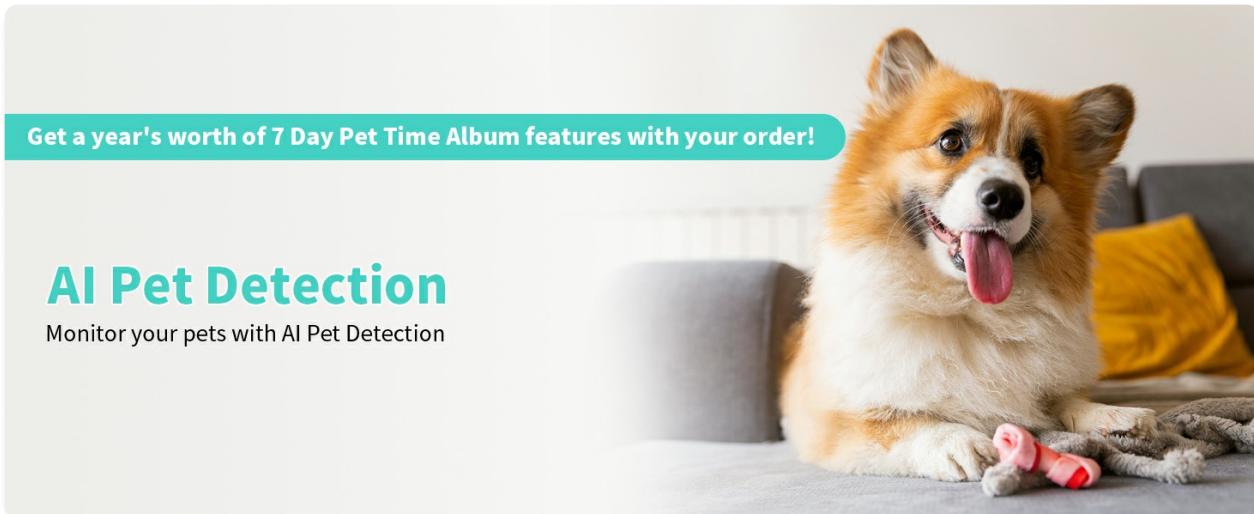

AI Pet Detection

Monitor your pets with AI Pet Detection

Image 4.3: AI Pet Detection monitors your pets and sends alerts.

4.4 Night Vision

The camera features advanced night vision with infrared LED lights, providing clear footage up to 30 feet even in complete darkness. This ensures 24/7 protection and monitoring.

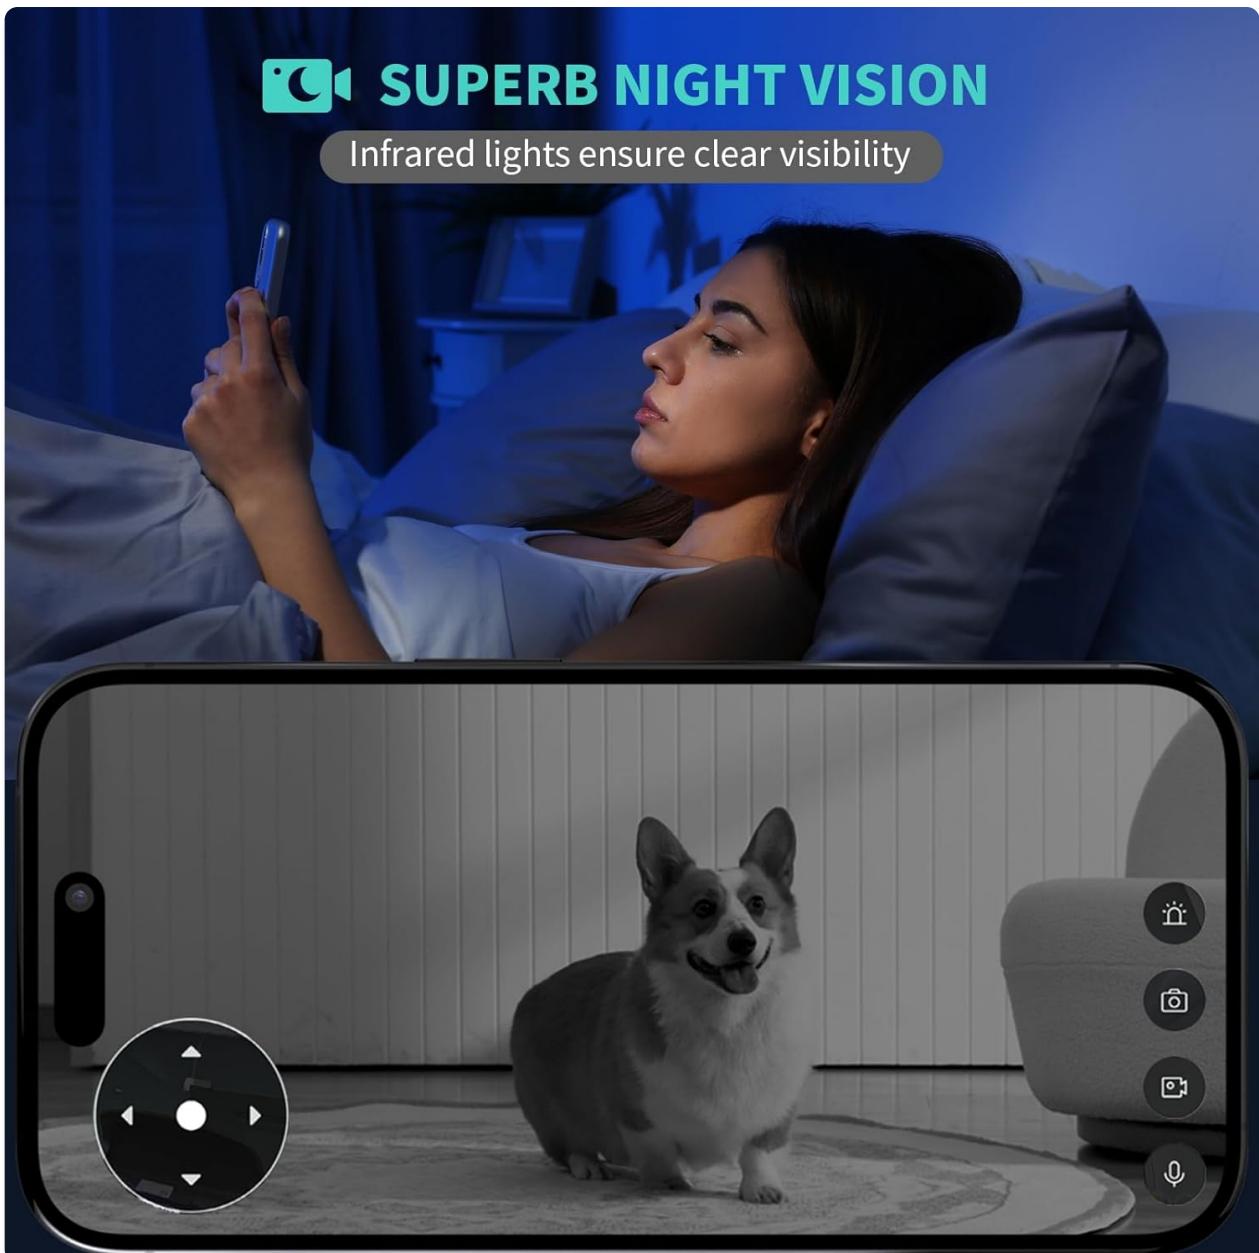


Image 4.4: Superb night vision ensures clear visibility in low-light conditions.

4.5 Time-Lapse with Moments Album

The camera automatically captures snapshots throughout the day and creates a short time-lapse video. This feature allows you to easily review your pet's activities or home changes in minutes.



Capture Moment of Pet

Use Time Pet Album to capture your pets' journey from day to night and automatically generate a video of the pets.

- Free 1 year trial of Time Pet Album.
- It could recognise many pets such as dog, cat, small mammals - rabbit, ferret, horse, bird and reptile.

Image 4.5: The Time Pet Album captures and compiles moments of your pets.

4.6 Storage Options

Footage can be stored on a Class 10 microSD card (up to 128GB, not included) or via optional cloud storage. Cloud storage encrypts footage, keeping it safe even if the Micro SD card is lost or damaged.

4.7 Smart Home Integration

The Alaga 3K Pet Camera is compatible with Alexa and Google Assistant. You can view live footage on devices like Echo Show or Google Chromecast using simple voice commands.

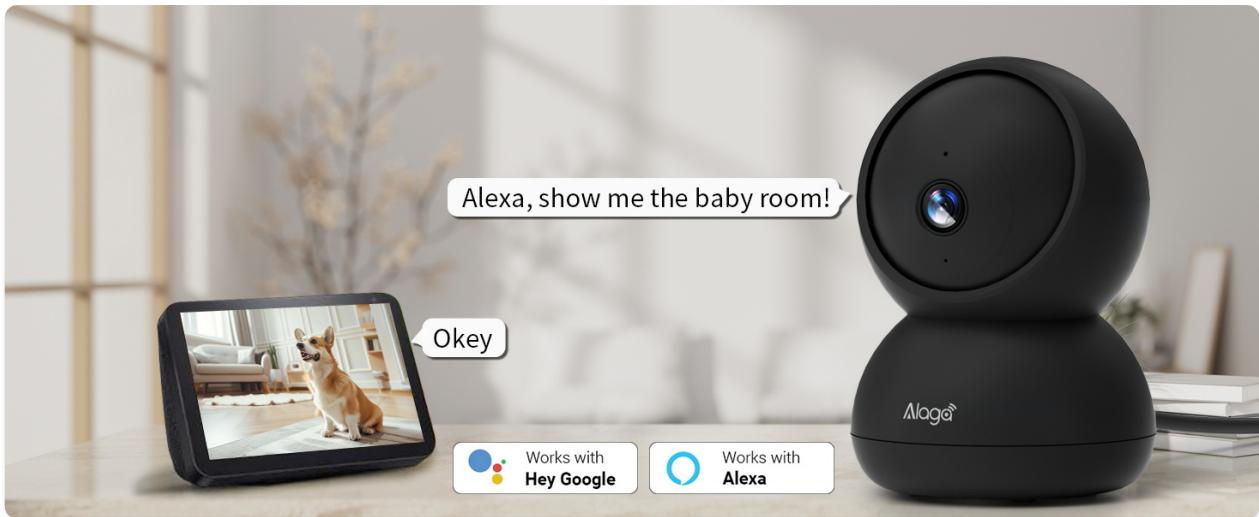


Image 4.6: Seamless integration with Alexa and Google Assistant for voice control.

Product Overview Video

Your browser does not support the video tag.

Video 4.1: This video provides a general overview of the Alaga 3K Pet Camera's features and functionality, including live monitoring, two-way audio, and motion detection.

5. MAINTENANCE

5.1 Cleaning

To maintain optimal performance, regularly clean the camera lens with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials that could damage the lens or casing.

5.2 Firmware Updates

Ensure your camera's firmware is up to date by checking the CareCamPro app regularly. Firmware updates often include performance improvements, new features, and security enhancements.

5.3 Resetting the Camera

If you experience persistent issues, you may need to reset the camera. Refer to the detailed instructions in the included User Guide for the location of the reset button and the proper procedure.

6. TROUBLESHOOTING

- Camera not connecting to Wi-Fi:** Ensure your Wi-Fi network is 2.4GHz or 5GHz and that the password is correct. Move the camera closer to the router to improve signal strength.
- Poor image quality:** Check your internet connection speed. Ensure the camera lens is clean and free from obstructions. Adjust the video quality settings in the app if necessary.
- No motion detection alerts:** Verify that motion detection is enabled in the app settings and that the alert period is correctly configured. Check your phone's notification settings for the CareCamPro app.
- Two-way audio issues:** Ensure your phone's microphone is enabled for the app and that the camera's speaker is not obstructed. Check volume settings on both your phone and within the app.

7. SPECIFICATIONS

| Feature | Specification |
|--------------------------|--|
| Model Name | Alaga Security Camera |
| Indoor/Outdoor Usage | Indoor |
| Video Capture Resolution | 3K (2880x1620) |
| Connectivity Technology | Dual-Band Wi-Fi (2.4GHz & 5GHz), Bluetooth |
| Pan/Tilt Rotation | 345° Horizontal, 62° Vertical |
| Night Vision Range | Up to 30 Feet |
| Two-Way Audio | Yes |
| AI Motion Detection | Yes (People, Pets) |
| Storage Options | MicroSD Card (up to 128GB), Cloud Storage |
| Compatible Devices | Smartphone, Alexa, Google Assistant |
| Power Source | Corded Electric (USB Type-C) |
| Dimensions (L x W x H) | 3.15 x 4.45 x 3.15 inches |
| Item Weight | 0.36 Pounds (5.8 ounces) |

8. WARRANTY & SUPPORT

For warranty information and technical support, please refer to the contact details provided in the included User Guide or visit the official Alaga website. Our customer service team is available to assist you with any questions or issues you may encounter.

Related Documents - Alaga Security Camera

| | |
|---|--|
|  | <p>Alaga Home Security Wi-Fi Camera Quick Start Guide</p> <p>A quick start guide for the Alaga Home Security Wi-Fi Camera, covering setup, mounting, FAQs, and LED light status.</p> |
|  | <p>Alaga Home Security WiFi Camera S-CW2503C-H Model Statement</p> <p>Statement from Mega Multimedia AI LLC regarding the Alaga Home Security WiFi Camera, Model S-CW2503C-H, confirming that test data for this model represents derivative models S-CW2503C, CW2503C, P50, and P50S due to identical circuitry and PCB layout.</p> |

| | |
|---|--|
|  <p>NGTeco NG-C2100 Indoor Security Camera</p> <p>Product Description: The NGTeco NG-C2100 Indoor Security Camera is a compact and sleek device designed for indoor monitoring. It features a 1080P HD resolution, allowing for clear video capture. The camera is equipped with a 2.8mm lens, providing a wide-angle view of up to 110 degrees. It includes a built-in microphone and speaker, enabling two-way audio communication. The camera is also compatible with the NGTeco Home App, which allows users to view live feeds, receive motion detection alerts, and control the camera's pan, tilt, and zoom functions. The camera is powered by a built-in rechargeable battery and can be charged via a standard USB port.</p> <p>Features:</p> <ul style="list-style-type: none"> 1080P HD Resolution 2.8mm Lens (110° Wide-Angle View) Two-Way Audio Motion Detection Cloud Storage Easy Setup | <p><u>NGTeco NG-C2100 Indoor Security Camera: 1080P HD, Pan/Tilt, Night Vision</u></p> <p>Discover the NGTeco NG-C2100, a premium 1080P indoor security camera with pan & tilt, night vision, two-way audio, and motion tracking. Easily connect via the NGTeco Home App and control with Alexa or Google Assistant for smart home monitoring.</p> |
|  <p>IMILAB C21 Product Book & Reviewer's Guide</p> | <p><u>IMILAB C21 2.5K WiFi Plug-in Indoor Camera: Product Book & Reviewer's Guide</u></p> <p>Explore the IMILAB C21, a 2.5K WiFi indoor security camera offering 360° surveillance, two-way audio, AI motion detection, and flexible storage options. This guide details its features, specifications, and comparisons with other models.</p> |
|  <p>Galayou G2 Quick Installation Guide</p> | <p><u>Galayou G2 2K Indoor Security Camera Quick Installation Guide</u></p> <p>Step-by-step guide to install and set up your Galayou G2 2K Indoor Security Camera, including WiFi connection, app setup, and troubleshooting tips.</p> |
|  <p>Amorom AM-P1 Quick Start Guide</p> | <p><u>Amorom AM-P1 Indoor Security Camera Quick Start Guide</u></p> <p>A quick start guide for the Amorom AM-P1 indoor security camera, covering product setup, network configuration, installation, and frequently asked questions.</p> |