

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [LUUCCO](#) /

› [LUUCCO AirWave K2 Combo Wireless Microphone User Manual](#)

LUUCCO 1

LUUCCO AirWave K2 Combo Wireless Microphone User Manual

Model: K2 | Brand: LUUCCO

INTRODUCTION

Thank you for choosing the LUUCCO AirWave K2 Combo Wireless Microphone. This system is designed to provide high-quality audio recording for a variety of applications, including live streaming, YouTube recording, vlogging, and more. Its magnetic design offers versatile wearing options, and wide compatibility ensures seamless integration with iPhone, Android devices, and cameras. Please read this manual carefully to ensure proper use and maintenance of your device.

WHAT'S IN THE BOX

Verify that all components are present in your package:

- LUUCCO AirWave K2 Transmitters (TX)
- LUUCCO AirWave K2 Receiver (RX) (USB-C or Lightning, depending on model)
- Charging Case
- Charging Cable
- User Manual



Image: The complete LUUCCO AirWave K2 Combo Wireless Microphone kit, including transmitters, receiver, and charging case.



Image: A detailed view of the individual components of the LUUCCO AirWave K2 Combo, showing the charging case, receiver, and two transmitters.

SETUP GUIDE

1. Charging the Devices

Before first use, ensure both the transmitters (TX) and the charging case are fully charged.

1. Place the transmitters into the charging case.
2. Connect the charging case to a power source using the provided USB cable.
3. The digital display on the charging case will show the battery percentage.
4. A full charge typically takes less than 1.5 hours. The charging case provides over 1.5 full charges for the transmitters, offering up to 15 hours of total battery life.

Storage Charging Case, Digital Power Display

Worry-Free Battery Life

15 Hours
Battery Life

> 1.5 times
Full Charges

6 Hours
Working Time

< 1.5 Hours
Charging Time



Image: The LUUCCO AirWave K2 charging case displaying its digital power percentage, highlighting its long battery life and quick charging capabilities.

2. Connecting the Receiver

The receiver (RX) is plug-and-play. Simply connect it to your recording device.

1. **For Smartphones (iPhone/Android):** Plug the appropriate receiver (Lightning for iPhone, USB-C for Android) directly into your phone's charging port.
2. **For Cameras/Computers:** Use the 3.5mm jack receiver (if included with your specific model) or a compatible adapter to connect to your camera's microphone input or computer's audio input.

Wide Device Compatibility

With different receivers, the Luucco AirWave can work with different devices, such as cameras, iOS/Android smartphones, and tablets, computers.



Image: Demonstrates the wide compatibility of the LUUCCO AirWave K2, showing its receivers connected to an iPhone, Android phone, camera, and laptop.

3. Powering On Transmitters

Once the receiver is connected, take the transmitters out of the charging case. They will automatically power on and attempt to pair with the receiver.

1. The indicator light on the transmitter will blink while searching for a connection and turn solid when successfully paired.

OPERATING INSTRUCTIONS



1. Wearing the Transmitter

The LUUCCO AirWave K2 features a magnetic design for versatile wearing options:

- **Clip-on:** Use the integrated clip to attach the transmitter to clothing, such as a collar or lapel.
- **Magnetic Mounting:** The magnetic back allows it to be attached to any magnetic surface or used with a magnetic necklace (not included) for discreet placement.

Magnetic Versatility

The magnetic mounting system allows transmitters to be mounted, clipped, or attached anywhere easily, and is suitable for versatile stylish wearing options.

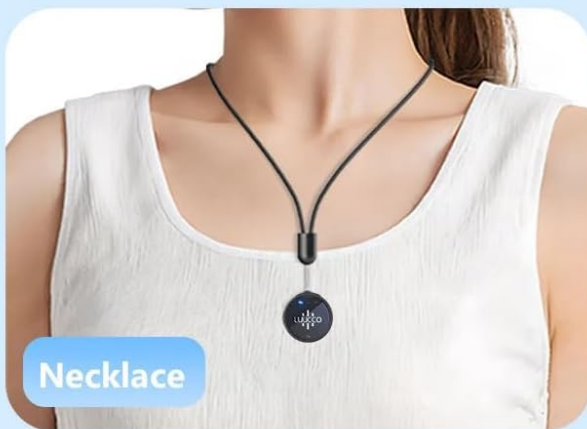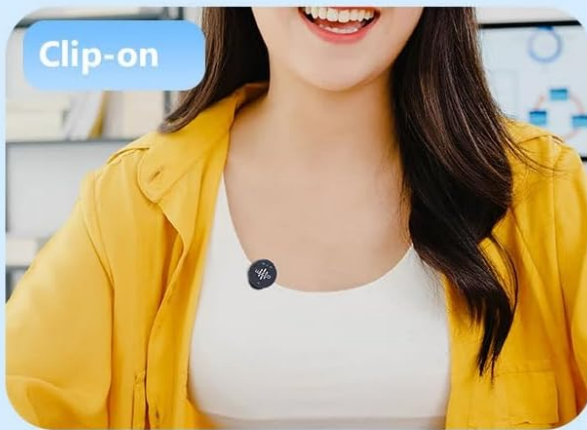

*The silicone magnet necklace is not included.

Image: Illustrates the magnetic versatility of the LUUCCO AirWave K2, showing it used as a clip-on microphone, attached magnetically to a hat, and worn with a magnetic necklace.

2. Recording Audio

Once the receiver is connected and transmitters are paired, you can begin recording.

1. Open your preferred recording application (e.g., camera app, voice recorder, live streaming app) on your smartphone or camera.
2. Ensure the external microphone input is selected if your device requires it.
3. Start recording. The microphone will capture clear audio from up to 100 meters (328 feet) away using 2.4GHz wireless transmission.

100m Wireless Transmission

2.4GHz spectrum to deliver a wireless transmission range of up to 100m (328').



Image: Depicts the 100m wireless transmission capability of the LUUCCO AirWave K2, showing a person recording outdoors with a smartphone and the microphone.

Any Scene, Whatever You Want

Easy to use two-subject for wireless mic solution, such as Interviews, Podcasts, Vlogs, and more.



Image: Shows various usage scenarios for the LUUCCO AirWave K2, including interviews, podcasts, vlogs, and fitness recording, demonstrating its versatility for different content creation needs.

3. Volume Control (if applicable)

Some models of the AirWave K2 may feature volume control directly on the transmitter. Refer to your specific product variant for details.

MAINTENANCE

To ensure the longevity and optimal performance of your LUUCCO AirWave K2, follow these maintenance guidelines:

- **Cleaning:** Wipe the devices with a soft, dry cloth. Do not use liquid cleaners or solvents.
- **Storage:** Store the microphone system in its charging case when not in use to protect it from dust and physical damage. Store in a cool, dry place.
- **Battery Care:** For long-term storage, charge the devices to about 50% every three months to preserve battery health.
- **Avoid Extreme Conditions:** Do not expose the devices to extreme temperatures, humidity, or direct sunlight.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No audio recording	Microphone not paired; Receiver not properly connected; Low battery; App settings.	Ensure transmitters are out of the case and indicator lights are solid. Verify receiver is fully inserted into your device's port. Charge transmitters and charging case. Check your recording app's settings to ensure external microphone input is selected.
Poor audio quality / Static	Interference; Distance too far; Obstructions.	Move away from other wireless devices or strong electromagnetic fields. Reduce the distance between transmitter and receiver. Ensure there are no major physical obstructions between the devices.
Transmitter not charging	Improper placement in case; Dirty charging contacts; Faulty cable/power source.	Ensure transmitters are correctly seated in the charging case. Clean charging contacts on both transmitters and case with a dry cotton swab. Try a different charging cable or power adapter.

SPECIFICATIONS

Feature	Detail
Brand	LUUCCO
Model	AirWave K2 Combo
Connectivity Technology	UHF (2.4GHz Wireless)
Wireless Transmission Range	Up to 100m (328ft)
Compatible Devices	iPhone, Android, Camera, Computer
Battery Life (Transmitters)	Approx. 6 hours (per charge)

Feature	Detail
Charging Case Battery Life	Provides >1.5 full charges (up to 15 hours total)
Charging Time	Less than 1.5 hours
Special Features	Magnetic Design, Digital Power Display (on case), Volume Control (on some models)
Item Weight	210 g
Package Dimensions	13.5 x 11.4 x 5.9 cm

WARRANTY AND SUPPORT

LUUCCO products are designed for reliability and performance. This product comes with a standard manufacturer's warranty against defects in materials and workmanship from the date of purchase.

- **Warranty Period:** Please refer to your purchase receipt or product packaging for specific warranty duration.
- **Warranty Claims:** For warranty service, please contact the retailer where you purchased the product or visit the official LUUCCO website for support contact information.
- **Extended Warranty:** Extended warranty options may be available from third-party providers. (e.g., 1-Year Extended Warranty by Salama Care, 2-Year Extended Warranty by Salama Care).

For technical support, troubleshooting assistance, or general inquiries, please contact LUUCCO customer service through their official channels.