

[Manuals.plus](#) /

> [IDEQY](#) /

> IDEQY Modern Crystal Chandelier (40-inch, Gold) Instruction Manual

IDEQY CF8006-100J

IDEQY Modern Crystal Chandelier (40-inch, Gold) Instruction Manual

Model: CF8006-100J

1. INTRODUCTION

This manual provides comprehensive instructions for the safe installation, operation, and maintenance of your IDEQY Modern Crystal Chandelier. Please read this manual thoroughly before installation and retain it for future reference. This chandelier features a gold stainless steel canopy, K9 clear crystals, and integrated dimmable LED lighting (3000-6000K).



Figure 1.1: IDEQUY Modern Crystal Chandelier (40-inch, Gold)

2. SAFETY INFORMATION

WARNING: To reduce the risk of electric shock, fire, or injury to persons, read and follow all instructions carefully. Installation should be performed by a qualified electrician.

- Always turn off the main power supply at the circuit breaker before beginning installation or performing any maintenance.
- Ensure the mounting surface can support the weight of the fixture (approximately 49.9 lbs).
- Use only the specified voltage (AC85-256V).
- Do not connect the fixture to a dimmer switch unless it is specifically designed for LED dimming. This chandelier includes its own dimming capabilities via remote control or app.
- Handle crystal components with care to prevent breakage.
- Keep packaging materials away from children.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before installation. If any parts are missing or damaged, contact customer support.

- Chandelier Frame (Gold Stainless Steel Canopy)
- K9 Crystal Components (approx. 126 pieces)
- Mounting Hardware (screws, wire nuts, ceiling plate)
- Remote Control
- Instruction Manual


4. SPECIFICATIONS

Feature	Specification
Brand	IDEQUY
Model Name	Empire Chandeliers
Model Number	CF8006-100J
Dimensions (L x W x H)	40" x 40" x 12.5"
Weight	49.9 pounds
Material	Crystal, Stainless Steel
Color	Gold
Light Source Type	Integrated LED
Wattage	150 Watts
Brightness	13500 Lumens
Color Temperature	3000K-6000K (Dimmable)
Voltage	AC85-256V (Universal)
Installation Type	Flush Mount
Control Method	Remote Control, Wall Switch, APP (LampSmart pro)
Warranty	8 years Limited

Product specification

OVERALL PRODUCT WEIGHT

65LB

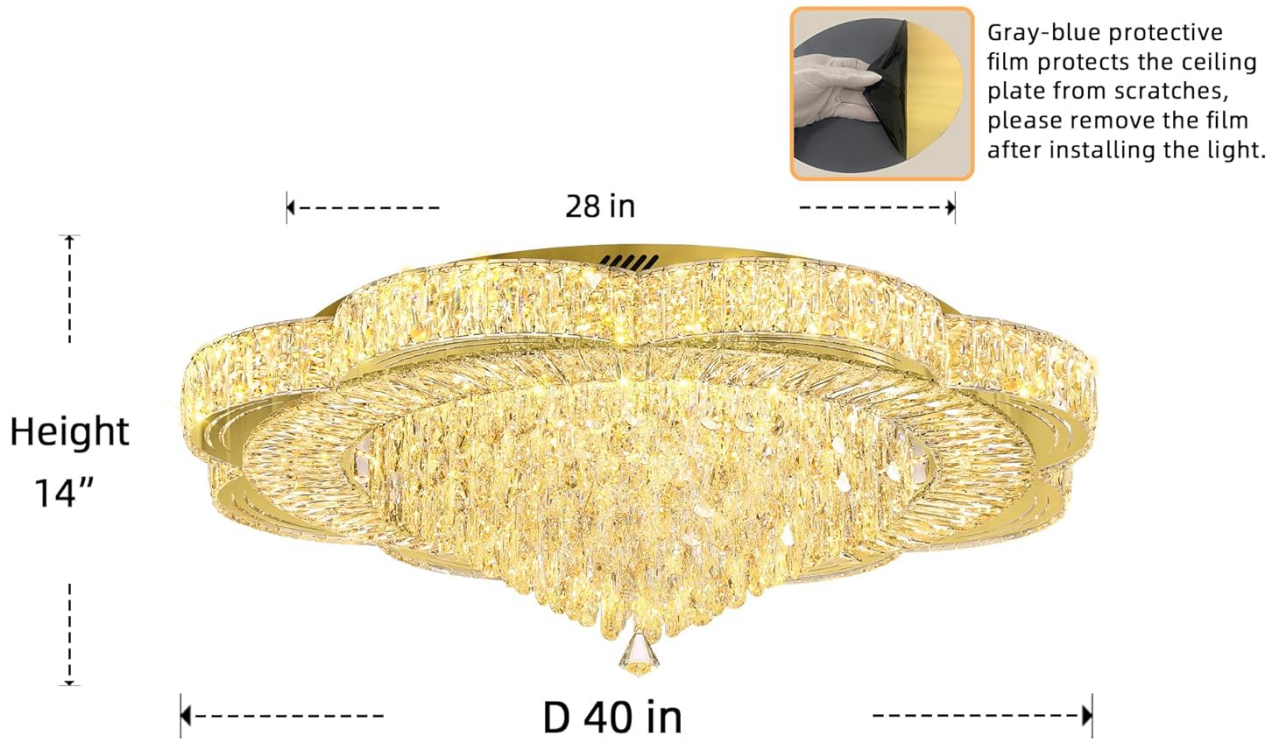

Voltage:110v

Material: stainless steel+crystal

Light Source:LED lamp beads

Light effect:2700-6000K dimmablev

Type:Chandelier

Colour: gold

Figure 4.1: Chandelier Dimensions and Basic Specifications

5. SETUP AND INSTALLATION

Important: Installation of this chandelier is recommended for two people due to its size and weight. Ensure power is OFF at the circuit breaker before starting.

5.1 Pre-Installation Checks

- Unpack Carefully:** Remove all components from the packaging. Inspect each crystal piece for any chips or damage. The manufacturer provides spare parts; replace any damaged crystals at this stage.
- Protective Film:** A gray-blue protective film covers the ceiling plate to prevent scratches. Remove this film after the light is installed.
- Mounting Surface:** Confirm your ceiling electrical box and mounting surface can safely support the chandelier's weight (49.9 lbs). Additional reinforcement may be required.

5.2 Mounting the Fixture

- Attach the mounting bracket to your ceiling electrical box using the provided screws. Ensure it is securely fastened.
- Connect the chandelier's electrical wires to your household wiring according to standard electrical codes (Live to Live, Neutral to Neutral, Ground to Ground).

- Carefully lift the chandelier frame and attach it to the mounting bracket. Secure it with the provided nuts or screws. This step typically requires two people.

5.3 Attaching Crystal Components

The chandelier includes approximately 126 individual crystal components. These are typically attached using small metal pins or hooks. Refer to the diagram (if provided with your specific model) for the correct placement of each crystal strand. This process can be time-consuming but is crucial for the chandelier's aesthetic.



Figure 5.1: Chandelier installed in a hallway, showcasing its design.

6. OPERATING INSTRUCTIONS

This chandelier features integrated LED lighting with adjustable color temperature and brightness.

6.1 Power On/Off

Turn the chandelier on or off using the provided remote control, the LampSmart pro app, or your standard wall switch.

6.2 Dimmable Features

The chandelier offers adjustable color temperature from 3000K (Warm White) to 6000K (Cool White) and brightness adjustment from 5% to 100%.

- **Remote Control:** Use the dedicated buttons on the remote control to adjust color temperature and brightness.
- **LampSmart pro App:** Download and connect to the 'LampSmart pro' app on your smartphone to control the light settings.
- **Wall Switch:** A standard wall switch can turn the light on/off. Note that your own dimmer switch cannot be used with this fixture as it has built-in dimming.



Figure 6.1: Color Temperature and Brightness Adjustment with Control Methods

7. MAINTENANCE

To maintain the appearance and performance of your chandelier:

- **Cleaning:** Ensure the power is off before cleaning. Use a soft, dry, or slightly damp cloth to wipe the metal frame. For crystals, use a soft, lint-free cloth, possibly dampened with a mild glass cleaner, then dry immediately. Avoid abrasive cleaners or solvents.
- **Crystal Care:** Periodically check that all crystal components are securely attached.

- **LEDs:** The integrated LED light source is designed for long-term use and does not require replacement.

8. TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	No power supply Loose wiring connection Remote control battery dead	Check circuit breaker. Ensure all wiring is secure. Replace remote control batteries.
Light flickers or dims unexpectedly	Loose wiring Incompatible dimmer switch (if used)	Check wiring connections. Ensure no external dimmer switch is used; rely on the chandelier's built-in dimming.
Remote control not working	Dead batteries Obstruction between remote and receiver	Replace batteries. Ensure clear line of sight to the chandelier.
Crystals appear dull	Dust or residue buildup	Clean crystals as per maintenance instructions.

If the problem persists after attempting these solutions, please contact IDEQY customer service.

9. WARRANTY AND SUPPORT

IDEQY provides an **8-year limited warranty** for this product. This warranty covers manufacturing defects and significant performance issues under normal use.

In case of damaged or missing parts during transportation, free replacements will be provided. For any questions, concerns, or warranty claims, please contact IDEQY customer service. Our professional engineer team offers 24-hour online service to assist you.

Contact information can typically be found on the product packaging or the seller's page where the product was purchased.