

FPG
3000 Series
Inline 600 In
Counter Square
Heated



FPG 3000 Series Inline 600 In Counter Square Heated Owner's Manual

[Home](#) » [FPG](#) » FPG 3000 Series Inline 600 In Counter Square Heated Owner's Manual 

Contents

- [1 FPG 3000 Series Inline 600 In Counter Square Heated](#)
- [2 Product Usage Instructions](#)
- [3 FAQ](#)
- [4 Specifications](#)
- [5 FEATURES](#)
- [6 OPTIONS & ACCESSORIES](#)
- [7 DIMENSIONS](#)
- [8 More information](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



FPG 3000 Series Inline 600 In Counter Square Heated



Specifications

- **Model:** 3000 SERIES 600 IN-COUNTER/SQUARE HEATED
- **Installation:** Inline 3000 SERIES
- **Heated:** IN-3H06-SQ-FF-IC IN-3H06-SQ-SD-IC
- **Display Area:** 0.31 m²
- **Levels:** 2 Shelves
- **Energy Efficiency:** 0.6 kWh per hour (average)
- **LED Lighting:** 25,000 hours at 2758 lumens per meter
- **Construction:** Stainless 304 and mild steel
- **Dimensions:** 771 x 600 x 662 mm

Product Usage Instructions

Installation

- Refer to the product manual for detailed installation guidelines. Ensure the model cutout dimensions are followed for proper fit.

Temperature Control

- Set the recommended core product temperature based on your specific requirements. Use the heating element with low wattage density for even temperature distribution.

Display and Lighting

- Utilize the tiltable, height-adjustable stainless steel wire rack shelves for maximum display capacity. Make use of the LED lighting system for optimal illumination.

Cleaning and Maintenance

- Regularly clean the cabinet using mild detergents and soft cloths to maintain hygiene. Ensure all electrical connections are secure and free from damage.

FAQ

- **Q: Can I change the plug specification for the electrical connection?**
 - **A:** Yes, please advise your country's requirements to change the plug specification. Contact FPG for assistance.
- **Q: What are the IP rating and electrical specifications of the product?**
 - **A:** The IP rating is IP20, and the electrical data includes a voltage of 220-240V, single-phase, and a current of 3.7A.
- **Q: How do I access technical data and installation guidelines?**
 - **A:** More information, including technical data and installation guidelines, is available in the product manual published on our website. You can also contact FPG for further support.

Specifications

RANGE	INLINE 3000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-3H06-SQ-FF-IC	IN-3H06-SQ-SD-IC
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
HEIGHT	771mm	
WIDTH	600mm	
DEPTH	662mm	

TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

- **High energy efficiency:** 0.6 kWh per hour (average)

- **Cabinet operating temperature range** +30°C – +90°C
- **Recommended core product temperature** +65°C – +80°C
- Smart display with double-glazed glass finished with a black trim
- Fixed Front or Sliding Doors Heated Display
- Two tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support a maximum display capacity 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top
- **Unique shelf-mounted ticket strip front and rear** : 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Designed to be installed into joinery

OPTIONS & ACCESSORIES

- Contact an [FPG Sales Representative](#) for our full range, including.
- **Shelf trays:** Toughened safety glass or mild steel.
- Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to the base: 30mm
- 25,000-hour LED lighting on shelves
- Branded decals
- Rear door or end glass mirror application
- Forward-facing controls
- Custom joinery solution

Specifications

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3H06-SQ-XX-IC	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3H06-SQ-XX-IC	220-240 V	Single	3.7 A	14.4	0.6	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

1. Please advise the country to change the plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3H06-SQ-FF-IC	0.31 m2	2 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3H06-SQ-SD-IC	0.31 m2	2 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3H06-SQ-XX-IC	771 x 600 x 662	– kg

- Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note;

- Model cutout dimensions:** IN-3H06-SQ-XX-IC models require a 578 x 650mm benchtop cutout (see product manual for installation guide).

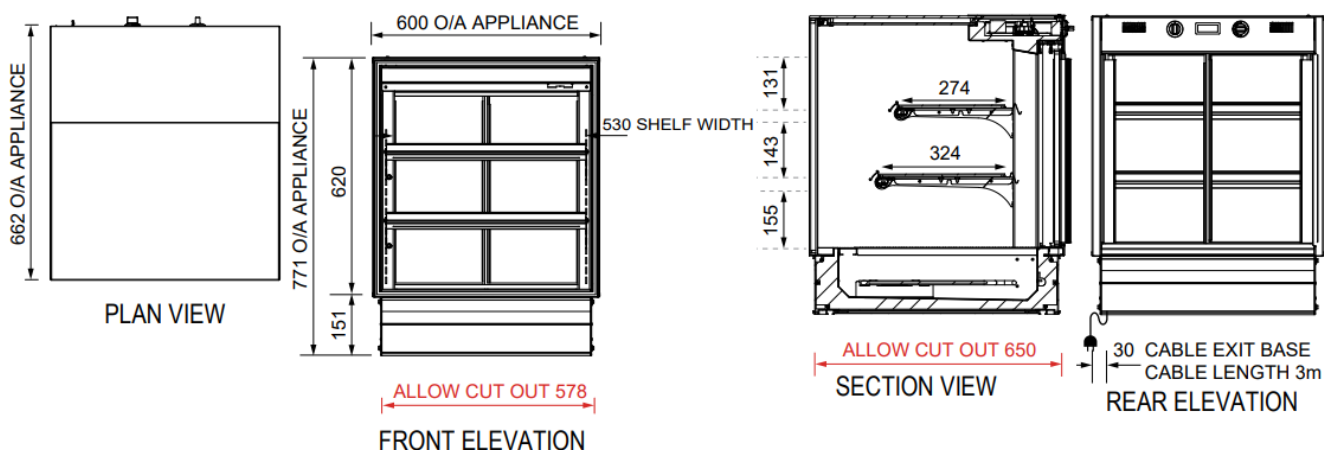

More information

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.
- **12/24 © 2024 Future Products Group Limited**
- **Worldwide contact details:**
- FPGWORLD.COM



- Please contact FPG to discuss your requirements for meeting country-specific standards.



- FPGWORLD.COM

Documents / Resources

	<p>FPG 3000 Series Inline 600 In Counter Square Heated [pdf] Owner's Manual IN-3H06-SQ-FF-IC, IN-3H06-SQ-SD-IC, IN-3H06-SQ-XX-IC, 3000 Series Inline 600 In Counter Square Heated, 3000 Series, Inline 600 In Counter Square Heated, 600 In Counter Square Heated, Counter Square Heated, Square Heated, Heated</p>
--	--

References

- [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.