

FPG
FPG 4000
Series 1200
in
Counter/Sq
uare
Ambient



FPG 4000 Series 1200 in Counter/Square Ambient Owner's Manual

[Home](#) » [FPG](#) » FPG 4000 Series 1200 in Counter/Square Ambient Owner's Manual 

Contents

- [1 FPG 4000 Series 1200 in Counter/Square Ambient](#)
- [2 Product Usage Instructions](#)
- [3 FEATURES](#)
- [4 OPTIONS & ACCESSORIES](#)
- [5 AMBIENT DATA](#)
- [6 ELECTRICAL DATA](#)
- [7 DIMENSIONS](#)
- [8 Installation note;](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)



FPG 4000 Series 1200 in Counter/Square Ambient



Product Usage Instructions

Installation

Ensure the model cutout dimensions are followed: IN-4A12-SQ-XX-IC models require a 1172 x 746mm benchtop cutout. Refer to the product manual for detailed installation instructions. When installing this cabinet next to an adjacent Inline 4000 Series refrigerated cabinet, remember to install an Inline 4000 Series thermal divider panel (accessory) between them.

Operation

This product is designed for ambient temperature display purposes. Ensure the unit is plugged into a suitable power source following the electrical data provided.

Maintenance

Regularly clean the stainless steel frame and glass components with appropriate cleaning agents to maintain the product's appearance and durability.

RANGE	INLINE 4000 SERIES	
TEMPERATURE	AMBIENT	
MODEL	IN-4A12-SQ-FF-IC	IN-4A12-SQ-SD-IC
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
HEIGHT	996mm	
WIDTH	1203mm	
DEPTH CORE PRODUCT TEMP ERATURE	778mm AMBIENT	

FEATURES

High energy efficiency: 0.06 kWh per hour (average)

- Cabinet operating at ambient temperature
- Smart display with toughened safety glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Ambient Display

- Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel for durability with toughened safety glass and double-glazed end panels
- Fan assisted air circulation to mitigate heat build-up
- Designed to be installed into joinery

Showing : Inline 4000 Series ambient 1200mm square in-counter fixed front

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Angled base insert
- Branded decals
- Rear door or end glass mirror application
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution

Please contact FPG to discuss your requirements for meeting country-specific standards.

AMBIENT DATA

MODEL	CORE PRODUCT TEMPERATURE
IN-4A12-SQ-XX-IC	Ambient

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H(kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-4A12-SQ-XX-IC	220-240 V	Single	0.28 A	1.4	0.06	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural

1Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-4A12-SQ-FF-IC	2.2 m2	3 Shelves + Base	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-4A12-SQ-SD-IC	2.2 m2	3 Shelves + Base	Sliding doors	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-4A12-SQ-XX-IC	996 x 1203 x 778	– kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note;


Model cutout dimensions: IN-4A12-SQ-XX-IC models require 1172 x 746mm benchtop cutout (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 4000 Series refrigerated cabinet, please install an Inline 4000 Series thermal divider panel (accessory) between them.

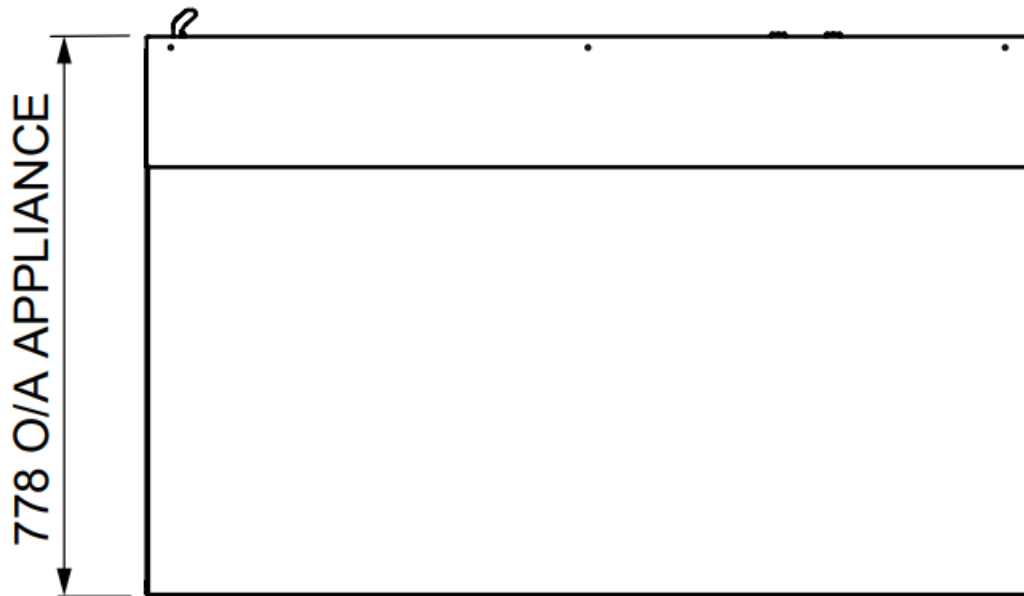


PLAN VIEW

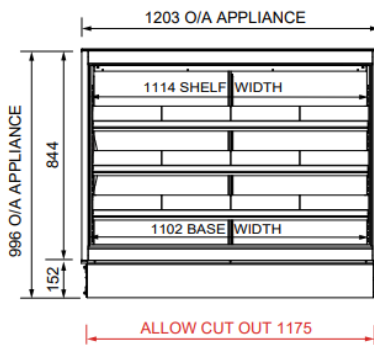

FRONT ELEVATION



SECTION VIEW

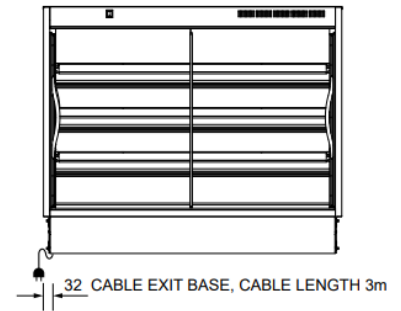

REAR ELEVATION

FAQ

How do I change the plug specification?

To change the plug specification for your country, please contact FPG for guidance and assistance.

Where can I find more technical data and installation guidelines?

For more detailed technical information and installation guidelines, refer to the Product Manual available on the FPG website.

Can the display area shelves be adjusted?


No, the display area shelves are fixed and cannot be adjusted.

What is the IP rating of the product?

The IP rating of the product is IP20, indicating protection against solid objects larger than 12mm and having no harmful effects.

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.


12/24 © 2024 Future Products Group Limited



Worldwide contact details:

FPGWORLD.COM

Documents / Resources

	<p>FPG 4000 Series 1200 in Counter/Square Ambient [pdf] Owner's Manual IN-4A12-SQ-FF-IC, IN-4A12-SQ-SD-IC, IN-4A12-SQ-XX-IC, 4000 Series 1200 in Counter Square Ambient, 4000 Series, 1200 in Counter Square Ambient, in Counter Square Ambient, Square Ambient, Ambient</p>
---	---

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.