



# FPG 4000 Series 1500 in Counter/Square Ambient Owner's Manual

[Home](#) » [FPG](#) » FPG 4000 Series 1500 in Counter/Square Ambient Owner's Manual 

## Contents

- [1 FPG 4000 Series 1500 in Counter/Square Ambient](#)
- [2 Specifications](#)
- [3 Product Overview](#)
- [4 FEATURES](#)
- [5 OPTIONS & ACCESSORIES](#)
- [6 Installation](#)
- [7 LED Lighting](#)
- [8 FAQs](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)




**FPG 4000 Series 1500 in Counter/Square Ambient**




## Specifications


- **Model:** IN-4A15-SQ-XX-IC
- **Core Product Temperature:** Ambient
- **Electrical Data:**
  - **Model:** IN-4A15-SQ-XX-IC
  - **Voltage:** 220-240 V Single
  - **Phase:** 0.39 A
  - **Energy Consumption (kWh):** 2.2 kWh per hour (average)
  - **IP Rating:** IP 20
  - **Main Connection:** 3 metre, 3 core cable
  - **Connection Plug:** 10 amp, 3 pin plug

## Product Overview

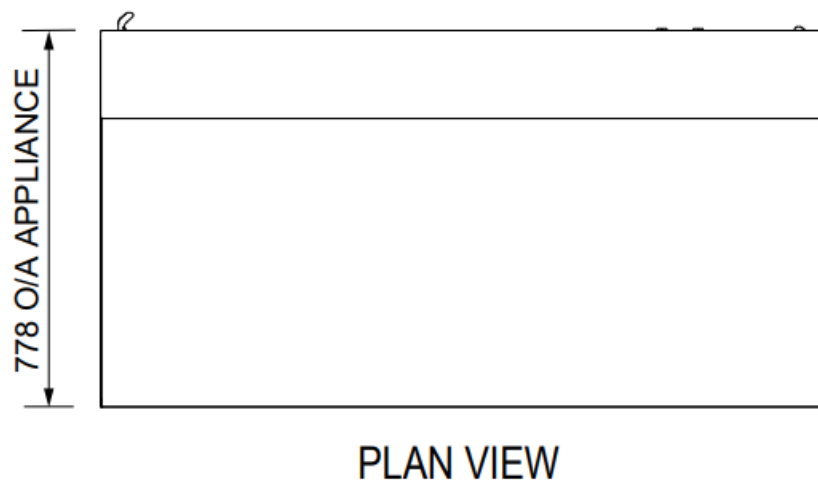


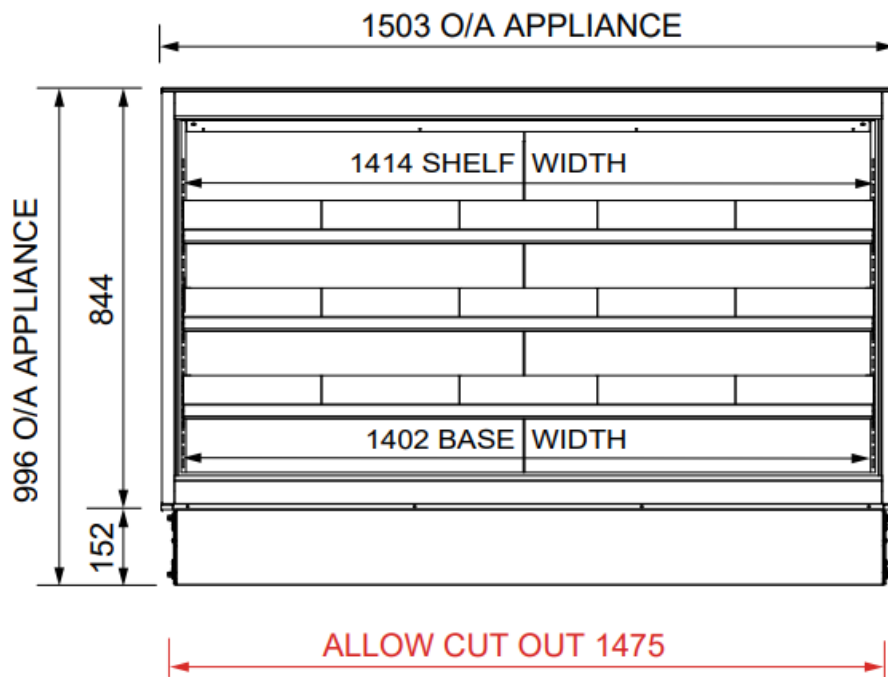

FRONT ELEVATION

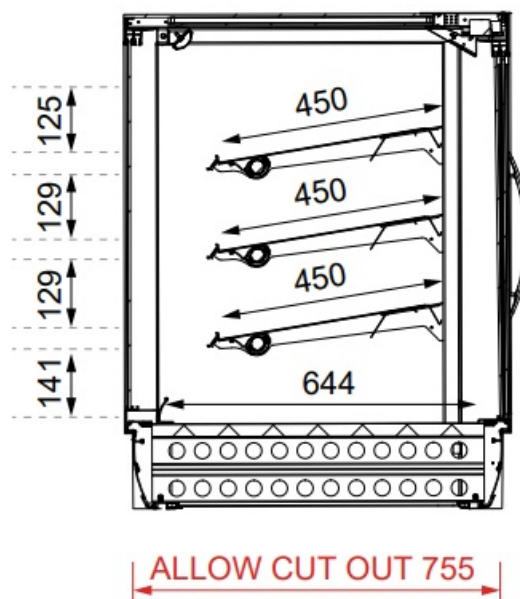

SECTION VIEW

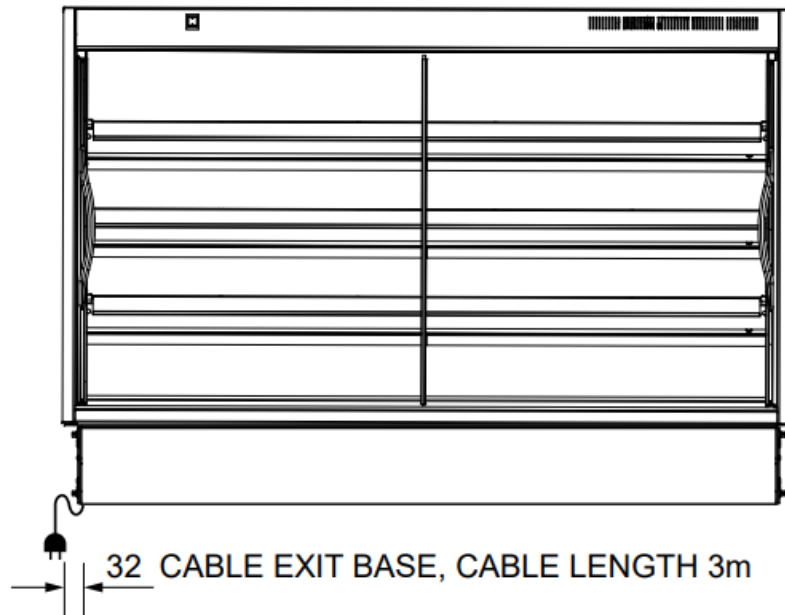

## REAR ELEVATION

### FEATURES

- High energy efficiency: 0.09 kWh per hour (average)
- Cabinet operating at ambient temperature
- Smart display with toughened safety glass encased in brushed stainless steel frame

### Fixed Front or Sliding Doors Ambient Display

- Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf-mounted ticket strip front and rear: 30mm

### Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel for durability with toughened safety glass and double-glazed end panels
- FFan-assisted air circulation to mitigate heat build-up
- Designed to be installed into joinery

### OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Color and wood options available for steel shelf trays
- Angled base insert

- Branded decals
- Rear door or end glass mirror application
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution

## AMBIENT DATA

MODEL	CORE PRODUCT TEMPERATURE
IN-4A15-SQ-XX-IC	Ambient

## ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-4A15-SQ-XX-IC	220-240 V	Single	0.39 A	2.2	0.09	IP 20	3 meter, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural

## CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-4A15-SQ-FF-IC	2.8 m <sup>2</sup>	3 Shelves + Base	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-4A15-SQ-SD-IC	2.8 m <sup>2</sup>	3 Shelves + Base	Sliding doors	Sliding doors	Stainless 304 and mild steel

## DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-4A15-SQ-XX-IC	996 x 1503 x 778	– kg

## Installation

Refer to the product manual for detailed installation guidelines. Ensure to follow the cutout dimensions of 1475 x 755mm for benchtop installation. If installed next to an Inline 4000 Series refrigerated cabinet, use a thermal divider panel between them.

### Installation note;

Model cutout dimensions: IN-4A15-SQ-XX-IC models require a 1475 x 755mm benchtop cutout (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 4000 Series refrigerated

cabinet, please install an Inline 4000 Series thermal divider panel (accessory) between them.

## LED Lighting

The unit is equipped with LED lighting providing 2758 lumens per metre in a natural color.

**More information including technical data and installation guidelines is available from the Product Manual published on our website.**

In line with our policy to continually develop, improve, and support our products, Future Products Group Ltd reserves the right to change specifications and designs without notice.

### Have a question?

Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

## FAQs


### Q: Can I change the plug specification for the model?

A: Yes, please advise your country when purchasing to change the plug specification accordingly.

### Q: Where can I find more information about technical data and installation guidelines?

A: You can access the product manual on our website for detailed technical data and installation guidelines.

## Documents / Resources

	<p><b><a href="#">FPG 4000 Series 1500 in Counter/Square Ambient</a></b> [pdf] Owner's Manual IN-4A15-SQ-FF-IC, IN-4A15-SQ-SD-IC, IN-4A15-SQ-XX-IC, 4000 Series 1500 in Counter Square Ambient, 4000 Series, 1500 in Counter Square Ambient, in Counter Square Ambient, Square Ambient, Ambient</p>
---	---

## References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

### [Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.