

FPG

IN-3CA08-CU-SD-FS
Inline 3000 Series Food
Display Solutions



FPG IN-3CA08-CU-SD-FS Inline 3000 Series Food Display Solutions Owner's Manual

[Home](#) » [FPG](#) » FPG IN-3CA08-CU-SD-FS Inline 3000 Series Food Display Solutions Owner's Manual 

Contents

- [1 FPG IN-3CA08-CU-SD-FS Inline 3000 Series Food Display Solutions](#)
- [2 FEATURES](#)
- [3 Operational Excellence](#)
- [4 OPTIONS & ACCESSORIES](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)



FPG IN-3CA08-CU-SD-FS Inline 3000 Series Food Display Solutions



RANGE	INLINE 3000 SERIES	
TEMPERATURE	CONTROLLED AMBIENT	
MODEL	IN-3CA08-CU-FF-FS	IN-3CA08-CU-SD-FS
FRONT	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
INSTALLATION	FREESTANDING	
REFRIGERATION	INTEGRAL, R513A	
HEIGHT	1261mm	
WIDTH	803mm	
DEPTH	663mm	

CORE PRODUCT TEMPERATURE	+16°C – +18°C
ENVIRONMENTAL TEST CONDITIONS	CLIMATE CLASS 3 25°C / 60% RH

FEATURES

- High energy efficiency: 0.36 kWh per hour (average)
- Maintains an average of +16°C – +18°C core product the temperature at Climate Class 3 25°C/60%RH with up to 60 door openings per hour

- Smart display with double-glazed glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Controlled Ambient Display

Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity 50,000-hour LED lighting system at 2758 lumens per meter in cabinet top

- Unique shelf-mounted ticket strip front and rear: 30mm
- Extrusion at the top of the cabinet – front only – is fitted with a stainless steel panel that can be replaced with a branded insert

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding door options (customer side)
- High internal humidity maintains and extends shelf life
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control, and durability
- FPG Freeflow air ventilation at the rear eliminates the need for front ventilation panels

Showing: Inline 3000 Series controlled ambient 800mm curved freestanding fixed front with integral refrigeration.

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including

- Remote refrigeration with TX, EPR, or Solenoid valves for connection
- Shelf trays: Toughened safety glass or mild steel.
- Colour and wood print options available for steel shelf trays
- 50,000-hour LED lighting to shelves
- Angled base insert
- Branded decals/insert
- Rear door or end glass mirror application
- Auto Condensate Removal (ACR)
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- Forward-facing controls
- Rear deck assemblies
- Thermal divider panels
- Custom joinery solution

REFRIGERATION DATA

MODEL	CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	REFRIGERATION	REFRIGERANT	CONDENSATE REMOVAL
IN-3CA08-CU-XX-FS	+16°C – +18°C	Climate Class 3 – 25°C / 60% RH	Integral	R513A	Manual/ACR1

Option.

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG2	HOURS	LUMENS	COLOR
IN-3CA08-CU-XX-FS	220-240 V	Single	2.8 A	8.69	0.36	IP 20	3 meter, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural
ACR (Option)			1.7 A	9.60	0.40						

Please, advise the country to change the plug specification.

CAPACITY, ACCESS & CONSTRUCTION


MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	DOOR OPENINGS @ +16°C – +18°C	CHASSIS CONSTRUCTION
IN-3CA08-CU-FF-FS	0.9 m2	3 Shelves + Base	Fixed front	Sliding doors	60 per hour	Stainless 304 and mild steel
IN-3CA08-CU-SD-FS	0.9 m2	3 Shelves + Base	Sliding doors	Sliding doors	60 per hour	Stainless 304 and mild steel

DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3CA08-CU-XX-FS	1261 x 803 x 663	– kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note

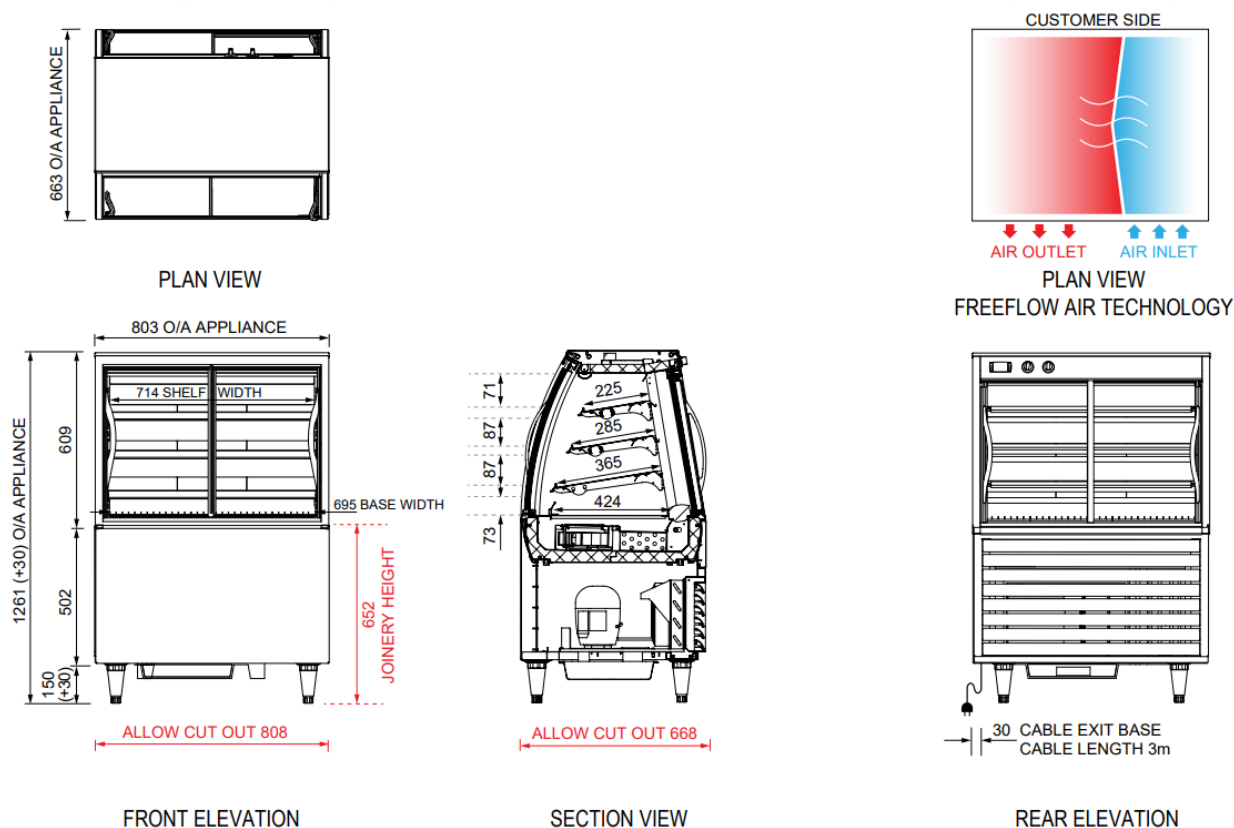

Model cutout dimensions: IN-3CA08-CU-XX-FS models require an 808 x 668mm benchtop cutout. Joinery height 652mm (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 3000 Series refrigerated cabinet, please install an Inline 3000 Series thermal divider panel (accessory) between them. UNOBSTRUCTED AIRFLOW MUST BE MAINTAINED TO ENSURE UNIT PERFORMANCE AND MAINTAIN WARRANTY.

More information including technical data and installation guidelines is available from the Product Manual published on our website. In line with our policy to continually develop, improve, and support our products, Future Products Group Ltd reserves the right to change specifications and designs without notice. Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

12/24 © 2024 Future Products Group Limited
Worldwide contact details FPGWORLD.COM



Documents / Resources

	<p>FPG IN-3CA08-CU-SD-FS Inline 3000 Series Food Display Solutions [pdf] Owner's Manual IN-3CA08-CU-FF-FS, IN-3CA08-CU-SD-FS, IN-3CA08-CU-SD-FS Inline 3000 Series Food Display Solutions, IN-3CA08-CU-SD-FS, Inline 3000 Series Food Display Solutions, Food Display Solutions, Display Solutions, Solutions</p>
--	--

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.