Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

PUPKIDS Cavalier 400

PUPKIDS GPS Wireless Dog Fence System User Manual

Model: Cavalier 400

Introduction

The PUPKIDS GPS Wireless Dog Fence System provides a safe and effective way to establish a virtual boundary for your dog outdoors. Utilizing advanced GPS and GNSS technology, the system offers precise positioning and customizable warning modes to ensure your pet remains within a designated safe area. This manual provides comprehensive instructions for setup, operation, and maintenance of your device.

Package Contents

Upon unboxing your PUPKIDS GPS Wireless Dog Fence System, please verify that all components listed below are included:

- Wireless Fence Collar
- Boundary Flags (10 pieces)
- Silicone Prong Set (various sizes)
- Type-C Charging Cable
- User Manual
- Dog Training Guide
- Test Light



Image: All components included in the PUPKIDS GPS Wireless Dog Fence System package.

Setup Instructions

Follow these steps to set up your GPS Wireless Dog Fence System:

1. Charging the Collar

Before first use, fully charge the collar using the provided Type-C charging cable. The collar features a 1000 mAh battery, providing up to 24 hours of working time on a full charge. The light indicator on the collar will turn green when fully charged.



Image: The collar connected to its Type-C charging cable, illustrating the charging process.

2. Attaching Prongs and Caps

Select the appropriate size of contact prongs and silicone caps based on your dog's coat length. Use shorter prongs for thin-haired dogs and longer prongs for thick-haired dogs. Securely screw the chosen prongs into the collar and place the silicone caps over them for comfort and double protection.



Image: Illustration of different prong sizes and silicone caps for the collar, emphasizing double protection.

3. Finding GPS Signal and Setting Up Boundary

The system operates outdoors using GPS and GNSS dual satellite technology. For optimal performance, ensure you are in an open outdoor area with at least three GPS signal bars on the collar's display. The collar positions twice per second for accurate boundary definition.

1. **Turn on the device** and allow it to search for satellite signals to begin positioning.
2. **Move to your desired center point** for the safe zone. This will be the central reference for your dog's boundary.
3. **Set the center point:** After the receiver successfully searches for a GPS signal, hold the appropriate button for 3 seconds. The TFT display will show the "Center Reset" interface. Press "YES" to confirm the center point.
4. **Set the safe radius distance:** From the functional interface, select the radius setting icon. Adjust the safe radius distance from 33 yards up to 9999 yards. This defines the circular boundary for your dog.
5. **Select a warning mode:** Choose from No Static (Beep + Vibrate), General Static (Beep + Vibrate + Static), or Enhanced Static.

6. Once all settings are configured, the system is ready for use.

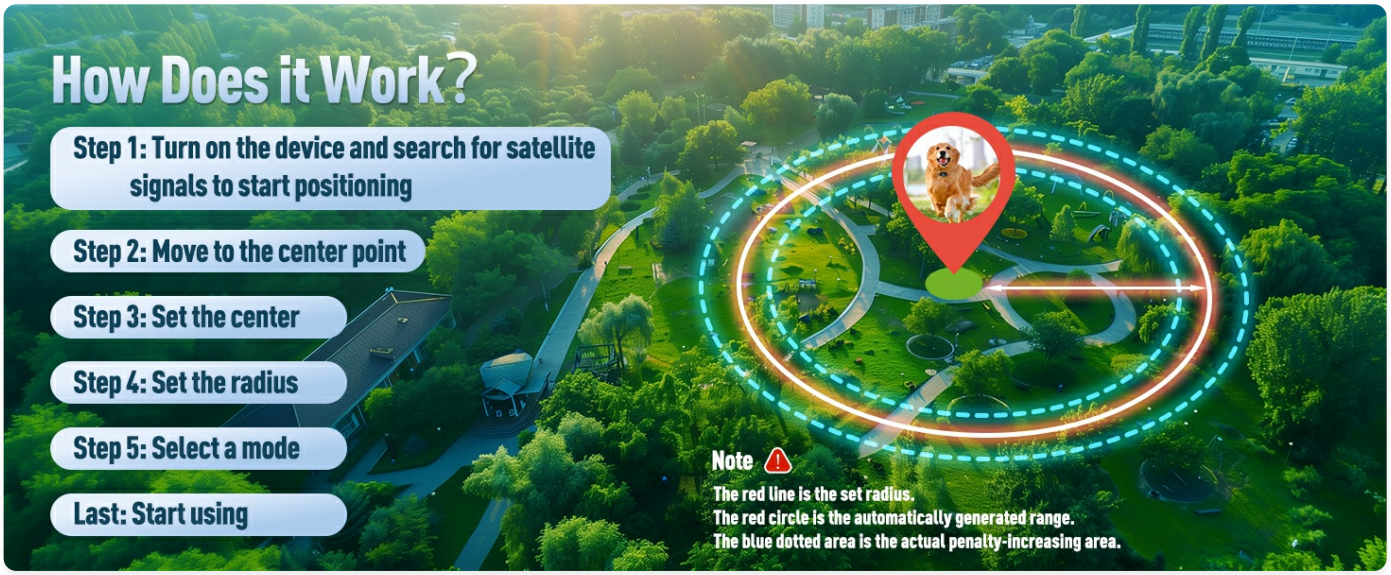


Image: Visual guide on how to set up the GPS Wireless Dog Fence System, from power on to setting the safe zone.

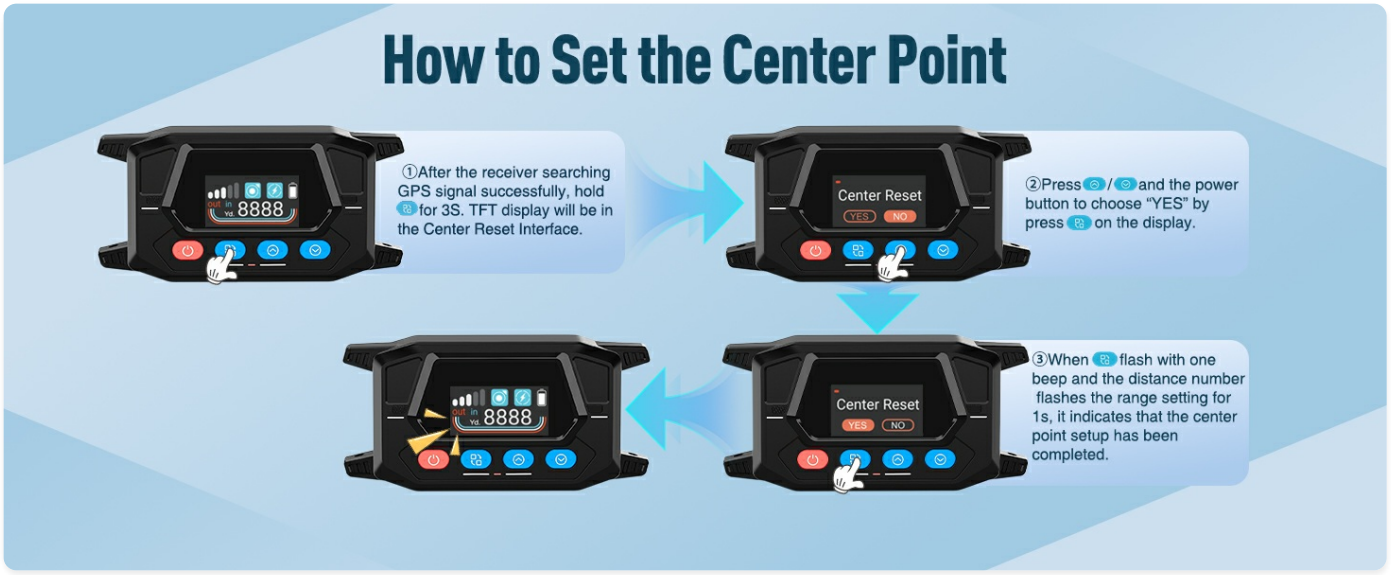


Image: Step-by-step instructions for setting the center point of the boundary using the collar's interface.

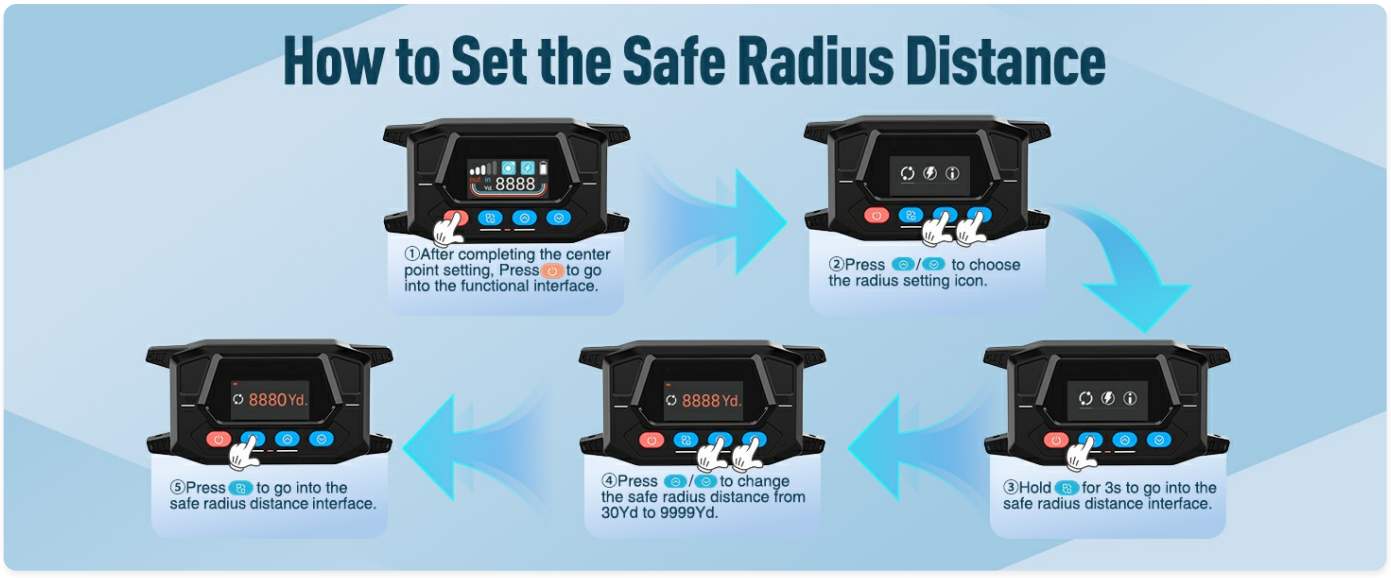


Image: Step-by-step instructions for adjusting the safe radius distance on the collar's display.



Image: Step-by-step instructions for selecting the desired stimulation mode on the collar's display.

Operating Instructions

Once the system is set up, ensure your dog is wearing the collar correctly. The collar is designed for medium to large dogs weighing over 20 lbs, with neck sizes ranging from 12 to 25 inches. It is not suitable for small dogs or puppies.

Warning Modes

The system features three distinct warning modes to effectively train your dog:

- **No Static:** Provides a warning through a combination of beep sounds and vibration.
- **General Static:** Combines beep sounds, vibration, and a mild static correction.
- **Enhanced Static:** Combines beep sounds, vibration, and a stronger static correction.

The warning intensity increases as your dog approaches the boundary. The system is designed to provide a low warning in the outer border zone and a high warning as the dog gets closer to the defined perimeter.



Image: Visual representation of the collar's adjustable warning modes based on distance from the boundary.



Image: Illustration of how warning intensity increases as the dog approaches the boundary of the wireless fence.

Outdoor Use Only

This GPS wireless fence system is designed exclusively for outdoor use. It requires a clear line of sight to GPS satellites and will not function reliably indoors or in areas with significant interference (e.g., dense forests, large buildings). Ensure the GPS signal strength is consistently strong (three bars or more) for accurate boundary enforcement.

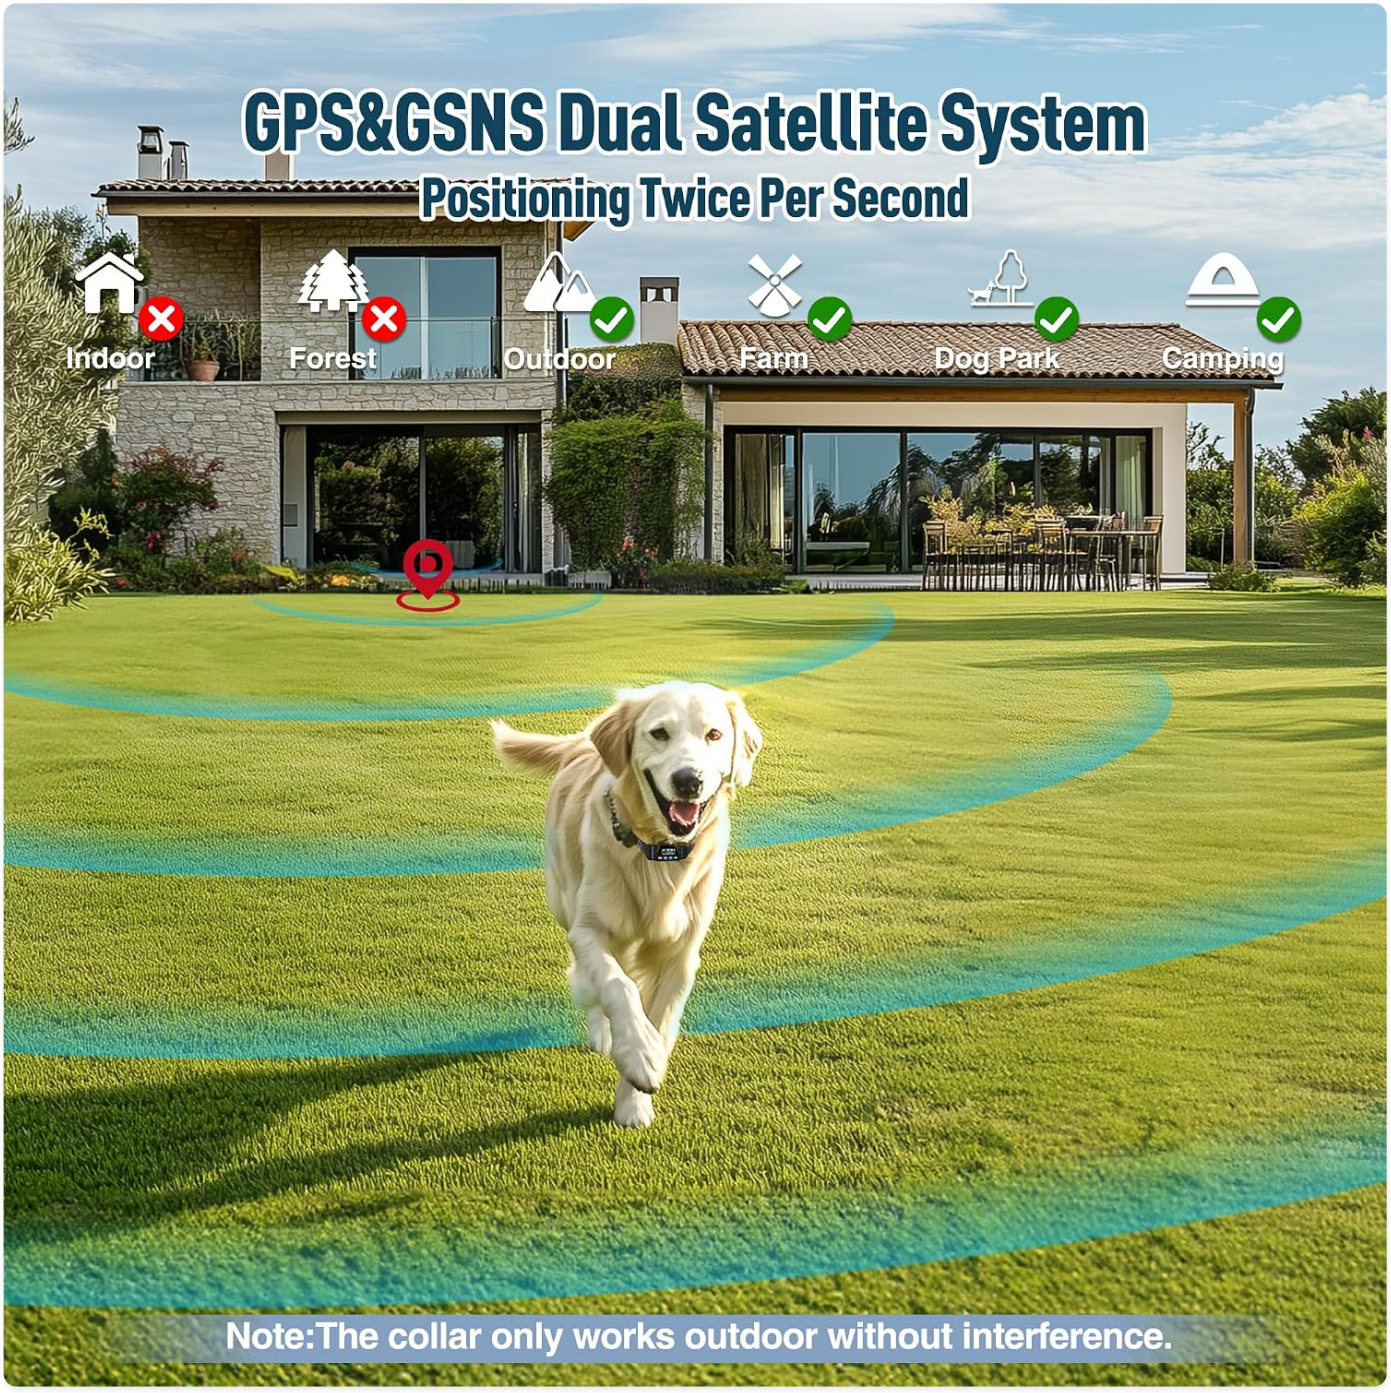


Image: The GPS/GNSS dual satellite system is effective in open outdoor environments like farms, dog parks, and camping areas, but not indoors or in dense forests.

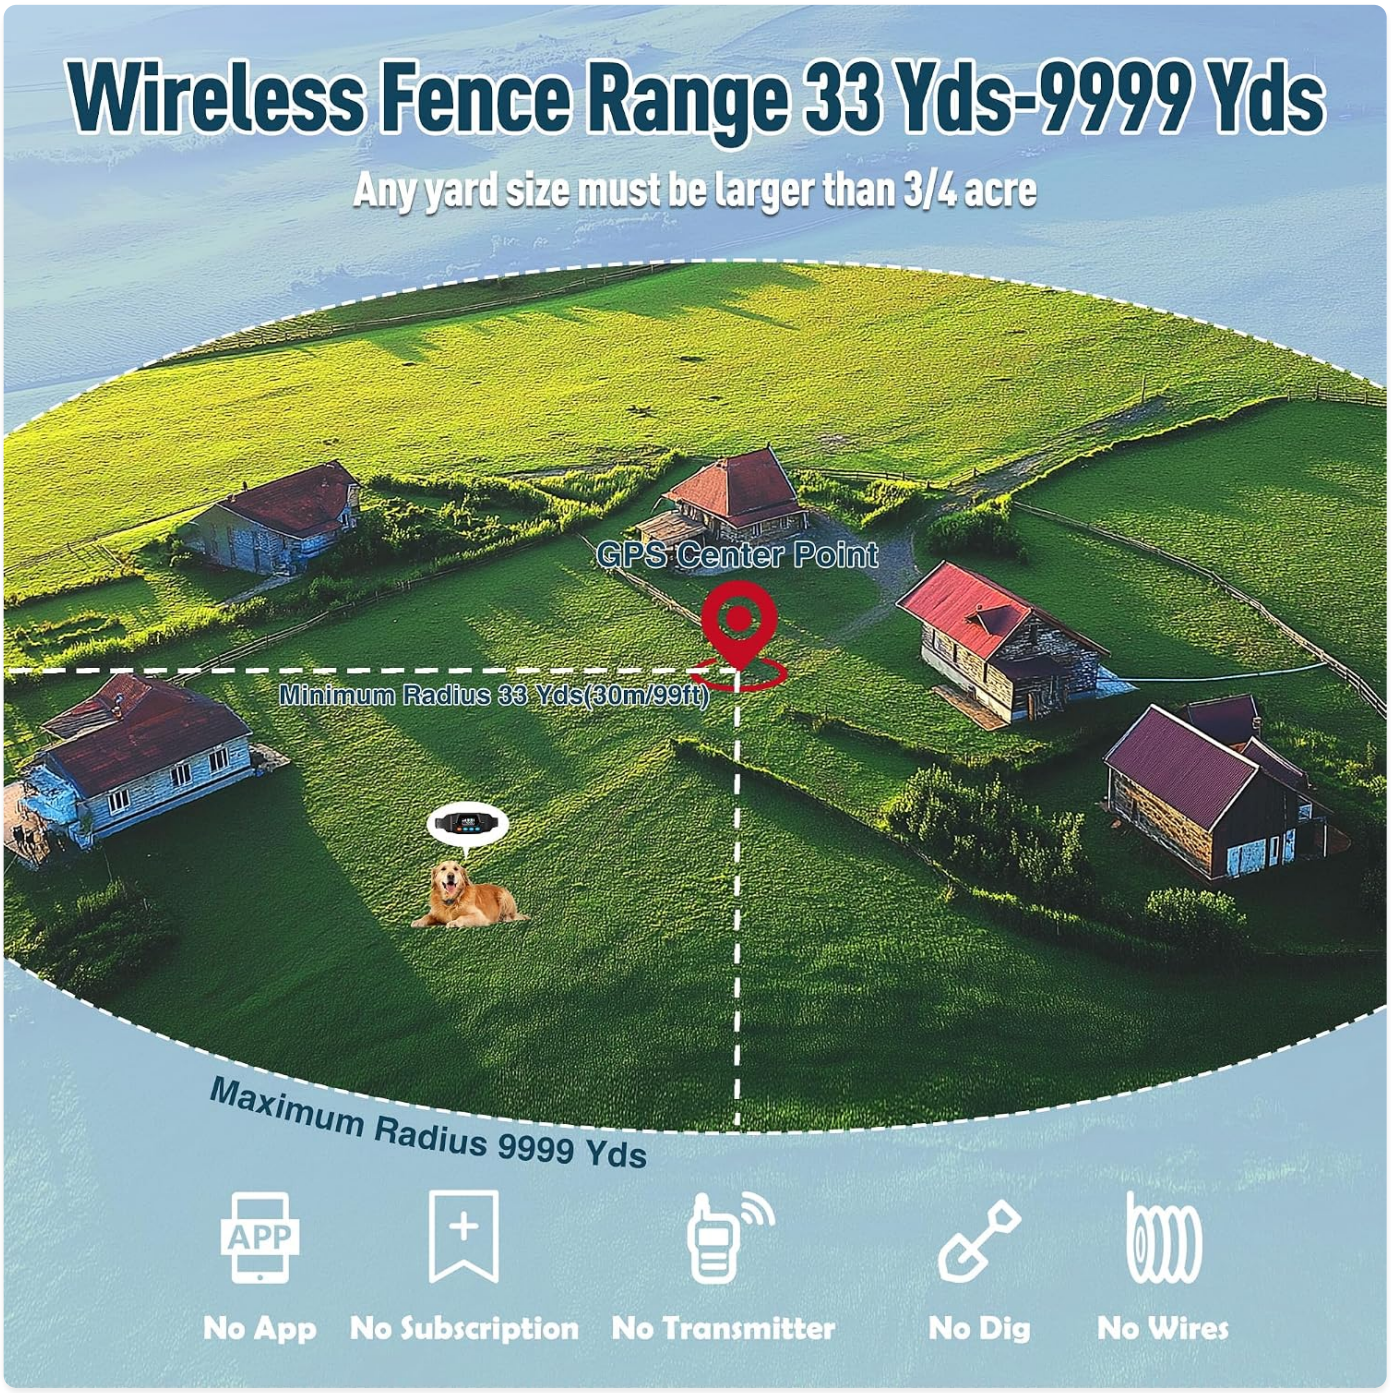


Image: The wireless fence offers an adjustable range from 33 yards to 9999 yards, suitable for yards larger than 3/4 acre.

Maintenance

Waterproof Design

The PUPKIDS GPS Wireless Dog Fence Collar is IPX7 waterproof, meaning it can withstand immersion in water up to 1 meter for 30 minutes. This makes it suitable for use in rainy conditions, during bathing, or even while your dog is swimming. Always ensure the charging port cover is securely closed when not charging to maintain its waterproof integrity.



Image: The IPX7 waterproof collar is designed for durability in various wet conditions, including rain and swimming.

Troubleshooting

If you encounter any issues with your PUPKIDS GPS Wireless Dog Fence System, please refer to the detailed training guide included in your package. This guide provides specific steps for common problems and training tips. Ensure the collar has a strong GPS signal (at least three bars) and is used in an open outdoor environment without interference.

Specifications

Feature	Detail
Brand Name	PUPKIDS
Model Name	Cavalier 400
Item Weight	15.8 ounces

Item Package Dimensions	7.4 x 7.13 x 2.13 inches
Batteries	2 Lithium Polymer batteries (included)
Battery Capacity	1000 mAh
Working Time	Up to 24 hours
Waterproof Rating	IPX7
Adjustable Radius	33 - 9999 Yards
Warning Modes	No static, General static, Enhanced static
Target Dog Size	Medium to Large dogs (over 20 lbs, neck 12-25 inches)
Country of Origin	China

Warranty and Support

The PUPKIDS GPS Wireless Dog Fence System comes with a **1-year warranty** from the date of purchase.
For any questions, technical support, or warranty claims, please contact PUPKIDS customer service:
Email: support@pupkids.net (Available 24 hours/7 days)

© 2025 PUPKIDS. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0DRX99CGR

More documents and user manuals: **https://manuals.plus/**