



FPG IN-4A08-SQ-FF-FS Food Display Solutions Owner's Manual

[Home](#) » [FPG](#) » FPG IN-4A08-SQ-FF-FS Food Display Solutions Owner's Manual 

FPG IN-4A08-SQ-FF-FS Food Display Solutions



Contents

- [1 Specification](#)
- [2 FEATURES](#)
- [3 OPTIONS & ACCESSORIES](#)
- [4 AMBIENT DATA](#)
- [5 ELECTRICAL DATA](#)
- [6 CAPACITY, ACCESS & CONSTRUCTION](#)
- [7 DIMENSIONS](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

Specification

RANGE	INLINE 4000 SERIES	
TEMPERATURE	AMBIENT	
MODEL	IN-4A08-SQ-FF-FS	IN-4A08-SQ-SD-FS
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	FREESTANDING	
HEIGHT	1405mm	
WIDTH	803mm	
DEPTH	778mm	
CORE PRODUCT TEMPERATURE	AMBIENT	

FEATURES



High energy efficiency: 0.05 kWh per hour (average)

- Cabinet operating at ambient temperature
- Smart display with toughened safety glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Ambient Display



Three tilt able, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity



50,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf

- Unique shelf mounted ticket strip front and rear: 30mm
- Integrated ambient rear storage area

Operational Excellence



Sliding doors (staff side) and fixed front or sliding doors options (customer side)



Constructed from stainless and mild steel for durability with toughened safety glass and double-glazed end panels

- Fan assisted air circulation to mitigate heat build-up
- Fitted with adjustable 150mm legs (+30mm adjustment)

Showing : Inline 4000 Series ambient 800mm square freestanding fixed front

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including

- Shelf trays: Toughened safety glass or mild steel.
Colour and woodprint options available for steel shelf trays
- Angled base insert
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- Forward-facing controls
- Chassis configured for joinery installation
- Rear deck assemblies
- Thermal divider panels
- Custom joinery solution

AMBIENT DATA

MODEL	CORE PRODUCT TEMPERATURE
IN-4A08-SQ-XX-FS	Ambient

ELECTRICAL DATA

MOD EL	VOLTA GE	PHA SE	CURR ENT	E24 H (k Wh)	kWh per hou r (averag e)	IP RA TING	MAINS		LED LIGHTING		
IN-4A 08-S Q-XX -FS	220-24 0 V	Singl e	0.23 A	1.2	0.05	IP 20	CONNECT ION	CONNECT ION PLUG 1	HOU RS	LUME NS	COLO UR
							3 metre, 3 core cable	10 amp, 3 pin plug	50,00 0	2758 p er met re	Natura l

1Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-4A08-SQ-FF-FS	1.4 m2	3 Shelves + Base	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-4A08-SQ-SD-FS	1.4 m2	3 Shelves + Base	Sliding doors	Sliding doors	Stainless 304 and mild steel

DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-4A08-SQ-XX-FS	1405 x 803 x 778	96 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note;


Model cutout dimensions: IN-4A08-SQ-XX-FS models require 775 x 755mm benchtop cutout. Joinery height 560mm (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 4000 Series refrigerated cabinet, please install an Inline 4000 Series thermal divider panel (accessory) between them.

Please contact FPG to configure this freestanding cabinet for joinery installation option.


PLAN VIEW

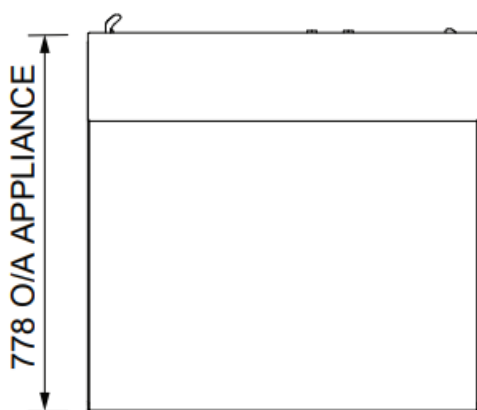


FRONT ELEVATION

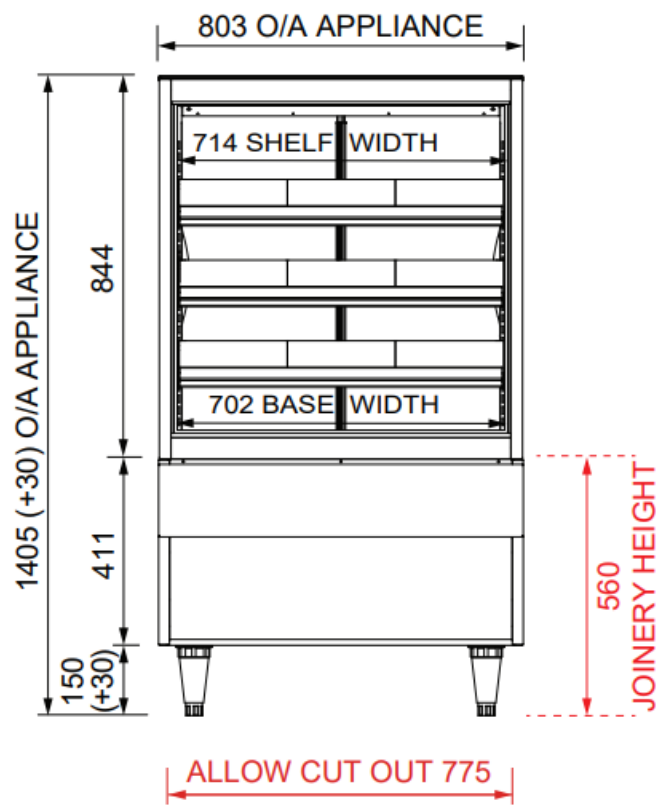

SECTION VIEW

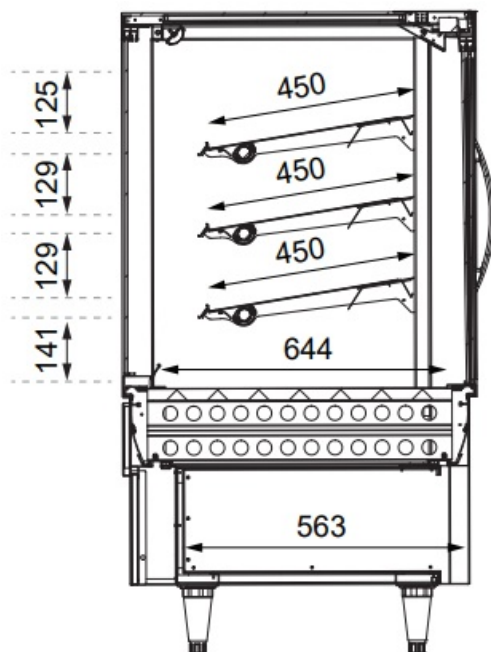

REAR ELEVATION

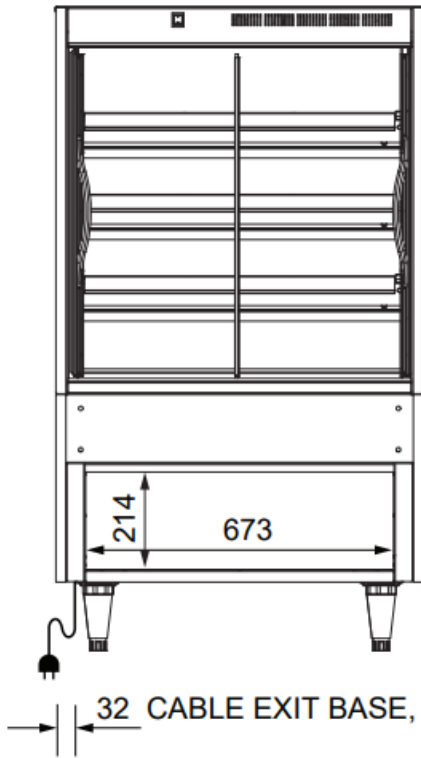

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

Worldwide contact details:



FPGWORLD.COM

© 2024 Future Products Group Limited





[FPG IN-4A08-SQ-FF-FS Food Display Solutions](#) [pdf] Owner's Manual
IN-4A08-SQ-FF-FS, IN-4A08-SQ-SD-FS, IN-4A08-SQ-XX-FS, IN-4A08-SQ-FF-FS Food Display Solutions, IN-4A08-SQ-FF-FS, Food Display Solutions, Display Solutions, Solutions

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.