



IN-5H18-CU-TF-FS
Series Food Display
Solutions



FPG IN-5H18-CU-TF-FS Series Food Display Solutions Owner's Manual

[Home](#) » [FPG](#) » FPG IN-5H18-CU-TF-FS Series Food Display Solutions Owner's Manual 

Contents

- [1 FPG IN-5H18-CU-TF-FS Series Food Display Solutions](#)
- [2 Product Usage Instructions](#)
- [3 Cleaning and Maintenance](#)
- [4 FAQ](#)
- [5 FEATURES](#)
- [6 Operational Excellence](#)
- [7 OPTIONS & ACCESSORIES](#)
- [8 SPECIFICATIONS](#)
- [9 Installation](#)
- [10 More information](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)



FPG IN-5H18-CU-TF-FS Series Food Display Solutions



Product Usage Instructions

- Ensure the model cutout dimensions match: 1760 x 725mm benchtop cutout with a joinery height of 603mm.
- Refer to the product manual for detailed installation instructions.

Operation

- Plug the appliance into a suitable power outlet following the electrical data specifications.
- Turn on the appliance using the designated switch or controls.

Cleaning and Maintenance

- Regularly clean the display area and shelves with a mild detergent and a soft cloth.
- Ensure the appliance is unplugged before performing any maintenance tasks.

FAQ

- **Q: How do I adjust the temperature on the heated display?**
 - **A:** The temperature can be adjusted using the controls provided on the appliance. Refer to the product manual for detailed instructions.
- **Q: Can I purchase additional accessories for this model?**
 - **A:** Yes, you can contact an FPG Sales Representative for our full range of options and accessories.
- **Q: What are the environmental test conditions for this product?**
 - **A:** The product is tested under specific environmental conditions to ensure optimal performance. Refer to the product manual for detailed information.

5000 SERIES 1800 FREESTANDING/CURVED HEATED

RANGE	INLINE 5000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-5H18-CU-TF-FS	IN-5H18-CU-SD-FS
FRONT	CURVED/ TILT FRONT	CURVED/ SLIDING DOORS
INSTALLATION	FREESTANDING	
HEIGHT	1443mm	
WIDTH	1807mm	
DEPTH	789mm	

TEMPERATURE RANGE	+55°C – +95°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

- High energy efficiency: 4.15 kWh per hour (average)
- Cabinet operating temperature range +55°C – +95°C
- Recommended core product temperature +65°C – +80°C
- Smart display with double-glazed glass encased in brushed stainless steel frame

Tilt Front or Sliding Doors Heated Display

- Three tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000-hour LED lighting system at 2758 lumens per meter in cabinet top and to each shelf
- Unique shelf-mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and tilt front or sliding door options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency and durability
- Low wattage density element provides even temperature distribution
- Designed to be installed into joinery
- Fitted with adjustable 150mm legs (+30mm adjustment)

Showing: Inline 5000 Series heated 1800mm curved freestanding tilt front.

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Shelf trays: Toughened safety glass or mild steel.
- Colour and wood print options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to the base: 30mm
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors, or unidirectional rollers
- External stainless steel chassis surround
- Rear deck assemblies
- Custom joinery solution

SPECIFICATIONS

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-5H18-CU-XX-FS	+55°C – +95°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG	HOURS	LUMENS	COLOR
IN-5H18-CU-XX-FS	220-240 V	Single	27.1 A	99.6	4.15	IP 22	Fixed wiring 1	N/A	25,000	2758 per metre	Natural

1. Please see the manual for more information.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-5H18-CU-TF-FS	2.2 m ²	3 Shelves	Tilt front	Sliding doors	Stainless 304 and mild steel
IN-5H18-CU-SD-FS	2.2 m ²	3 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-5H18-CU-XX-FS	1443 x 1807 x 789	195 kg

- Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation

Installation note

- Model cutout dimensions: IN-5H18-CU-XX-FS models require a 1760 x 725mm benchtop cutout.
- Joinery height 603mm (see product manual for installation guide).

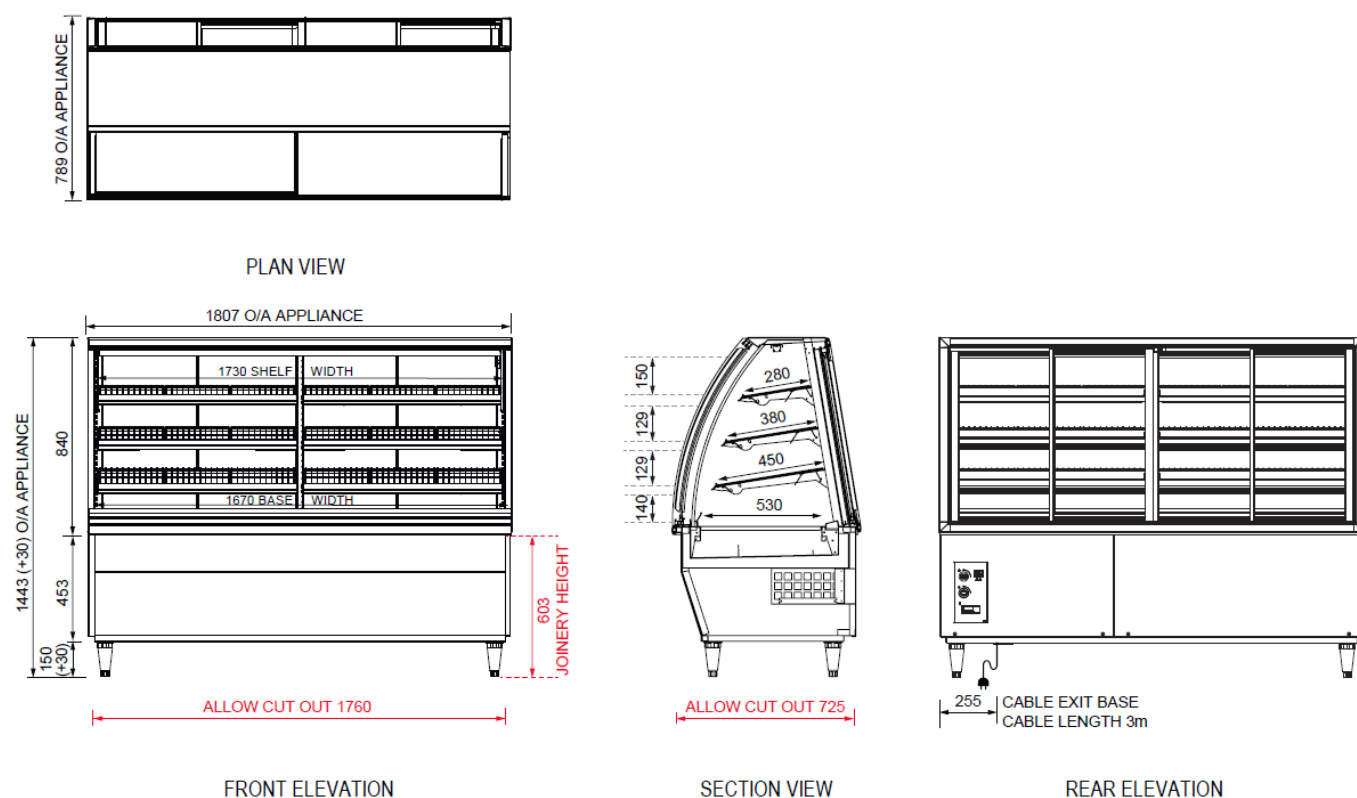

More information

- More information including technical data and installation guidelines is available from the Product Manual

published on our website.

- In line with our policy to continually develop, improve, and support our products, Future Products Group Ltd reserves the right to change specifications and designs without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region. FPGWORLD.COM

Worldwide contact details:

© 2024 Future Products Group Limited



Documents / Resources

	FPG IN-5H18-CU-TF-FS Series Food Display Solutions [pdf] Owner's Manual IN-5H18-CU-TF-FS, IN-5H18-CU-SD-FS, IN-5H18-CU-XX-FS, IN-5H18-CU-TF-FS Series Food Display Solutions, IN-5H18-CU-TF-FS Series, Food Display Solutions, Display Solutions, Solutions
--	--

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.