



FPG IN-VH12-A002  
Upright Heated  
Display



# FPG IN-VH12-A002 Upright Heated Display Owner's Manual

[Home](#) » [FPG](#) » FPG IN-VH12-A002 Upright Heated Display Owner's Manual 

## Contents

- [1 FPG IN-VH12-A002 Upright Heated Display](#)
- [2 FEATURES](#)
- [3 OPTIONS & ACCESSORIES](#)
- [4 HEATED DATA](#)
- [5 ELECTRICAL DATA](#)
- [6 CAPACITY, ACCESS & CONSTRUCTION](#)
- [7 DIMENSIONS](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)



**FPG IN-VH12-A002 Upright Heated Display**



**UPRIGHT 1200 OPEN FRONT**  
**HEATED WITH 3 SHELVES**

<b>RANGE</b>	VISAIR UPRIGHT
<b>TEMPERATURE</b>	HEATED
<b>MODEL</b>	IN-VH12-A002
<b>FRONT</b>	OPEN FRONT
<b>INSTALLATION</b>	FREESTANDING/ROLLERS
<b>HEIGHT</b>	1480mm
<b>WIDTH</b>	1265mm
<b>DEPTH</b>	736mm

<b>TEMPERATURE RANGE</b>	+65°C – +85°C
<b>RECOMMENDED CORE PRODUCT TEMPERATURE</b>	+65°C – +80°C
<b>ENVIRONMENTAL TEST CONDITIONS</b>	22°C / 65% RH

**FEATURES**

- High energy efficiency: 2.95 kWh per hour (average)
- Cabinet operating temperature range +65°C – +85°C Recommended core product temperature +65°C – +80°C
- Robust open front display, powder coated satin black for a sleek finish

**Open Front Heated Display**

- Four full-width display levels: three fixed IWave quartz infrared shelves and heated base
- Each IWave shelf is brushed stainless steel and is fitted with ticket strip to front: 30mm (height), with caution decal applied. Each shelf is supplied with 2x 575mm width removable aluminium drip trays
- Pluggable 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf

## Operational Excellence

- Easy 'plug and play' installation
- FPG IWave heating technology uses low-wattage quartz infrared elements complemented with a heating coil in the base for even temperature distribution and extended shelf life
- Fitted with an electronic controller for energy efficiency
- Safer for consumers – display surfaces are maintained < + 65°C and the internal air temperature is lower than in many fan-assisted cabinets
- No noise pollution – this cabinet runs silently
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Fitted with protective black buffer rail at base front and sides
- Fitted with unidirectional rollers and adjustable stabilisers
- Showing : Visair Upright heated 1200mm freestanding open front cabinet with three IWave shelves and base

## OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Drip trays: Colour and wood print options available
- Custom colour
- Branded decals
- Lockable castors
- Custom joinery solution

## HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	IWAVE HEATING
IN-VH12-A002	+65°C – +85°C	+65°C – +80°C	22°C / 65% RH	Low-wattage infrared quartz elements

## ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT1	E24H2(kWh)	kWh per hour average	kWh per hour per m2	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG3	HOURS	LUMENS	COLOR
IN-VH12-A002	220-240 V	Single	17.1 A	70.74	2.95	1.47	Fixed wiring3	N/A	25,000	2758 per metre	Natural

1. Current is the maximum potential current draw at 240v with +5% element tolerance.
2. Nominal power consumption per 24h. i.e: 230V at 0% energy tolerance.
3. Please see manual for more information.


CAPACITY, ACCESS & CONSTRUCTION


MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION	IP RATING
IN-VH12-A002	2.00 m2	3 Shelves + Base	Open front	N/A	Stainless 304 and mild steel	IP 22

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-VH12-A002	1480 x 1265 x 736	195 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

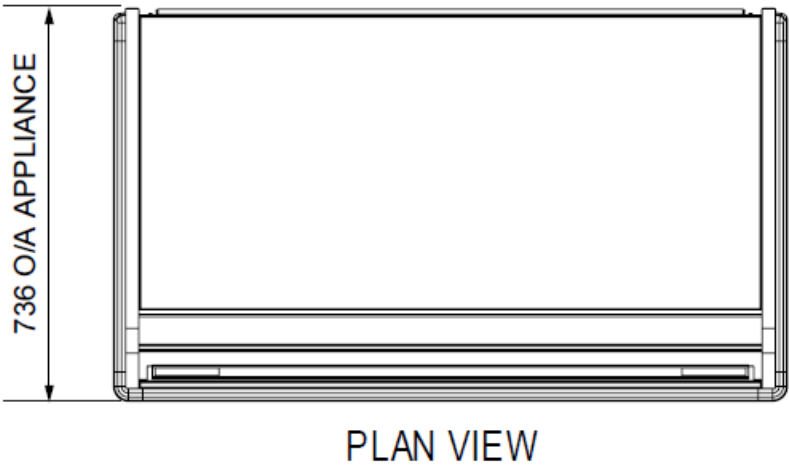


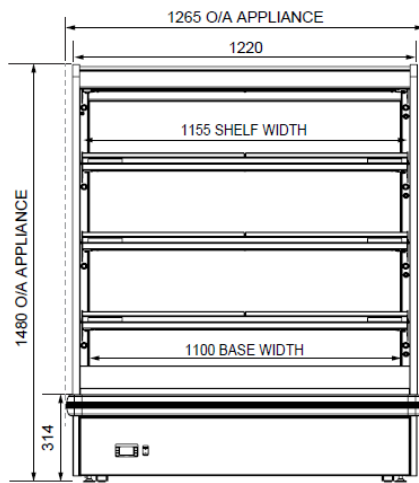

FRONT ELEVATION

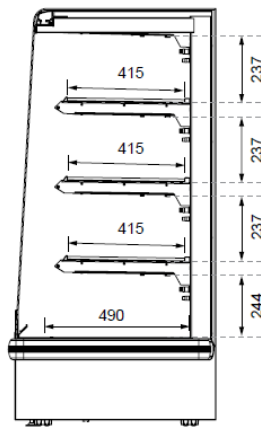

SECTION VIEW

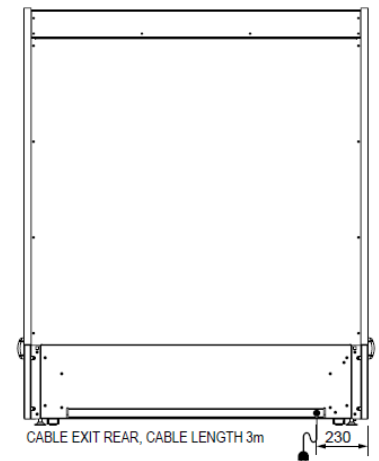

REAR ELEVATION

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region. 07/24 © 2024 Future Products Group Limited

Worldwide  
contact  
details:



[FPGWORLD.COM](http://FPGWORLD.COM)

## FAQ

- **Q: What is the recommended core product temperature for this unit?**

A: The recommended core product temperature is not specified in the manual. It is advised to monitor and adjust based on your specific product requirements.


- **Q: Can I adjust the height of the shelves?**

A: The shelves are fixed and cannot be adjusted in height. Ensure proper product placement for efficient heating.

- **Q: How do I access technical data and installation guidelines?**

A: More information, including technical data and installation guidelines, is available in the Product Manual published on the manufacturer’s website.

**Documents / Resources**

	<p><a href="#">FPG IN-VH12-A002 Upright Heated Display</a> [pdf] Owner's Manual IN-VH12-A002, IN-VH12-A002 Upright Heated Display, IN-VH12-A002, Upright Heated Display, Heated Display</p>
---	---

**References**

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

**Manuals+.** [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.