

**FPG**

**INLINE 3000  
Series  
1200  
Freestanding  
Square  
Heated  
Display**



# FPG INLINE 3000 Series 1200 Freestanding Square Heated Display Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series 1200 Freestanding Square Heated Display Owner's Manual 

## Contents

- [1 FPG INLINE 3000 Series 1200 Freestanding Square Heated Display](#)
- [2 Product Specifications](#)
- [3 Product Usage Instructions](#)
- [4 FAQs](#)
- [5 Specifications](#)
- [6 FEATURES](#)
- [7 OPTIONS & ACCESSORIES](#)
- [8 DIMENSIONS](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)



**FPG INLINE 3000 Series 1200 Freestanding Square Heated Display**



## Product Specifications

- **Model:** 3000 SERIES 1200
- **Type:** Freestanding/Square Heated Range Temperature
- **Installation Height:** 1272mm
- **Width:** 1200mm
- **Depth:** 662mm
- Recommended Core Product Temperature
- **Heating:** Low wattage density element
- **Electrical Data:** 220-240 V Single Phase, 7.1 A, E24H (kWh) 26.4
- **Display Area:** 0.67 m<sup>2</sup>
- **LED Lighting:** 25,000 hours, 2758 lumens per meter
- **IP Rating:** IP 20

## Product Usage Instructions

### Installation:

1. Ensure the model cutout dimensions are met: 1208 x 668 benchtop cutout with a joinery height of 652mm.
2. Follow the product manual for installation guidelines provided on the website.

### Operating Instructions:

1. Plug in the appliance to a suitable power outlet with the provided 10 amp, 3 pin plug.
2. Turn on the appliance using the designated power switch.
3. Adjust the temperature settings to achieve the desired core product temperature.

**Maintenance:**

- 1. Regularly clean the display area and shelves with a mild detergent and water solution.
- 2. Check the LED lighting system for any issues and replace if necessary.

**FAQs**

**Q: Can I adjust the height of the shelves?**

A: Yes, the shelves are tiltable and height-adjustable to support maximum display capacity.

**Q: What is the energy efficiency of the appliance?**

A: The appliance has high energy efficiency, consuming 1.1 kWh per hour on average.

**Q: How do I change the plug specification for different countries?**

A: Please advise your country to change the plug specification by contacting FPG to discuss your requirements.

**Specifications**

RANGE	INLINE 3000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-3H12-SQ-FF-FS	IN-3H12-SQ-SD-FS
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	FREESTANDING	
HEIGHT	1272mm	
WIDTH	1200mm	
DEPTH	662mm	

<b>TEMPERATURE RANGE</b>	+30°C – +90°C
<b>RECOMMENDED CORE PRODUCT TEMPERATURE</b>	+65°C – +80°C
<b>ENVIRONMENTAL TEST CONDITIONS</b>	22°C / 65% RH

## FEATURES

**High energy efficiency: 1.1 kWh per hour (average)**

**Cabinet operating temperature range +30°C – +90°C Recommended core product temperature +65°C – +80°C**

- Smart display with double-glazed glass finished with a black trim

### Fixed Front or Sliding Doors Heated Display

- Two tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000-hour LED lighting system at 2758 lumens per meter in cabinet top
- Unique shelf-mounted ticket strip front and rear: 30mm

### Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Fitted with adjustable 150mm legs (+30mm adjustment)

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to base: 30mm

- 25,000 hour LED lighting to shelves

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3H12-SQ-XX-FS	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour ( average )	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3H12-SQ-XX-FS	220-240 V	Single	7.1 A	26.4	1.1	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

1. Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour ( average )	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3H12-SQ-XX-FS	220-240 V	Single	7.1 A	26.4	1.1	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3H12-SQ-XX-FS	1272 x 1200 x 662	– kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

### Installation note

Model cutout dimensions: IN-3H12-SQ-XX-FS models require 1208 x 668 benchtop cutout. Joinery height 652mm (see product manual for installation guide)

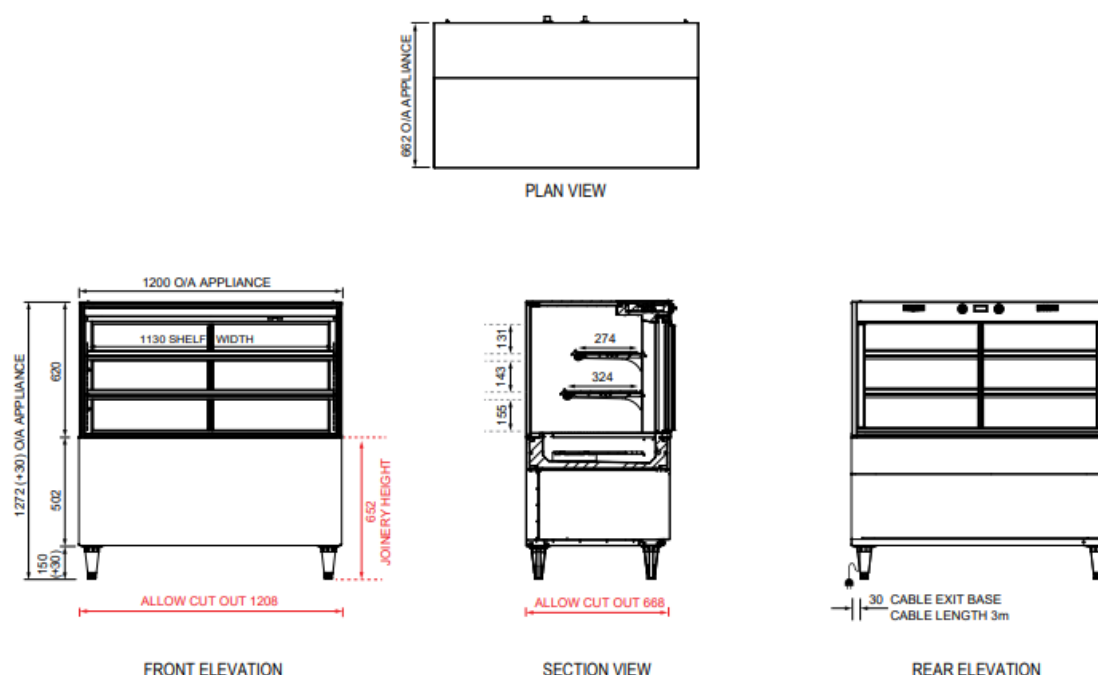

More information including technical data and installation guidelines is available from the Product Manual published on our website.


In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

### Worldwide contact details:



## Documents / Resources

	<p><a href="#">FPG INLINE 3000 Series 1200 Freestanding Square Heated Display</a> [pdf] Owner's Manual INLINE 3000 Series, INLINE 3000 Series 1200 Freestanding Square Heated Display, 1200 Free standing Square Heated Display, Square Heated Display, Heated Display, Display</p>
---	---

## References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

### Manuals+, [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.