



**Inline 3000
Series 1200
In-counter
Square
Ambient**



FPG Inline 3000 Series 1200 In-counter Square Ambient Owner's Manual

[Home](#) » [FPG](#) » FPG Inline 3000 Series 1200 In-counter Square Ambient Owner's Manual 

Contents

- [1 FPG Inline 3000 Series 1200 In-counter Square Ambient](#)
- [2 Product Usage Instructions](#)
- [3 Frequently Asked Questions](#)
- [4 Specifications](#)
- [5 FEATURES](#)
- [6 OPTIONS & ACCESSORIES](#)
- [7 DIMENSIONS](#)
- [8 More information](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



FPG Inline 3000 Series 1200 In-counter Square Ambient



Specifications

- **Model:** IN-3A12-SQ-XX-IC
- **Core Product Temperature:** Ambient
- **Electrical Data:**
 - **Voltage:** 220-240 V Single
 - **Phase:** 1
 - **Current:** 0.17 A
 - **E24H (kWh):** 0.94 kWh per hour (average)
 - **IP Rating:** IP 20
 - **Mains Connection:** 3 metres, 3 core cable 10 amp, 3-pin plug
- **Led Lighting:**
 - **Hours:** 50,000
 - **Lumens:** 2758 per metre
 - **Colour:** Natural
- **Capacity, Access & Construction:**
 - **Display Area:** 1.3 m²
 - **Levels:** 2 Shelves + Base
 - **Chassis Construction:** Stainless 304 and mild steel
- **Dimensions:** 771 x 1200 x 662 mm (Uncrated)

Product Usage Instructions

Installation

Refer to the product manual for detailed installation guidelines. Cutout dimensions are 1178 x 650mm for benchtop installation. When placing the cabinet next to an Inline 3000 Series refrigerated cabinets, use a thermal divider panel between them.

Features

- High energy efficiency with an average consumption of 0.039 kWh per hour.
- Comes with two tiltable, height-adjustable stainless steel shelves and a base that supports maximum display capacity.

- Equipped with a durable construction of stainless and mild steel, along with toughened safety glass.

Operational Excellence

The cabinet offers sliding doors on the staff side and options for fixed front or sliding doors on the customer side, providing operational flexibility.

Maintenance & Cleaning

Regularly clean the cabinet using a mild detergent and a soft cloth. Ensure proper maintenance of the LED lighting system for optimal performance.

Frequently Asked Questions

- **Q: How do I change the plug specification for different countries?**
 - **A:** Please advise your country when purchasing to have the plug specification adjusted accordingly.
- **Q: Where can I find more technical information?**
 - **A:** Additional technical data and installation guidelines are available in the Product Manual on our website at www.fpgworld.com.

Specifications

RANGE	INLINE 3000 SERIES	
TEMPERATURE	AMBIENT	
MODEL	IN-3A12-SQ-FF-IC	IN-3A12-SQ-SD-IC
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
HEIGHT	771mm	
WIDTH	1200mm	
DEPTH	662mm	

- CORE PRODUCT TEMPERATURE
 - AMBIENT

FEATURES

- High energy efficiency: 0.039 kWh per hour (average)
- Cabinet operating at ambient temperature
- Smart display with double-glazed glass finished with a black trim
- Fixed Front or Sliding Doors Ambient Display
- Two tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000-hour LED lighting system at 2758 lumens per metre in cabinet top

- Unique shelf-mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel for durability with fully double-glazed, toughened safety glass
- Fan-assisted air circulation to mitigate heat build-up
- Designed to be installed into joinery
- **Showing:** Inline 3000 Series ambient 1200mm square in-counter fixed front

OPTIONS & ACCESSORIES

- Contact an [FPG Sales Representative](#) for our full range, including.
- **Shelf trays:** Toughened safety glass or mild steel. Colour and wood print options available for steel shelf trays
- 50,000-hour LED lighting on shelves
- Angled base insert
- Branded decals
- Rear door or end glass mirror application
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution
- Please contact FPG to discuss your requirements for meeting country-specific standards.



Specifications

AMBIENT DATA

MODEL	CORE PRODUCT TEMPERATURE
IN-3A12-SQ-XX-IC	Ambient

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3A12-SQ-XX-IC	220-240 V	Single	0.17 A	0.94	0.039	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural

Please advise the country to change the plug specification.


CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3A12-SQ-FF-IC	1.3 m2	2 Shelves + Base	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3A12-SQ-SD-IC	1.3 m2	2 Shelves + Base	Sliding doors	Sliding doors	Stainless 304 and mild steel

DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3A12-SQ-XX-IC	771 x 1200 x 662	– kg

- Crated weights and dimensions vary. Please contact us for information on your shipment.

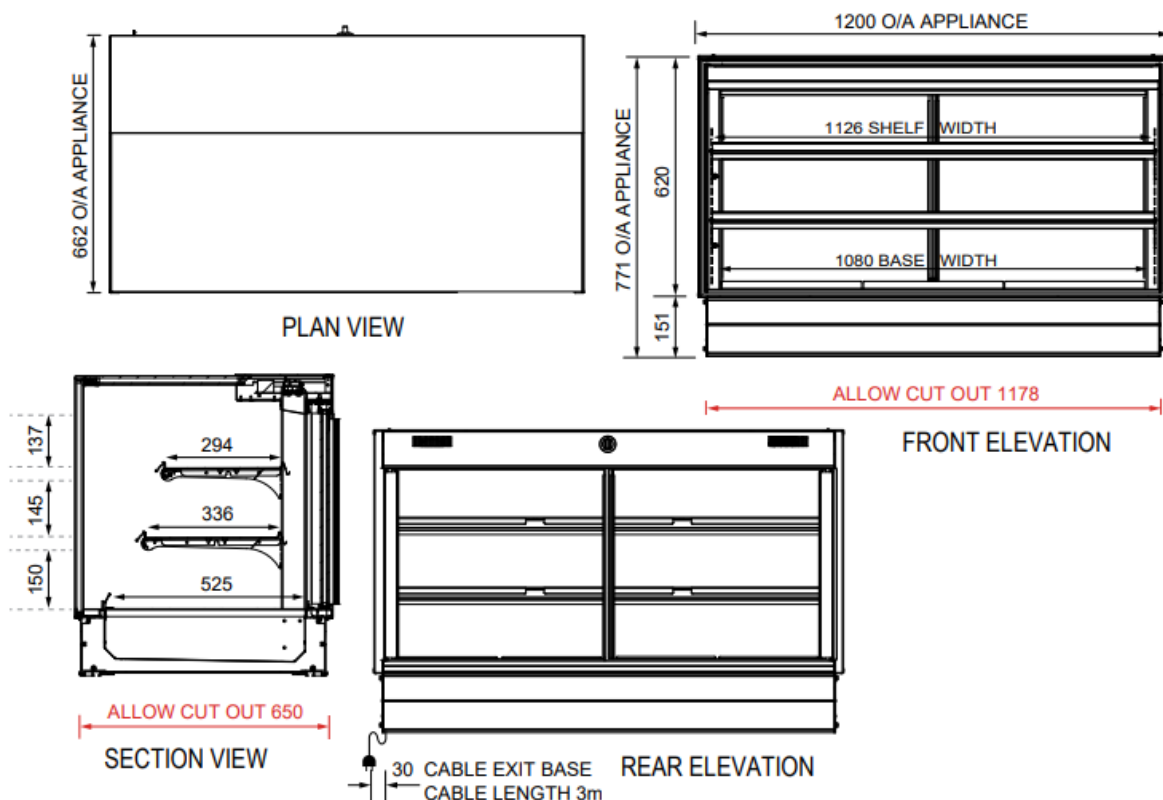

Installation note;

- **Model cutout dimensions:** IN-3A12-SQ-XX-IC models require an 1178 x 650mm benchtop cutout (see product manual for installation guide).
- When installing this cabinet next to an adjacent Inline 3000 Series refrigerated cabinet, please install an Inline 3000 Series thermal divider panel (accessory) between them.

More information

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.
- 12/24 © 2024 Future Products Group Limited
- **Worldwide contact details:**
- FPGWORLD.COM



Documents / Resources

	FPG Inline 3000 Series 1200 In-counter Square Ambient [pdf] Owner's Manual IN-3A12-SQ-FF-IC, IN-3A12-SQ-SD-IC, IN-3A12-SQ-XX-IC, Inline 3000 Series 1200 In-counter Square Ambient, Inline 3000 Series, 1200 In-counter Square Ambient, In-counter Square Ambient, Square Ambient, Ambient
---	--

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.