



**INLINE 3000  
Series 1200 On  
Counter  
Curved Heated  
Display**



# FPG INLINE 3000 Series 1200 On Counter Curved Heated Display Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series 1200 On Counter Curved Heated Display Owner's Manual 

## Contents

- [1 FPG INLINE 3000 Series 1200 On Counter Curved Heated Display](#)
- [2 Product Usage Instructions](#)
- [3 FAQ](#)
- [4 SPECIFICATION](#)
- [5 FEATURED](#)
- [6 OPTIONS & ACCESSORIES](#)
- [7 TECHNICAL SPECIFICATION](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)



**FPG INLINE 3000 Series 1200 On Counter Curved Heated Display**



## Specifications

- Model: 3000 SERIES 1200
- Installation: On-Counter/Curved Heated
- Dimensions:
  - Height: 770mm
  - Width: 1203mm
  - Depth: 663mm
- Temperature Range: Recommended Core Product Temperature
- Features:
  - Fixed Front or Sliding Doors Heated Display
  - Three tilttable, height-adjustable stainless steel wire rack shelves
  - 25,000 hour LED lighting system at 2758 lumens per metre
  - Operational Excellence

## Product Usage Instructions

### Installation

1. Place the unit on a flat, stable surface with proper ventilation.
2. Ensure the power supply meets the electrical data requirements.

### Operation

1. Plug in the appliance using the provided 3-core cable and 3-pin plug.
2. Adjust the temperature settings to achieve the desired core product temperature.

### Cleaning and Maintenance

1. Regularly clean the display area, shelves, and glass panels with a mild detergent and soft cloth.
2. Check and replace any faulty LED lights promptly to maintain optimal lighting.

## FAQ

### Q: Can I change the plug specification?

A: Yes, please advise your country when purchasing to have the plug specification changed.

### Q: How do I access the rear of the appliance?

A: For the model with sliding doors, access to the rear is through the sliding doors on the back side of the appliance.

## SPECIFICATION

<b>RANGE</b>	INLINE 3000 SERIES	
<b>TEMPERATURE</b>	HEATED	
<b>MODEL</b>	IN-3H12-CU-FF-OC	IN-3H12-CU-SD-OC
<b>FRONT</b>	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
<b>INSTALLATION</b>	ON-COUNTER	
<b>HEIGHT</b>	770mm	
<b>WIDTH</b>	1203mm	
<b>DEPTH</b>	663mm	

<b>TEMPERATURE RANGE</b>	+30°C – +90°C
<b>RECOMMENDED CORE PRODUCT TEMPERATURE</b>	+65°C – +80°C
<b>ENVIRONMENTAL TEST CONDITIONS</b>	22°C / 65% RH

## FEATURED

- High energy efficiency: 1.1 kWh per hour (average)
- Cabinet operating temperature range +30°C – +90°C Recommended core product temperature +65°C – +80°C
  - Smart display with toughened safety glass encased in brushed stainless steel frame

### Fixed Front or Sliding Doors Heated Display

- Three tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top
  - Unique shelf mounted ticket strip front and rear: 30mm
  - Extrusions at the top and bottom of the cabinet – front only -are fitted with stainless steel panels that can be replaced with branded inserts

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with toughened safety glass and double-glazed end panels for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
  - Positioned on counter top

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to base: 30mm
- 25,000 hour LED lighting to shelves
- Branded decals/insert
- Rear door or end glass mirror application
- Forward-facing controls
- Custom joinery solution

TECHNICAL SPECIFICATION

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3H12-CU-XX-OC	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3H12-CU-XX-OC	220-240 V	Single	7.2 A	26.4	1.1	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

1Please advise country to change plug specification.


## CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3H12-CU-FF-OC	1.0 m2	3 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3H12-CU-SD-OC	1.0 m2	3 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel


## DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3H12-CU-XX-OC	770 x 1203 x 663	92 kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

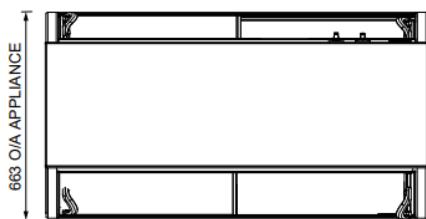


PLAN VIEW

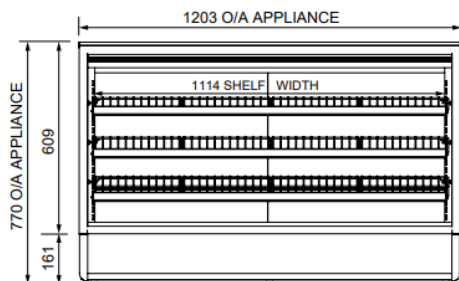

FRONT ELEVATION



SECTION VIEW

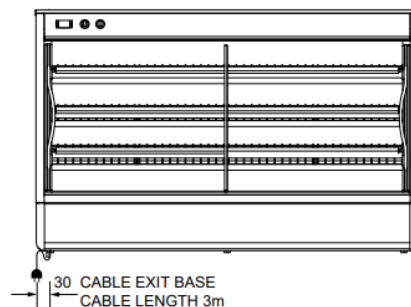

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

12/24 © 2024 Future Products Group Limited

Worldwide  
contact  
details:




[FPGWORLD.COM](http://FPGWORLD.COM)

Please contact FPG to discuss your requirements for meeting country-specific standards.



**Documents / Resources**



[FPG INLINE 3000 Series 1200 On Counter Curved Heated Display](#) [pdf] Owner's Manual  
INLINE 3000 Series, INLINE 3000 Series 1200 On Counter Curved Heated Display, 1200 On C  
ounter Curved Heated Display, Counter Curved Heated Display, Heated Display, Display

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.