



**3000 Series
1500 In-
Counter
Square Heated
Display**



FPG INLINE 3000 Series 1500 In-Counter Square Heated Display Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series 1500 In-Counter Square Heated Display Owner's Manual 

Contents

- [1 FPG INLINE 3000 Series 1500 In-Counter Square Heated Display](#)
- [2 Product Specifications](#)
- [3 Product Usage Instructions](#)
- [4 FAQs](#)
- [5 SPECIFICATION](#)
- [6 FEATURES](#)
- [7 DIMENSIONS](#)
- [8 MORE INFO](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



FPG INLINE 3000 Series 1500 In-Counter Square Heated Display



Product Specifications

- **Model:** IN-3H15-SQ-XX-IC
- **Installation:** In-counter/square heated
- **Dimensions:** 771mm (H) x 1500mm (W) x 662mm (D)
- **Heating Element:** Low wattage density element
- **Capacity:** Display area of 0.85 m2 with 2 shelves
- **Electrical Data:** 220-240V, Single Phase, 7.6A, 31.2 kWh
- **IP Rating:** IP20
- **LED Lighting:** 25,000 hours, 2758 lumens per metre, Natural color
- **Construction:** Stainless 304 and mild steel

Product Usage Instructions

Installation

- Follow the provided product manual for installation guidelines.
- Ensure the benchtop cutout dimensions are 1478mm x 650mm for the IN-3H15-SQ-XX-IC model.

Temperature Control

- Set the recommended core product temperature based on your specific requirements within the temperature range provided.

Cleaning and Maintenance

- Regularly clean the display area and shelves with a mild detergent and soft cloth. Ensure the unit is unplugged before cleaning. Check the heating element for any debris that may affect performance.

Energy Efficiency

- To maximize energy efficiency, ensure the unit is properly insulated and that the doors are closed when not in use. Regularly check for any leaks that may compromise efficiency.

FAQs

1. Can I change the plug specification for different countries?

Yes, please advise your country to change the plug specification accordingly.

2. How do I access technical data and installation guidelines?

You can access the Product Manual published on our website for detailed technical data and installation guidelines. For further assistance, you can contact us via email at sales@fpgworld.com or visit our website for contact details.

SPECIFICATION

RANGE	INLINE 3000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-3H15-SQ-FF-IC	IN-3H15-SQ-SD-IC
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
HEIGHT	771mm	
WIDTH	1500mm	
DEPTH	662mm	

TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

- High energy efficiency: 1.3 kWh per hour (average)
- Cabinet operating temperature range +30°C – +90°C Recommended core product temperature +65°C – +80°C
- Smart display with double-glazed glass finished with a black trim

Fixed Front or Sliding Doors Heated Display

- Two tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per meter in cabinet top
- Unique shelf mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Designed to be installed into joinery

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to base: 30mm
- 25,000 hour LED lighting to shelves
- Branded decals
- Rear door or end glass mirror application
- Forward-facing controls
- Custom joinery solution

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3H15-SQ-XX-IC	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3H15-SQ-XX-IC	220-240 V	Single	7.6 A	31.2	1.3	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

- Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3H15-SQ-FF-IC	0.85 m2	2 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3H15-SQ-SD-IC	0.85 m2	2 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3H15-SQ-XX-IC	771 x 1500 x 662	– kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cutout dimensions: IN-3H15-SQ-XX-IC models require 1478 x 650mm benchtop cutout (see product manual for installation guide)

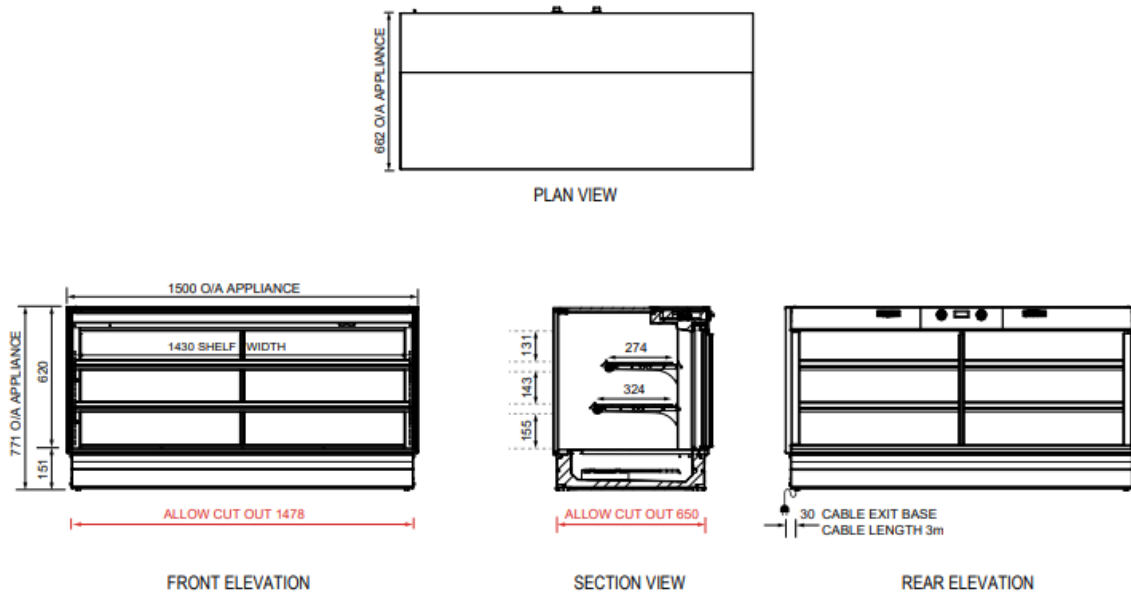

MORE INFO

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

Worldwide contact details



FPGWORLD.COM

Documents / Resources

	<p>FPG INLINE 3000 Series 1500 In-Counter Square Heated Display [pdf] Owner's Manual INLINE 3000 Series, INLINE 3000 Series 1500 In-Counter Square Heated Display, 1500 In-Counter Square Heated Display, Square Heated Display, Heated Display, Display</p>
--	--

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.