



**INLINE 3000
Series 600
Freestanding
Square Heated
Display**



FPG INLINE 3000 Series 600 Freestanding Square Heated Display Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series 600 Freestanding Square Heated Display Owner's Manual 

Contents

- 1 FPG INLINE 3000 Series 600 Freestanding Square Heated Display
- 2 Product Usage Instructions
- 3 FAQ
- 4 Specifications
- 5 FEATURES
- 6 OPTIONS & ACCESSORIES
- 7 DIMENSIONS
- 8 More information
- 9 Documents / Resources
 - 9.1 References



FPG INLINE 3000 Series 600 Freestanding Square Heated Display



Specifications

- **Model:** IN-3H06-SQ-XX-FS
- **Installation Height:** 1272mm
- **Width:** 600mm
- **Depth:** 662mm
- **Heating Element:** Low wattage density
- **Capacity:** 0.31 m2 display area with 2 shelves
- **Electrical Data:** 220-240 V, Single Phase, 3.7 A, 14.4 E24H (kWh)
- **LED Lighting:** 25,000 hours, 2758 lumens per metre
- **Access:** Fixed front or sliding doors (front), sliding doors (rear)
- **Chassis Construction:** Stainless 304 and mild steel

Product Usage Instructions

Installation

Ensure the model cutout dimensions are met: IN-3H06-SQ-XX-FS models require a 608 x 668mm benchtop cutout with a joinery height of 652mm. Refer to the product manual for detailed installation guidelines.

Operation

1. Connect the appliance to a suitable power source using the provided 10 amp, 3 pin plug.
2. Adjust the temperature settings to achieve the recommended core product temperature.
3. Load the product onto the two tiltable, height-adjustable stainless steel wire rack shelves for maximum display capacity.
4. Utilize the sliding doors on the staff side and choose between fixed front or sliding doors on the customer side for access.

Maintenance

Regularly clean the display area, shelves, and glass components using mild detergent and a soft cloth. Ensure the appliance is unplugged before cleaning.

FAQ

- **Q: How do I change the plug specification for different countries?**
 - **A:** Please advise your country to receive guidance on changing the plug specification. Contact FPG for assistance.
- **Q: Are there options and accessories available for this model?**
 - **A:** Contact an FPG Sales Representative for information on the full range of options and accessories available for the 3000 Series 600 Freestanding/Square Heated model.
- **Q: Where can I find more technical data and installation guidelines?**
 - **A:** More information, including technical data and installation guidelines, is available in the Product Manual published on the FPG website.
 - For any specific queries, contact sales@fpgworld.com or visit www.fpgworld.com for detailed contact information.

Specifications

RANGE	INLINE 3000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-3H06-SQ-FF-FS	IN-3H06-SQ-SD-FS
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	FREESTANDING	
HEIGHT	1272mm	
WIDTH	600mm	
DEPTH	662mm	

TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

- **High energy efficiency:** 0.6 kWh per hour (average)
- **Cabinet operating temperature range** +30°C – +90°C
- **Recommended core product temperature** +65°C – +80°C
- **Smart display with double-glazed glass finished** with a black trim

Fixed Front or Sliding Doors Heated Display

- Two tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support a maximum display capacity 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top
- Unique shelf-mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Fitted with adjustable 150mm legs (+30mm adjustment)
- **Showing:** Inline 3000 Series heated 600mm square freestanding fixed front

OPTIONS & ACCESSORIES

- Contact an [FPG Sales Representative](#) for our full range, including.
- **Shelf trays:** Toughened safety glass or mild steel.
- **Colour and** wood print options available for steel shelf trays
- **Stainless steel product** trays with three sides
- **Stainless steel** pie chutes
- **Additional** shelf
- **Ticket strip to the base:** 30mm
- **25,000-hour** LED lighting on shelves
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- Forward facing controls
- Rear deck assemblies
- Custom joinery solution
- Please contact FPG to discuss your requirements for meeting country-specific standards.



HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3H06-SQ-XX-FS	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3H06-SQ-XX-FS	220-240 V	Single	3.7 A	14.4	0.6	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

Please advise country to change the plug specification.


CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3H06-SQ-FF-FS	0.31 m2	2 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3H06-SQ-SD-FS	0.31 m2	2 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3H06-SQ-XX-FS	1272 x 600 x 662	– kg


- Crated weights and dimensions vary. Please contact us for information on your shipment.




PLAN VIEW

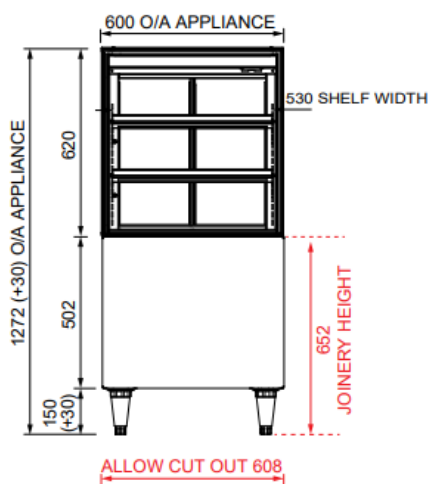

FRONT ELEVATION

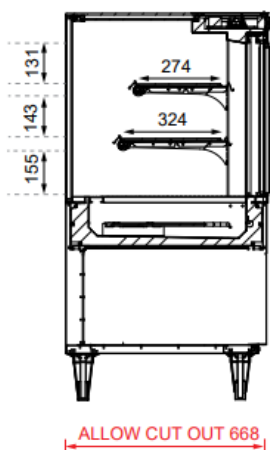

SECTION VIEW

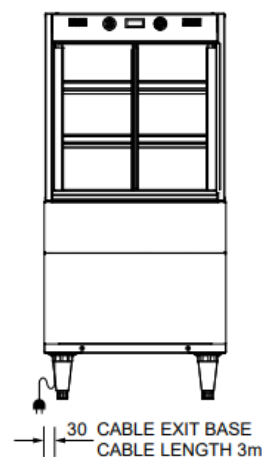

REAR ELEVATION

Installation note;


- **Model cutout dimensions:** IN-3H06-SQ-XX-FS models require a 608 x 668mm benchtop cutout. Joinery height 652mm (see product manual for installation guide).

More information

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.
- 12/24 © 2024 Future Products Group Limited
- **Worldwide contact details:**
- FPGWORLD.COM



Documents / Resources

	<p>FPG INLINE 3000 Series 600 Freestanding Square Heated Display [pdf] Owner's Manual INLINE 3000 Series, INLINE 3000 Series 600 Freestanding Square Heated Display, 600 Freestanding Square Heated Display, Square Heated Display, Heated Display, Display</p>
---	---

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.