



**INLINE 3000
Series 600 On
Counter
Square
Ambient**



FPG INLINE 3000 Series 600 On Counter Square Ambient Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series 600 On Counter Square Ambient Owner's Manual 

Contents

- 1 FPG INLINE 3000 Series 600 On Counter Square Ambient
- 2 Product Usage Instructions
- 3 FAQ
- 4 Specifications
- 5 FEATURES
- 6 OPTIONS & ACCESSORIES
- 7 DIMENSIONS
- 8 More information
- 9 Documents / Resources
 - 9.1 References



FPG INLINE 3000 Series 600 On Counter Square Ambient



Specifications

- **Model:** IN-3A06-SQ-XX-OC
- **Temperature:** Ambient
- **Electrical Data:-**
 - **Voltage:** 220-240 V Single
 - **Phase:** 1
 - **Current:** 0.09 A
 - **E24H (kWh):** 0.50 kWh per hour (average)
- **IP Rating:** IP 20
- **Main Connection:** 3 metres, 3 core cable 10 amp, 3 pin plug
- **LED Lighting:**
 - **Hours:** 50,000
 - **Lumens:** 2758 per metre
 - **Colour:** Natural
- **Capacity, Access & Construction:**
 - **Display Area:** 0.58 m²
 - **Levels:** 2 Shelves + Base
 - **Chassis Construction:** Stainless 304 and mild steel
- **Dimensions:** 777 x 600 x 662 mm (Uncrated)

Product Usage Instructions

Installation

1. Ensure the installation height, width, and depth requirements are met: 777mm height, 600mm width, and 662mm depth.

Setup

1. Connect the appliance to a suitable power source using the provided cable and plug.

Display Configuration

1. Adjust the two tiltable, height-adjustable stainless steel shelves and base to maximize the display capacity.

Cleaning and Maintenance

1. Regularly clean the display area and glass surfaces with a mild detergent and soft cloth.

FAQ

- **Q: Can I change the plug specification for different countries?**
 - **A:** Yes, please advise your country when purchasing to change the plug specification accordingly.
- **Q: Where can I find more technical information and guidelines?**
 - **A:** More technical data and installation guidelines are available in the Product Manual published on our website. You can also contact us at sales@fpgworld.com for further assistance.

Specifications

RANGE	INLINE 3000 SERIES	
TEMPERATURE	AMBIENT	
MODEL	IN-3A06-SQ-FF-OC	IN-3A06-SQ-SD-OC
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	ON-COUNTER	
HEIGHT	777mm	
WIDTH	600mm	
DEPTH	662mm	

- CORE PRODUCT TEMPERATURE
 - AMBIENT

FEATURES

- High energy efficiency: 0.021 kWh per hour (average)
- Cabinet operating at ambient temperature
- Smart display with double-glazed glass finished with a black trim

Fixed Front or Sliding Doors Ambient Display

- Two tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000-hour LED lighting system at 2758 lumens per metre in cabinet top
- Unique shelf-mounted ticket strip front and rear: 30mm
- Extrusions at the bottom of the cabinet – both front and rear -are fitted with stainless steel panels that can be replaced with branded inserts

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel for durability with fully double-glazed, toughened safety glass
- Fan-assisted air circulation to mitigate heat build-up
- Positioned on countertop
- **Showing:** Inline 3000 Series ambient 600mm square on-counter fixed front

OPTIONS & ACCESSORIES

- Contact an [FPG Sales Representative](#) for our full range, including.
- **Shelf trays:** Toughened safety glass or mild steel. Colour and wood print options available for steel shelf trays
- 50,000-hour LED lighting on shelves
- Angled base insert
- Branded decals/inserts
- Rear door or end glass mirror application
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution
- Please contact FPG to discuss your requirements for meeting country-specific standards.



AMBIENT DATA

MODEL	CORE PRODUCT TEMPERATURE
IN-3A06-SQ-XX-OC	Ambient

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3A06-SQ-XX-OC	220-240 V	Single	0.09 A	0.50	0.021	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural

Please advise the country to change the plug specification.


CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3A06-SQ-FF-OC	0.58 m2	2 Shelves + Base	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3A06-SQ-SD-OC	0.58 m2	2 Shelves + Base	Sliding doors	Sliding doors	Stainless 304 and mild steel

DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3A06-SQ-XX-OC	777 x 600 x 662	– kg

- Crated weights and dimensions vary. Please contact us for information on your shipment.

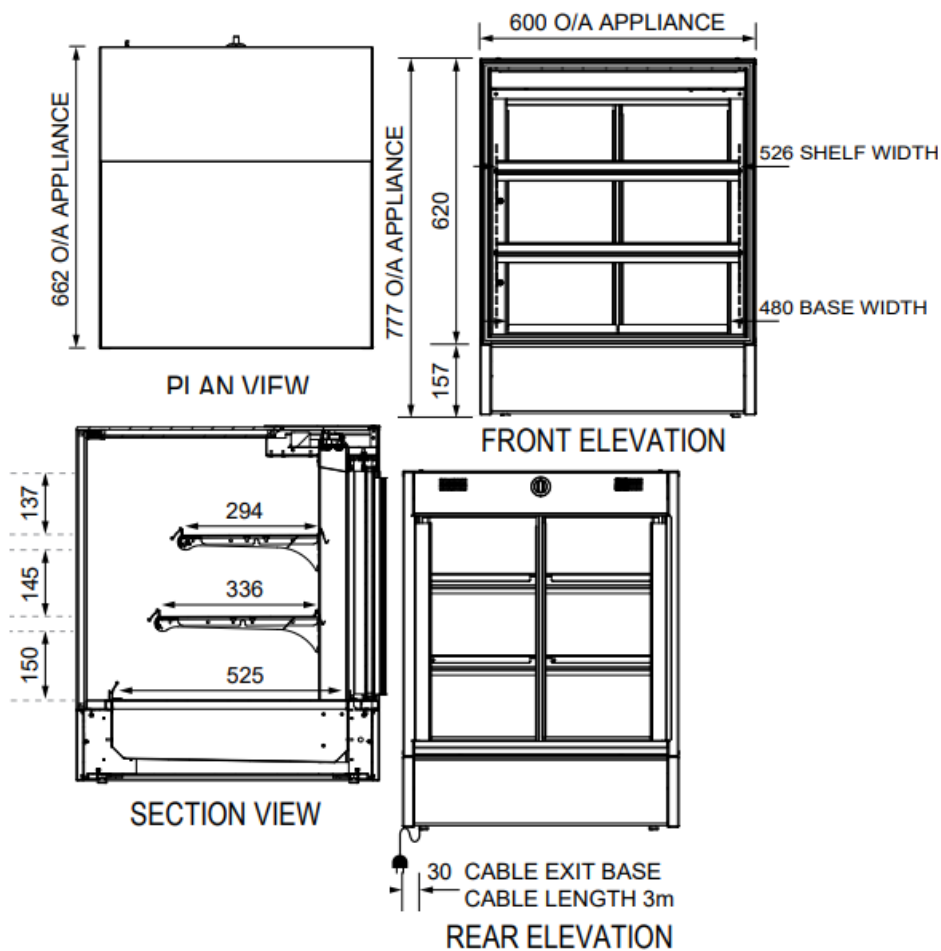

Installation note;


- When installing this cabinet next to an adjacent Inline 3000 Series refrigerated cabinet, please install an Inline 3000 Series thermal divider panel (accessory) between them.

More information

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.
- 12/24 © 2024 Future Products Group Limited
- **Worldwide contact details**
- FPGWORLD.COM



Documents / Resources

	<p>FPG INLINE 3000 Series 600 On Counter Square Ambient [pdf] Owner's Manual IN-3A06-SQ-FF-OC, IN-3A06-SQ-SD-OC, INLINE 3000 Series 600 On Counter Square Ambient, INLINE 3000 Series, 600 On Counter Square Ambient, Counter Square Ambient, Square Ambient, Ambient</p>
---	---

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.