



**Inline 3000 Series
800 In-Counter
Curved Ambient**



FPG Inline 3000 Series 800 In-Counter Curved Ambient Owner's Manual

[Home](#) » [FPG](#) » FPG Inline 3000 Series 800 In-Counter Curved Ambient Owner's Manual 

Contents

- [1 FPG Inline 3000 Series 800 In-Counter Curved Ambient](#)
- [2 Product Usage Instructions](#)
- [3 Maintenance](#)
- [4 FAQ](#)
- [5 FEATURES](#)
- [6 OPTIONS & ACCESSORIES](#)
- [7 Specifications](#)
- [8 Installation](#)
- [9 CONTACT](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



FPG Inline 3000 Series 800 In-Counter Curved Ambient



Product Usage Instructions

Installation

- Refer to the product manual for detailed installation guidelines.
- Ensure the model cutout dimensions are followed for proper installation.

Electrical Connection

- The electrical data for the model indicates a voltage of 220-240 V Single, a current of 0.15 A, and an E24H of 0.72 kWh.
- Make sure to use the specified plug and follow the cable length recommendations.

Capacity & Construction

- The display area is 1.0 m² with 3 shelves + base. Access options include fixed front or sliding doors at the front and sliding doors at the rear.
- The chassis construction consists of Stainless 304 and mild steel.

Maintenance

- Regularly clean the display area and glass panels using appropriate cleaning agents.
- Check for any damages and ensure proper functioning of sliding doors if applicable.

FAQ

- **Q: How do I change the plug specification for different countries?**
 - **A:** Please advise your country when purchasing to change the plug specification accordingly.
- **Q: Where can I find more technical data and installation guidelines?**
 - **A:** More information, including technical data and installation guidelines, is available in the Product Manual published on our website. You can also contact sales@fpgworld.com for further assistance.

3000 SERIES 800 IN-COUNTER/CURVED AMBIENT

RANGE	INLINE 3000 SERIES	
TEMPERATURE	AMBIENT	
MODEL	IN-3A08-CU-FF-IC	IN-3A08-CU-SD-IC
FRONT	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
HEIGHT	761mm	
WIDTH	803mm	
DEPTH	663mm	

- CORE PRODUCT TEMPERATURE AMBIENT

FEATURES

- High energy efficiency: 0.03 kWh per hour (average)
- Cabinet operating at ambient temperature
- Smart display with toughened safety glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Ambient Display

- Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000-hour LED lighting system at 2758 lumens per metre in cabinet top
- Unique shelf-mounted ticket strip front and rear: 30mm
- Extrusion at the top of the cabinet – front only – is fitted with a stainless steel panel that can be replaced with a branded insert

Showing: Inline 3000 Series ambient 800mm curved in-counter fixed front

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding door options (customer side)
- Constructed from stainless and mild steel for durability with toughened safety glass and double-glazed end panels
- Fan-assisted air circulation to mitigate heat build-up
- Designed to be installed into joinery

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel.
- Color and wood print options available for steel shelf trays
- 50,000-hour LED lighting on shelves
- Angled base insert
- Branded decals/insert
- Rear door or end glass mirror application
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution

Please contact FPG to discuss your requirements for meeting country-specific standards.



Specifications

AMBIENT DATA

MODEL	CORE PRODUCT TEMPERATURE
IN-3A08-CU-XX-IC	Ambient

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3A08-CU-XX-IC	220-240 V	Single	0.15 A	0.72	0.03	IP 20	3 meter, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural

- Please advise the country to change the plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3A08-CU-FF-IC	1.0 m2	3 Shelves + Base	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3A08-CU-SD-IC	1.0 m2	3 Shelves + Base	Sliding doors	Sliding doors	Stainless 304 and mild steel

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3A08-CU-XX-IC	761 x 803 x 663	55 kg

- Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation

Installation note

Model cutout dimensions: IN-3A08-CU-XX-IC models require 780 x 645mm benchtop cutout (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 3000 Series refrigerated cabinet, please install an Inline 3000 Series thermal divider panel (accessory) between them.

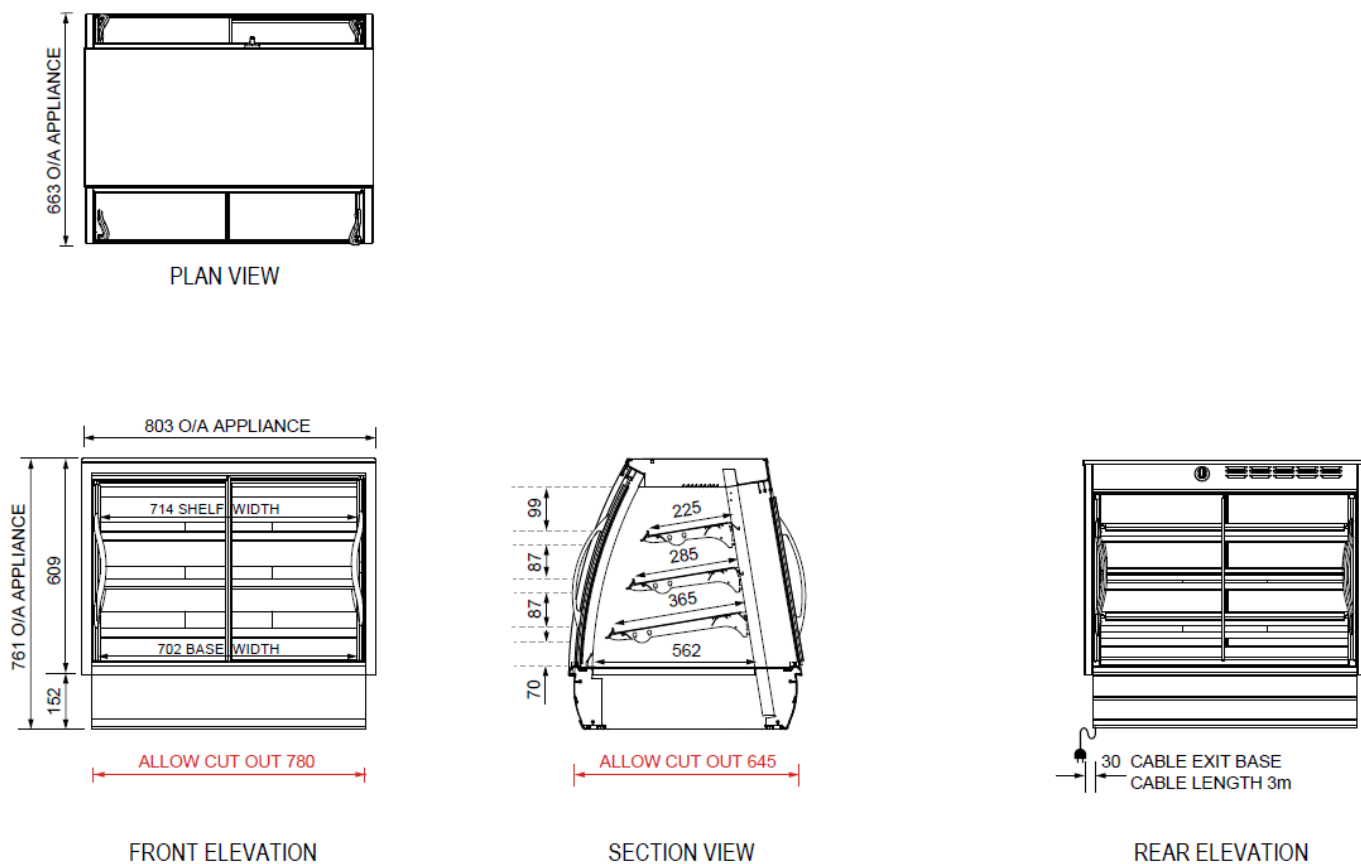

CONTACT


- More information including technical data and installation guidelines is available from the Product Manual

published on our website.

- In line with our policy to continually develop, improve, and support our products, Future Products Group Ltd reserves the right to change specifications and designs without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.
- © 2024 Future Products Group Limited
- Worldwide contact details: FPGWORLD.COM



Documents / Resources

	<p>FPG Inline 3000 Series 800 In-Counter Curved Ambient [pdf] Owner's Manual IN-3A08-CU-FF-IC, IN-3A08-CU-SD-IC, Inline 3000 Series 800 In-Counter Curved Ambient, Inline 3000 Series, 800 In-Counter Curved Ambient, Curved Ambient, Ambient</p>
---	---

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.