

FPG INLINE 3000 Series 800 In-Counter Curved Heated Display Owner's Manual



INLINE

Contents

1 3000 SERIES 800 IN-COUNTER/CURVED HEATED

1.1 FEATURES

1.1.1 Fixed Front or Sliding Doors Heated Display

1.1.2 Operational Excellence

1.2 OPTIONS & ACCESSORIES

1.2.1 HEATED DATA

1.2.2 ELECTRICAL DATA

1.2.3 CAPACITY, ACCESS & CONSTRUCTION

1.2.4 DIMENSIONS

2 Documents / Resources

2.1 References

3 Related Posts

3000 SERIES 800 IN-COUNTER/CURVED HEATED

RANGE	INLINE 3000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-3H08-CU-FF-IC	IN-3H08-CU-SD-IC
FRONT	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
HEIGHT	761mm	
WIDTH	803mm	
DEPTH	663mm	
TEMPERATURE RANGE	+30°C – +90°C	
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C	
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH	



Showing : Inline 3000 Series heated 800mm curved in-counter fixed front

FEATURES



High energy efficiency: 0.63 kWh per hour (average)



Cabinet operating temperature range +30°C – +90°C Recommended core product temperature +65°C – +80°C

- Smart display with toughened safety glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Heated Display



Three tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity



25,000 hour LED lighting system at 2758 lumens per metre in cabinet top

- Unique shelf mounted ticket strip front and rear: 30mm
- Extrusion at the top of the cabinet – front only – is fitted with a stainless steel panel that can be replaced with a branded insert

Operational Excellence



Sliding doors (staff side) and fixed front or sliding doors options (customer side)



Constructed from stainless and mild steel with toughened safety glass and double-glazed end panels for maximum energy efficiency, climate control and durability



Low wattage density element provides even temperature distribution

- Designed to be installed into joinery

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to base: 30mm
- 25,000 hour LED lighting to shelves
- Branded decals/insert
- Rear door or end glass mirror application
- Forward-facing controls
- Custom joinery solution



Indicates
sustainability
benefits



Please contact FPG to discuss your requirements for meeting country-specific standards.

HEATED DATA

MODEL	IN-3H08-CU-XX-IC
TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH
HEATING	Low wattage density element

ELECTRICAL DATA

MODEL		IN-3H08-CU-XX-IC
VOLTAGE		220-240 V
PHASE		Single
CURRENT		3.9 A
E24H (kWh)		15.12
kWh per hour (average)		0.63
IP RATING		IP 20
MAINS	CONNECTION	3 metre, 3 core cable
	CONNECTION PLUG¹	10 amp, 3 pin plug
LED LIGHTING	HOURS	25,000
	LUMENS	2758 per metre
	COLOUR	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	IN-3H08-CU-FF-IC	IN-3H08-CU-SD-IC
DISPLAY AREA	0.62 m ²	0.62 m ²
LEVELS	3 Shelves	3 Shelves
ACCESS FRONT	Fixed front	Sliding doors
ACCESS REAR	Sliding doors	Sliding doors
CHASSIS CONSTRUCTION	Stainless 304 and mild steel	Stainless 304 and mild steel


DIMENSIONS

MODEL	IN-3H08-CU-XX-IC
H x W x D mm (Uncrated)	761 x 803 x 663
MASS (Uncrated)	62 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.


Installation note:

Model cutout dimensions: IN-3H08-CU-XX-IC models require 780 x 645mm benchtop cutout (see product manual for installation guide).

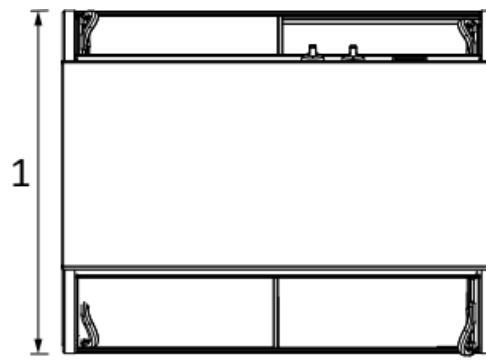


PLAN VIEW

1. 663 O/A APPLIANCE

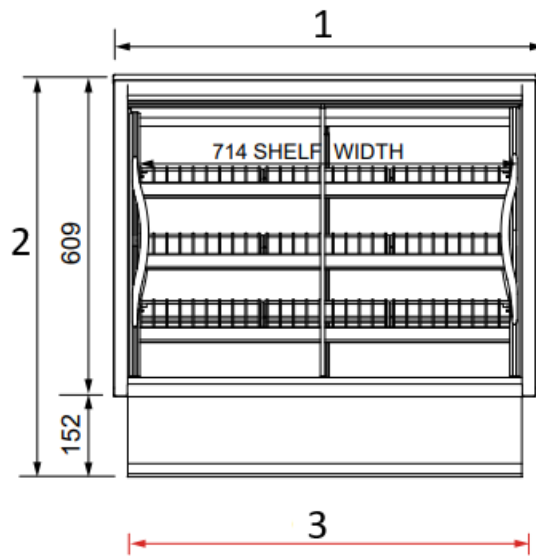


FRONT ELEVATION

- 1. 803 O/A APPLIANCE
- 2. 761 O/A APPLIANCE
- 3. ALLOW CUT OUT 780

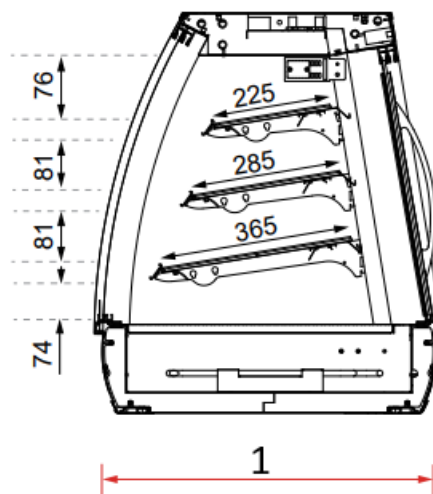

SECTION VIEW

1. ALLOW CUT OUT 645

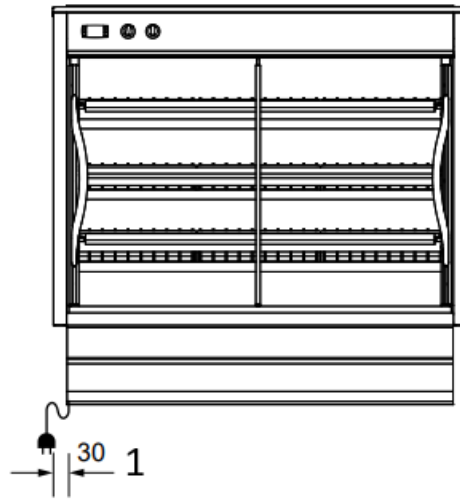

REAR ELEVATION

1. CABLE EXIT BASE CABLE LENGTH 3m

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice. Have a question?

Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

12/24 © 2024 Future Products Group Limited



Worldwide contact details:

FPGWORLD.COM

Documents / Resources

	<p>FPG INLINE 3000 Series 800 In-Counter Curved Heated Display [pdf] Owner's Manual INLINE 3000 Series, INLINE 3000 Series 800 In-Counter Curved Heated Display, 800 In-Counter Curved Heated Display, Curved Heated Display, Heated Display, Display</p>
--	--

References

- [FPG Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.