



**INLINE 3000 Series
900 Freestanding
Square Heated
Display**



FPG INLINE 3000 Series 900 Freestanding Square Heated Display Owner’s Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series 900 Freestanding Square Heated Display Owner’s Manual 

Contents

- [1 FPG INLINE 3000 Series 900 Freestanding Square Heated Display](#)
- [2 Product Usage Instructions](#)
- [3 Cleaning and Maintenance](#)
- [4 FAQ](#)
- [5 FEATURES](#)
- [6 OPTIONS & ACCESSORIES](#)
- [7 Specifications](#)
- [8 Installation](#)
- [9 CONTACT](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



FPG INLINE 3000 Series 900 Freestanding Square Heated Display



Product Usage Instructions

Installation

- Ensure the benchtop cutout dimensions are 908 x 668mm with a joinery height of 652mm.
- Refer to the product manual for detailed installation guidelines.

Operating the Display

- Ensure the appliance is plugged into a suitable power source.
- Adjust the temperature settings to achieve the desired core product temperature.
- Use the front access points for loading and unloading products onto the shelves.

Cleaning and Maintenance

- Regularly clean the display cabinet using a mild detergent and a soft cloth.
- Check and replace any faulty LED lights promptly to maintain optimal lighting conditions.

FAQ

- **Q: Can I adjust the height of the shelves?**
 - **A:** Yes, the two stainless steel wire rack shelves are height-adjustable to accommodate different product sizes.
- **Q: What is the IP rating of the appliance?**
 - **A:** The appliance has an IP rating of IP20, indicating protection against solid objects larger than 12mm and having no harmful effect.

3000 SERIES 900 FREESTANDING/SQUARE HEATED

RANGE	INLINE 3000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-3H09-SQ-FF-FS	IN-3H09-SQ-SD-FS
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	FREESTANDING	
HEIGHT	1272mm	
WIDTH	900mm	
DEPTH	662mm	

TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

- High energy efficiency: 0.6 kWh per hour (average)
- Cabinet operating temperature range +30°C – +90°C
- Recommended core product temperature +65°C – +80°C

- Smart display with double-glazed glass finished with a black trim

Fixed Front or Sliding Doors Heated Display

- Two tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000-hour LED lighting system at 2758 lumens per meter in cabinet top
- Unique shelf-mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding door options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control, and durability
- Low wattage density element provides even temperature distribution
- Fitted with adjustable 150mm legs (+30mm adjustment)

Showing: Inline 3000 Series heated 900mm square freestanding fixed front

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel.
- Color and wood print options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to the base: 30mm
- 25,000-hour LED lighting on shelves
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment),
- lockable castors or unidirectional rollers
- Forward-facing controls
- Rear deck assemblies
- Custom joinery solution

Please contact FPG to discuss your requirements for meeting country-specific standards.



Specifications

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CO RE PRODUCT TEMPER ATURE	ENVIRONMENTAL T EST CONDITIONS	HEATING
IN-3H09-SQ- XX-FS	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLT AGE	PH AS E	CUR REN T	E24 H (kW h)	kWh pe r hour (average)	IP RA TIN G	MAINS		LED LIGHTING		
							CONNECTI ON	CONNECTI ON PLUG1	HOU RS	LUME NS	COL OUR
IN-3H09-SQ- XX-FS	220-2 40 V	Sin gle	3.8 A	14. 4	0.6	IP 2 0	3 meter, 3 c ore cable	10 amp, 3 p in plug	25,0 00	2758 per m etre	Natu ral

- Please advise the country to change the plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONS TRUCTION
IN-3H09-SQ- FF-FS	0.5 m2	2 Shelves	Fixed front	Sliding doors	Stainless 304 an d mild steel
IN-3H09-SQ- SD-FS	0.5 m2	2 Shelves	Sliding doors	Sliding doors	Stainless 304 an d mild steel

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3H09-SQ-XX-FS	1272 x 900 x 662	– kg

- Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation

Installation note

Model cutout dimensions: IN-3H09-SQ-XX-FS models require a 908 x 668mm benchtop cutout. Joinery height 652mm (see product manual for installation guide).

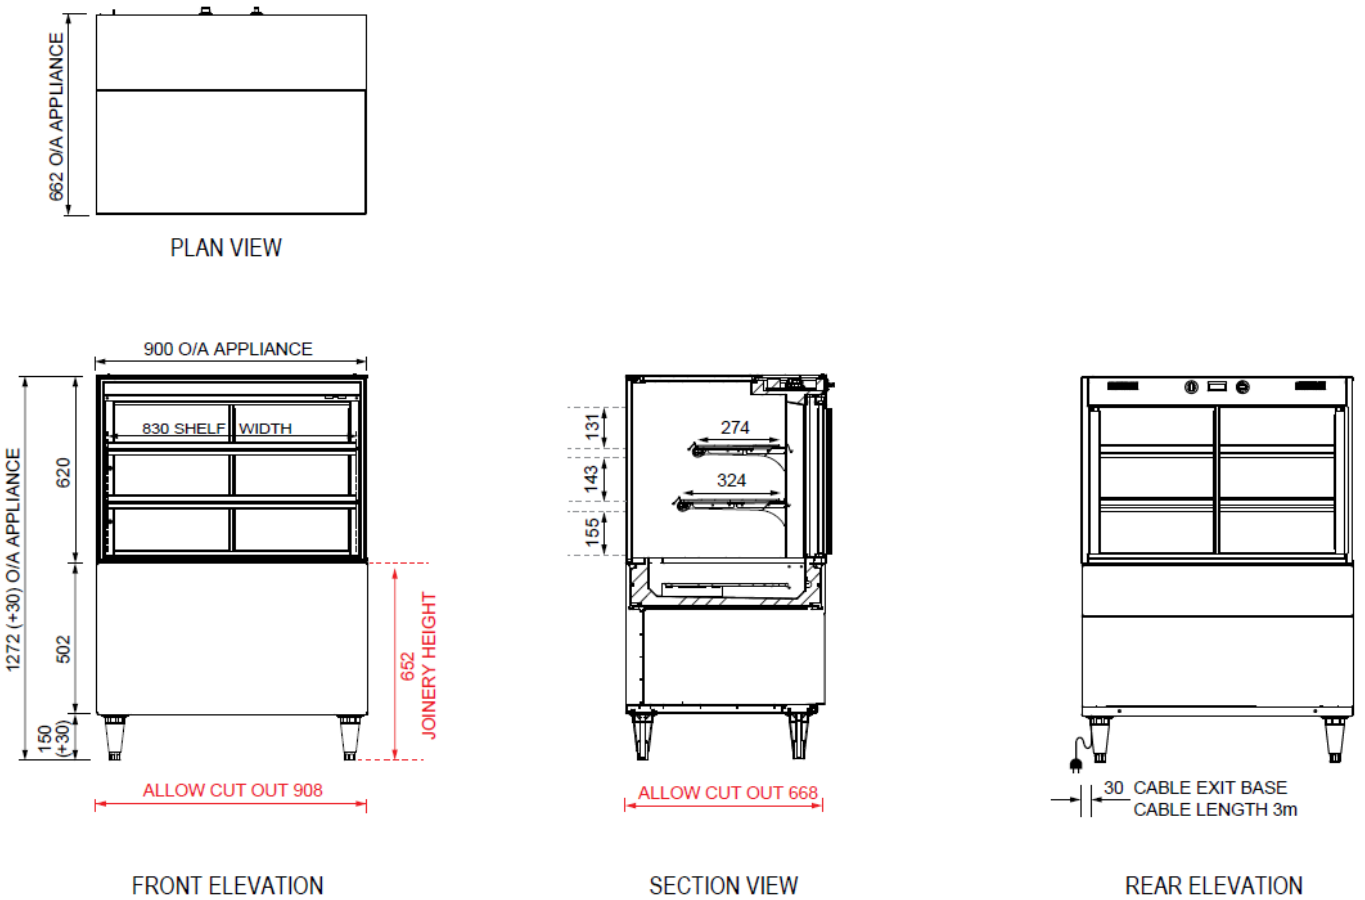


CONTACT

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve, and support our products, Future Products Group Ltd reserves the right to change specifications and designs without notice.
- Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.
- © 2024 Future Products Group Limited
- Worldwide contact details: FPGWORLD.COM



Documents / Resources

	<p>FPG INLINE 3000 Series 900 Freestanding Square Heated Display [pdf] Owner's Manual INLINE 3000 Series, INLINE 3000 Series 900 Freestanding Square Heated Display, 900 Freestanding Square Heated Display, Square Heated Display, Heated Display, Display</p>
---	---

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.