




**INLINE 3000 Series Bain  
Marie 1200 On Counter  
Square Heated Display**



# FPG INLINE 3000 Series Bain Marie 1200 On Counter Square Heated Display Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series Bain Marie 1200 On Counter Square Heated Display Owner's Manual 

## Contents

- [1 FPG INLINE 3000 Series Bain Marie 1200 On Counter Square Heated Display](#)
- [2 Product Usage Instructions](#)
- [3 Temperature Settings](#)
- [4 Cleaning and Maintenance](#)
- [5 FAQ](#)
- [6 FEATURES](#)
- [7 OPTIONS & ACCESSORIES](#)
- [8 Specifications](#)
- [9 Installation](#)
- [10 CONTACT](#)
- [11 Documents / Resources](#)
  - [11.1 References](#)



**FPG INLINE 3000 Series Bain Marie 1200 On Counter Square Heated Display**



## **Product Usage Instructions**

### **Installation**

- The product should be installed on a flat, stable surface with proper ventilation to ensure optimal performance.

### **Temperature Settings**

- Adjust the temperature settings based on the recommended core product temperature for efficient heating.

### **Cleaning and Maintenance**

- Regularly clean the display area and sliding doors using mild detergent and a soft cloth.
- Ensure the product is unplugged before cleaning.

### **Safety Precautions**

- Avoid placing flammable materials near the appliance.
- Do not immerse the product in water or other liquids.

## **FAQ**

- **Q: How do I change the plug specification for different countries?**
  - **A:** Please contact FPG to advise on the country-specific plug requirements and make the necessary changes.
- **Q: Where can I find technical data and installation guidelines?**
  - **A:** More information, including technical data and installation guidelines, is available in the Product Manual published on the FPG website.

## **3000 SERIES BAIN MARIE 1200 ON-COUNTER/SQUARE HEATED**

|                     |                               |
|---------------------|-------------------------------|
| <b>RANGE</b>        | INLINE 3000 SERIES BAIN MARIE |
| <b>TEMPERATURE</b>  | HEATED                        |
| <b>MODEL</b>        | IN-3B12-SQ-FF-OC              |
| <b>FRONT</b>        | SQUARE/FIXED FRONT            |
| <b>INSTALLATION</b> | ON-COUNTER                    |
| <b>HEIGHT</b>       | 777mm                         |
| <b>WIDTH</b>        | 1200mm                        |
| <b>DEPTH</b>        | 662mm                         |

|   |                |
|---|----------------|
| <b>TEMPERATURE RANGE</b>                    | +30°C – +110°C |
| <b>RECOMMENDED CORE PRODUCT TEMPERATURE</b> | +65°C – +80°C  |
| <b>ENVIRONMENTAL TEST CONDITIONS</b>        | 22°C / 65% RH  |

## FEATURES

- High energy efficiency: 1.2 kWh per hour (average)
- Cabinet operating temperature range +30°C – +110°C
- Recommended core product temperature +65°C – +80°C
- Smart display with double-glazed glass finished with a black trim

### Fixed Front Heated Display

- Fitted with halogen heat lamps, with 3000 hour warm white lighting
- Supplied with 3x 1/1 gastronorm dishes 65mm deep
- Extrusions at the bottom of the cabinet – both front and rear – are fitted with stainless steel panels that can be replaced with branded inserts

**Showing:** Inline 3000 Series Bain Marie heated 1200mm square on-counter fixed front

### Operational Excellence

- Sliding doors (staff side) and fixed front (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Dry operation well only
- Positioned on counter top

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Add a holding shelf
- Branded decals/inserts
- Rear door or end glass mirror application
- GN pans (various sizes)
- GN dividers
- Forward-facing controls
- Custom joinery solution

Please contact FPG to discuss your requirements for meeting country-specific standards.



Specifications

HEATED DATA

| MODEL            | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | HEATING  |
|------------------|-------------------|--------------------------------------|-------------------------------|--|
| IN-3B12-SQ-FF-OC | +30°C – +110°C    | +65°C – +80°C                        | 22°C / 65% RH                 | Low wattage density element / 2x 100 watt linear halogen |

ELECTRICAL DATA

| MODEL            | VOLTAGE   | PHASE  | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS                 |                    | HEAT LAMPS                 | HALOGEN LIGHTING |            |
|------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|--------------------|----------------------------|------------------|------------|
|                  |           |        |         |            |                        |           | CONNECTION            | CONNECTION PLUG1   |                            | HOURS            | COLOR      |
| IN-3B12-SQ-FF-OC | 220-240 V | Single | 7.8 A   | 28.8       | 1.2                    | IP 22     | 3 metre, 3 core cable | 10 amp, 3 pin plug | 2x 100 watt linear halogen | 3000             | Warm white |

- Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION


| MODEL            | DISPLAY AREA | NO. OF 1/1 PANS | ACCESS FRONT | ACCESS REAR   | CHASSIS CONSTRUCTION         |
|------------------|--------------|-----------------|--------------|---------------|------------------------------|
| IN-3B12-SQ-FF-OC | 0.45 m2      | 3               | Fixed front  | Sliding doors | Stainless 304 and mild steel |

### DIMENSIONS

| MODEL            | H x W x D mm (Uncrated) | MASS (Uncrated) |
|------------------|-------------------------|-----------------|
| IN-3B12-SQ-FF-OC | 777 x 1200 x 662        | – kg            |

- Crated weights and dimensions vary. Please contact us for information on your shipment.

### Installation

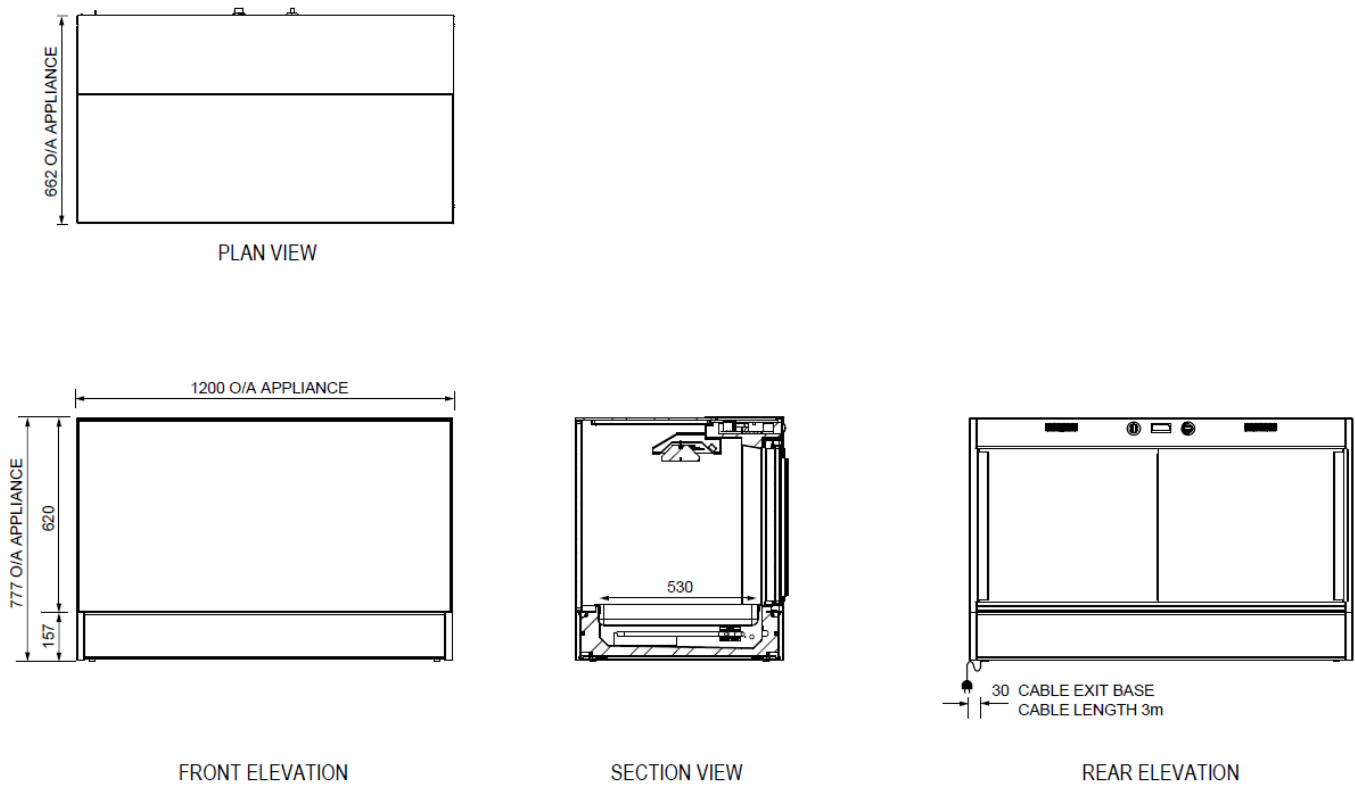


### CONTACT

- More information including technical data and installation guidelines is available from the Product Manual published on our website.
- In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.
- Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.
- © 2024 Future Products Group Limited
- Worldwide contact details: [FPGWORLD.COM](http://FPGWORLD.COM)



Documents / Resources

|   |   |
|---|---|
|  | <p><a href="#">FPG INLINE 3000 Series Bain Marie 1200 On Counter Square Heated Display</a> [pdf] Owner's Manual</p> <p>INLINE 3000 Series, INLINE 3000 Series Bain Marie 1200 On Counter Square Heated Display, Bain Marie 1200 On Counter Square Heated Display, 1200 On Counter Square Heated Display, Square Heated Display, Heated Display, Display</p> |
|---|---|

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.