



FPG INLINE 3000
Series
Freestanding
Square Ambient
Display



FPG INLINE 3000 Series Freestanding Square Ambient Display Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 3000 Series Freestanding Square Ambient Display Owner's Manual 

Contents

- [1 FPG INLINE 3000 Series Freestanding Square Ambient Display](#)
- [2 Product Usage Instructions](#)
- [3 FEATURES](#)
- [4 OPTIONS & ACCESSORIES](#)
- [5 MODEL](#)
- [6 Installation note](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



FPG INLINE 3000 Series Freestanding Square Ambient Display



Specifications

- **Model:** IN-3A09-SQ-XX-FS
- **Temperature:** Ambient
- **Electrical Data:**
 - **Voltage:** 220-240 V Single
 - **Phase:** 1
 - **Current:** 0.14 A
 - **Energy Efficiency:** 0.033 kWh per hour (average)
- **LED Lighting:** 50,000 hours, 2758 lumens per meter, Natural color
- **Capacity:** 0.93 m²
- **Construction:** Stainless 304 and mild steel
- **Dimensions:** 1272 x 900 x 662 mm

Product Usage Instructions

Installation

Refer to the product manual for detailed installation guidelines. Make sure to follow the cutout dimensions provided and joinery height requirements.

If installing next to an Inline 3000 Series refrigerated cabinet, use a thermal divider panel between them.

Cleaning and Maintenance

Regularly clean the display area and glass surfaces with a mild detergent and soft cloth. Ensure the unit is unplugged before cleaning.

RANGE	INLINE 3000 SERIES	
TEMPERATURE	AMBIENT	
MODEL	IN-3A09-SQ-FF-FS	IN-3A09-SQ-SD-FS
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	FREESTANDING	
HEIGHT	1272mm	
WIDTH	900mm	
DEPTH CORE PRODUCT TEMP ERATURE	662mm AMBIENT	

FEATURES

- High energy efficiency: 0.033 kWh per hour (average)
- Cabinet operating at ambient temperature
- Smart display with double-glazed glass finished with a black trim

Fixed Front or Sliding Doors Ambient Display

- Two tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000 hour LED lighting system at 2758 lumens per metre in cabinet top
- Unique shelf mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel for durability with fully double-glazed, toughened safety glass
- Fan assisted air circulation to mitigate heat build-up
- Fitted with adjustable 150mm legs (+30mm adjustment)

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- 50,000 hour LED lighting to shelves
- Angled base insert
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- Forward-facing controls

- Rear deck assemblies
- Thermal divider panels
- Custom joinery solution

AMBIENT DATA

MODEL	CORE PRODUCT TEMPERATURE
IN-3A09-SQ-XX-FS	Ambient

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H(kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3A09-SQ-XX-FS	220-240 V	Single	0.14 A	0.79	0.033	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	50,000	2758 per metre	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION


MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3A09-SQ-FF-FS	0.93 m ²	2 Shelves + Base	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3A09-SQ-SD-FS	0.93 m ²	2 Shelves + Base	Sliding doors	Sliding doors	Stainless 304 and mild steel

DIMENSIONS


MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3A09-SQ-XX-FS	1272 x 900 x 662	– kg

Installation note


Model cutout dimensions: IN-3A09-SQ-XX-FS models require 908 x 668mm benchtop cutout. Joinery height 652mm (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 3000 Series refrigerated cabinet, please install an Inline 3000 Series thermal divider panel (accessory) between them.




PLAN VIEW

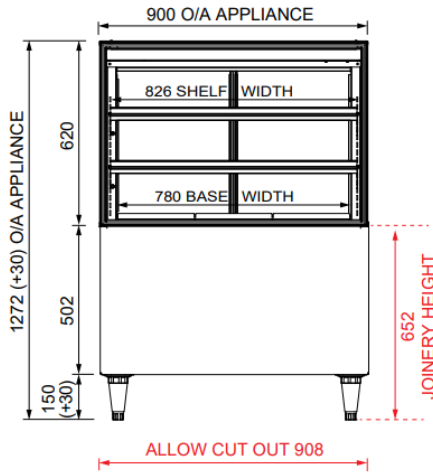

FRONT ELEVATION

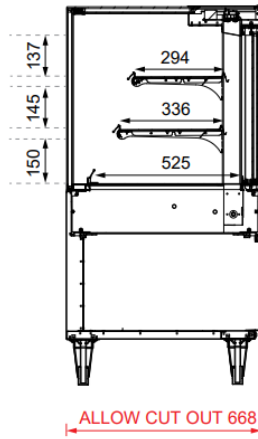

SECTION VIEW

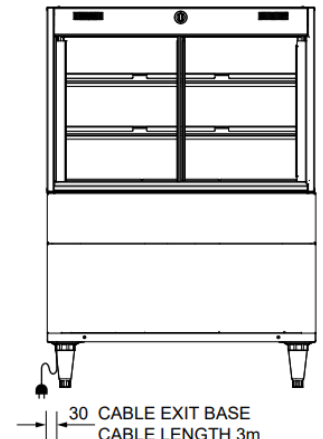

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

12/24 © 2024 Future Products Group Limited

Worldwide contact details: FPGWORLD.COM



Frequently Asked Questions (FAQ)

Q: Can I adjust the shelves in the cabinet?

A: Yes, the shelves are tiltable and height-adjustable for your convenience. Refer to the manual for instructions on adjusting the shelves.


Q: How do I change the plug specification for my country?

A: Please contact FPG to discuss your requirements for changing the plug specification to meet country-specific standards.

Q: What is the IP rating of the appliance?

A: The appliance has an IP rating of 20, indicating protection against solid objects larger than 12.5mm and having no harmful effects.

Documents / Resources

	<p>FPG INLINE 3000 Series Freestanding Square Ambient Display [pdf] Owner's Manual IN-3A09-SQ-FF-FS, IN-3A09-SQ-SD-FS, INLINE 3000 Series Freestanding Square Ambient Display, INLINE 3000 Series, Freestanding Square Ambient Display, Square Ambient Display, Ambient Display, Display</p>
---	--

References

- [FPG Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.