



**Inline 3000
Series On-
counter Square
Heated**



FPG Inline 3000 Series On-counter Square Heated Owner's Manual

[Home](#) » [FPG](#) » FPG Inline 3000 Series On-counter Square Heated Owner's Manual 

Contents

- [1 FPG Inline 3000 Series On-counter Square Heated](#)
- [2 Product Usage Instructions](#)
- [3 FAQ](#)
- [4 SPECIFICATION](#)
- [5 FEATURE](#)
- [6 OPTIONS & ACCESSORIES](#)
- [7 TECHNICAL SPECIFICATION](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)



FPG Inline 3000 Series On-counter Square Heated



Specifications:

- Model: 3000 SERIES 1200
- Type: On-counter/Square Heated Range Temperature
- Installation: Inline 3000 SERIES
- Heated Display Options: Fixed Front (FF) or Sliding Doors (SD)
- Dimensions:
 - Height: 777mm
 - Width: 1200mm
 - Depth: 662mm
- Temperature Range: Recommended core product temperature
- Features:
 - High energy efficiency: 1.1 kWh per hour (average)
 - Two tiltable, height-adjustable stainless steel wire rack shelves
 - 25,000 hour LED lighting system at 2758 lumens per metre
 - Sliding doors (staff side) and fixed front or sliding doors options
 - Constructed from stainless and mild steel with double-glazed safety glass
 - Low wattage density element for even temperature distribution

Product Usage Instructions

Installation:

Follow the installation guidelines provided in the Product Manual available on the website.

Operating the Display:

- Ensure the appliance is connected to a suitable power source.
- Adjust the temperature settings to achieve the desired core product temperature.
- Use the sliding doors on the staff side for access.
- Utilize the adjustable shelves for maximum display capacity.

Maintenance:

- Clean the display regularly using appropriate cleaning agents.
- Inspect the LED lighting system for any issues and replace if necessary.
- Ensure proper climate control and energy efficiency by keeping the doors closed when not in use.

FAQ

Q: Can I change the plug specification for different countries?

A: Yes, please advise the country when purchasing to change the plug specification accordingly.

Q: Where can I find more technical data and guidelines?

A: More information, including technical data and installation guidelines, is available in the Product Manual on our website. You can also contact us for support.

Showing : Inline 3000 Series heated 1200mm square on-counter fixed front

SPECIFICATION

RANGE	INLINE 3000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-3H12-SQ-FF-OC	IN-3H12-SQ-SD-OC
FRONT	SQUARE/ FIXED FRONT	SQUARE/ SLIDING DOORS
INSTALLATION	ON-COUNTER	
HEIGHT	777mm	
WIDTH	1200mm	
DEPTH	662mm	

TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURE

- High energy efficiency: 1.1 kWh per hour (average)
- Cabinet operating temperature range +30°C – +90°C Recommended core product temperature +65°C – +80°C
 - Smart display with double-glazed glass finished with a black trim

Fixed Front or Sliding Doors Heated Display

- Two tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top
 - Unique shelf mounted ticket strip front and rear: 30mm
 - Extrusions at the bottom of the cabinet – both front and rear -are fitted with stainless steel panels that can be replaced with branded inserts

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
 - Positioned on counter top

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with three sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to base: 30mm
- 25,000 hour LED lighting to shelves
- Branded decals/inserts
- Rear door or end glass mirror application
- Forward-facing controls
- Custom joinery solution

TECHNICAL SPECIFICATION

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-3H12-SQ-XX-OC	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-3H12-SQ-XX-OC	220-240 V	Single	7.1 A	26.4	1.1	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

1Please advise country to change plug specification.


CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-3H12-SQ-FF-OC	0.67 m2	2 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-3H12-SQ-SD-OC	0.67 m2	2 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-3H12-SQ-XX-OC	777 x 1200 x 662	– kg


Crated weights and dimensions vary. Please contact us for information on your shipment.

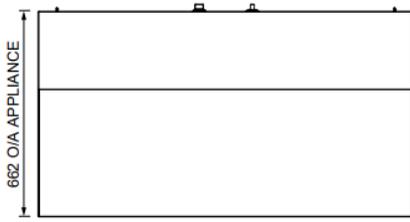


PLAN VIEW

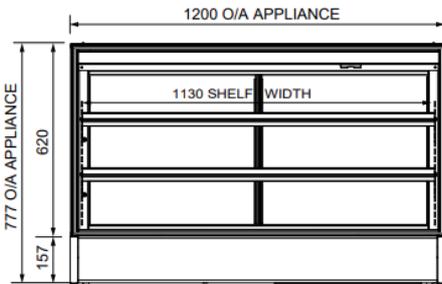

FRONT ELEVATION



SECTION VIEW

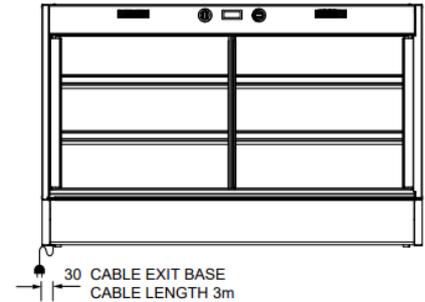

REAR ELEVATION

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

12/24 © 2024 Future Products Group Limited

Worldwide
contact
details:




FPGWORLD.COM

Please contact FPG to discuss your requirements for meeting country-specific standards.



Documents / Resources

	<p>FPG Inline 3000 Series On-counter Square Heated [pdf] Owner's Manual IN-3H12-SQ-FF-OC, IN-3H12-SQ-SD-OC, IN-3H12-SQ-XX-OC, Inline 3000 Series On-counter Square Heated, Inline 3000 Series, On-counter Square Heated, Square Heated</p>
	<p>FPG Inline 3000 Series On-counter Square Heated [pdf] Owner's Manual IN-3H12-SQ-FF-IC, IN-3H12-SQ-SD-IC, IN-3H12-SQ-XX-IC, Inline 3000 Series On-counter Square Heated, Inline 3000 Series, On-counter Square Heated, Square Heated</p>
	<p>FPG Inline 3000 Series On-counter Square Heated [pdf] Owner's Manual IN-3H06-SQ-FF-OC, IN-3H06-SQ-SD-OC, IN-3H06-SQ-XX-OC, Inline 3000 Series On-counter Square Heated, Inline 3000 Series, On-counter Square Heated, Square Heated</p>

References

- [FPG Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.