



FPG INLINE 4000  
Series 1200 in  
Counter/Curved  
Heated Display



## FPG INLINE 4000 Series 1200 in Counter/Curved Heated Display Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 4000 Series 1200 in Counter/Curved Heated Display Owner's Manual 

### Contents

- [1 FPG INLINE 4000 Series 1200 in Counter/Curved Heated Display](#)
- [2 Product Usage Instructions](#)
- [3 FEATURES](#)
- [4 Operational Excellence](#)
- [5 OPTIONS & ACCESSORIES](#)
- [6 Installation note;](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)



**FPG INLINE 4000 Series 1200 in Counter/Curved Heated Display**



## Specifications

- Model: 4000 SERIES 1200
- Type: In-counter/Curved Heated Range Temperature
- Installation: Inline 4000 SERIES
- Heating: Low wattage density element
- Material: Stainless steel and mild steel with toughened safety glass
- Display Area: 1.2 m<sup>2</sup>
- Dimensions: 993mm (H) x 1203mm (W) x 774mm (D)

## Product Usage Instructions

### Installation

1. Ensure the model cutout dimensions are 1180 x 760mm for the IN-4H12-CU-XX-IC model.
2. Follow the installation guide provided in the product manual for proper installation.

### Operation

1. Connect the appliance to a suitable power source as per electrical data specifications.
2. Turn on the appliance using the designated power switch.

### Maintenance

1. Regularly clean the display area and shelves to maintain hygiene.
2. Check for any damage to the glass or steel components and contact FPG for repairs if needed.

## FAQ

### Q: What are the recommended core product temperature settings?

A: The recommended core product temperature can be adjusted based on the specific requirements of the products being displayed.

### Q: How do I change the plug specification for different countries?

A: Please advise your country when purchasing, and FPG can provide the appropriate plug specification for your region.

### Q: Where can I find more technical information and installation guidelines?

A: You can access the Product Manual on the FPG website for detailed technical data and installation guidelines.

<b>RANGE</b>	INLINE 4000 SERIES	
<b>TEMPERATURE</b>	HEATED	
<b>MODEL</b>	IN-4H12-CU-FF-IC	IN-4H12-CU-SD-IC
<b>FRONT</b>	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
<b>INSTALLATION</b>	IN-COUNTER	
<b>HEIGHT</b>	993mm	
<b>WIDTH</b>	1203mm	
<b>DEPTH</b>	774mm	

<b>TEMPERATURE RANGE</b>	+30°C – +90°C
<b>RECOMMENDED CORE PRODUCT TEMPERATURE</b>	+65°C – +80°C
<b>ENVIRONMENTAL TEST CONDITIONS</b>	22°C / 65% RH

## FEATURES

- High energy efficiency: 1.10 kWh per hour (average)
- Cabinet operating temperature range +30°C – +90°C Recommended core product temperature +65°C – +80°C

Smart display with toughened safety glass encased in brushed stainless steel frame

### Fixed Front or Sliding Doors Heated Display

- Three tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and shelves
  - Unique shelf mounted ticket strip front and rear: 30mm
  - Extrusion at the top of the cabinet – front only – is fitted with a stainless steel panel that can be replaced with a branded insert

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with toughened safety glass and double-glazed end panels for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
  - Designed to be installed into joinery

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with sides
- Stainless steel pie chutes
- Additional shelf
- Ticket strip to base: 30mm
- Branded decals/insert
- Rear door or end glass mirror application
- Forward-facing controls
- Custom joinery solution

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-4H12-CU-XX-IC	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H (kW h)	kWh per hour (average )	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG1	HOURS	LUMENS	COLOR
IN-4H12-CU-XX-IC	220-240 V	Single	7.2 A	26.40	1.10	IP 20	3 metre, 3 core cable	10 amp, 3 pin plug	25,000	2758 per metre	Natural

1Please advise country to change plug specification.

## CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-4H12-CU-FF-IC	1.2 m2	3 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-4H12-CU-SD-IC	1.2 m2	3 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel


## DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-4H12-CU-XX-IC	993 x 1203 x 774	140 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

## Installation note;

Model cutout dimensions: IN-4H12-CU-XX-IC models require 1180 x 760mm benchtop cutout (see product manual for installation guide).

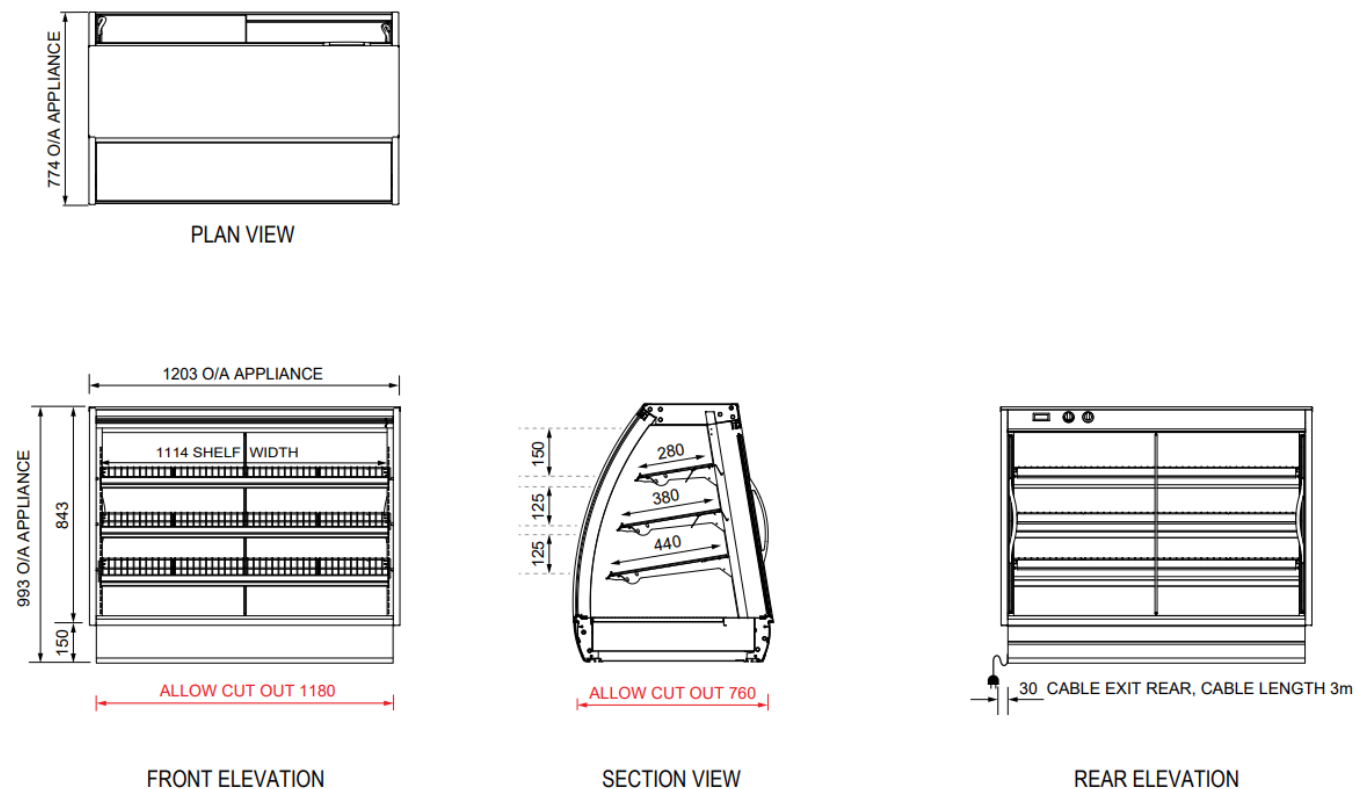


More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.


Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.  
12/24 © 2024 Future Products Group Limited

[FPGWORLD.COM](http://FPGWORLD.COM)

Worldwide  
contact  
details:

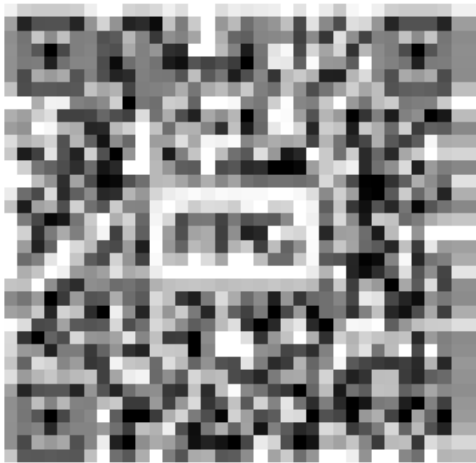

**Documents / Resources**

	<p><b><a href="#">FPG INLINE 4000 Series 1200 in Counter/Curved Heated Display</a></b> [pdf] Owner's Manual IN-4H12-CU-FF-IC, IN-4H12-CU-SD-IC, IN-4H12-CU-XX-IC, INLINE 4000 Series 1200 in Counter Curved Heated Display, INLINE 4000 Series, 1200 in Counter Curved Heated Display, in Counter Curved Heated Display, Curved Heated Display, Heated Display, Display</p>
--	---

**References**

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.