



FPG INLINE 4000
Series 1500 in
Counter/Curved
Heated Counter



FPG INLINE 4000 Series 1500 in Counter/Curved Heated Counter Owner's Manual

[Home](#) » [FPG](#) » FPG INLINE 4000 Series 1500 in Counter/Curved Heated Counter Owner's Manual 

Contents

- 1 FPG INLINE 4000 Series 1500 in Counter/Curved Heated Counter
- 2 Product Usage Instructions
- 3 FEATURES
- 4 OPTIONS & ACCESSORIES
- 5 HEATED DATA
- 6 ELECTRICAL DATA
- 7 CAPACITY, ACCESS & CONSTRUCTION
- 8 DIMENSIONS
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts



FPG INLINE 4000 Series 1500 in Counter/Curved Heated Counter



Product Usage Instructions

Installation

Follow the installation guidelines provided in the product manual. Ensure the benchtop cutout dimensions are 1480mm x 760mm for the IN-4H15-CU-XX-IC model.

Operation

1. Plug in the appliance to a suitable power source using the provided cable.
2. Adjust the temperature settings according to your product requirements.

Troubleshooting

If you encounter any issues with the appliance, refer to the product manual for troubleshooting steps. Contact customer support if problems persist.

Frequently Asked Questions (FAQ)

Q: What should I do if the appliance does not heat up?

A: Check the power connection and ensure the temperature settings are correct. If the issue persists, contact customer support for assistance.

RANGE	INLINE 4000 SERIES	
TEMPERATURE	HEATED	
MODEL	IN-4H15-CU-FF-IC	IN-4H15-CU-SD-IC
FRONT	CURVED/ FIXED FRONT	CURVED/ SLIDING DOORS
INSTALLATION	IN-COUNTER	
HEIGHT	993mm	
WIDTH	1503mm	
DEPTH	774mm	

TEMPERATURE RANGE	+30°C – +90°C
RECOMMENDED CORE PRODUCT TEMPERATURE	+65°C – +80°C
ENVIRONMENTAL TEST CONDITIONS	22°C / 65% RH

FEATURES

High energy efficiency: 0.06 kWh per hour (average)

- Cabinet operating at ambient temperature
- Smart display with toughened safety glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Ambient Display

- Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
- 50,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf mounted ticket strip front and rear: 30mm

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel for durability with toughened safety glass and double-glazed end panels
- Fan assisted air circulation to mitigate heat build-up
- Designed to be installed into joinery

Showing : Inline 4000 Series ambient 1200mm square in-counter fixed front

OPTIONS & ACCESSORIES

Contact a FPG Sales Representative for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Angled base insert
- Branded decals

- Rear door or end glass mirror application
- Forward-facing controls
- Thermal divider panels
- Custom joinery solution

HEATED DATA

MODEL	TEMPERATURE RANGE	RECOMMENDED CORE PRODUCT TEMPERATURE	ENVIRONMENTAL TEST CONDITIONS	HEATING
IN-4H15-CU-XX-IC	+30°C – +90°C	+65°C – +80°C	22°C / 65% RH	Low wattage density element

ELECTRICAL DATA

MODEL	VOLTAGE	PHASE	CURRENT	E24 H(kWh)	kWh per hour (average)	IP RATING	MAINS		LED LIGHTING		
							CONNECTION	CONNECTION PLUG ¹	HOURS	LUMENS	COLOR
IN-4H15-CU-XX-IC	220-240 V	Single	13.4 A	31.20	1.30	IP 20	3 metre, 3 core cable	15 amp, 3 pin plug	25,000	2758 per metre	Natural

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

MODEL	DISPLAY AREA	LEVELS	ACCESS FRONT	ACCESS REAR	CHASSIS CONSTRUCTION
IN-4H15-CU-FF-IC	1.6 m2	3 Shelves	Fixed front	Sliding doors	Stainless 304 and mild steel
IN-4H15-CU-SD-IC	1.6 m2	3 Shelves	Sliding doors	Sliding doors	Stainless 304 and mild steel


DIMENSIONS

MODEL	H x W x D mm (Uncrated)	MASS (Uncrated)
IN-4H15-CU-XX-IC	993 x 1503 x 774	170 kg

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note;

Model cutout dimensions: IN-4H15-CU-XX-IC models require 1480 x 760mm benchtop cutout (see product manual for installation guide).

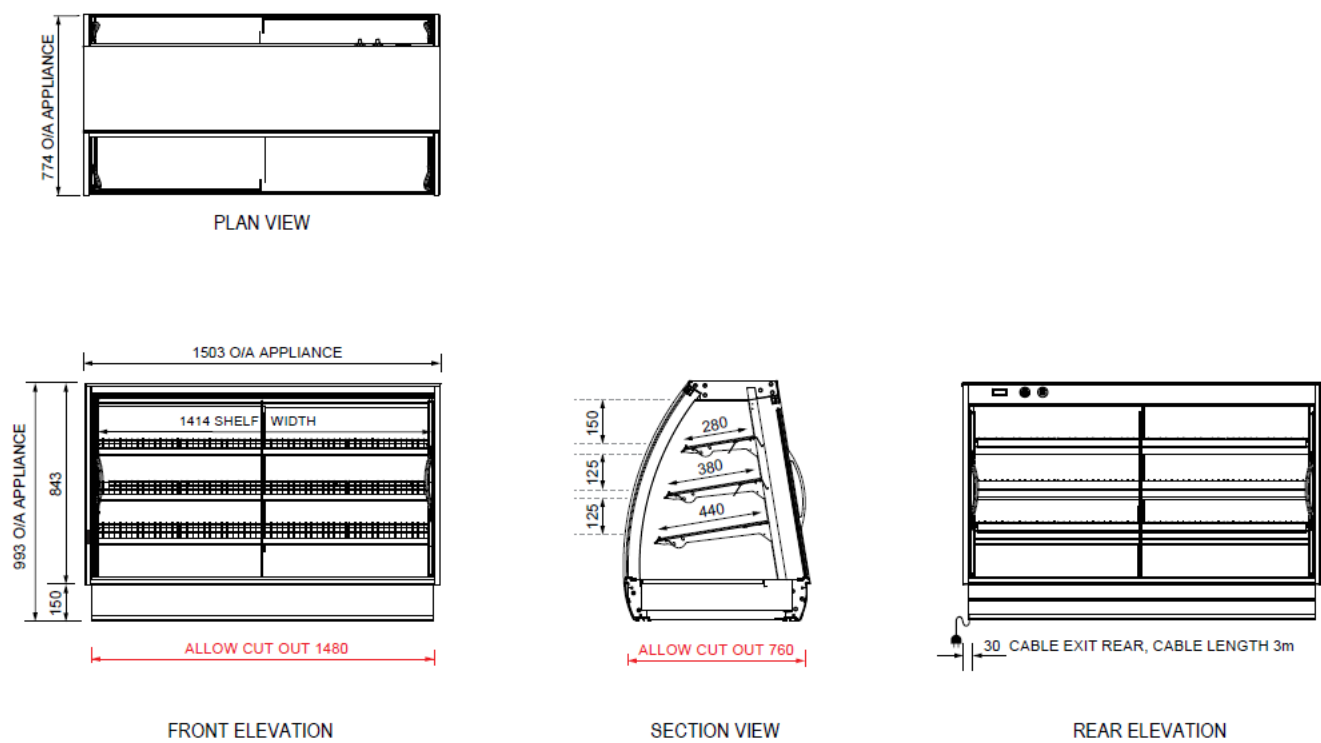

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

12/24 © 2024

Future Products Group Limited



FPGWORLD.COM

Documents / Resources

	<p>FPG INLINE 4000 Series 1500 in Counter/Curved Heated Counter [pdf] Owner's Manual</p> <p>IN-4H15-CU-FF-IC, IN-4H15-CU-SD-IC, IN-4H15-CU-XX-IC, INLINE 4000 Series 1500 in Counter Curved Heated Counter, INLINE 4000 Series, 1500 in Counter Curved Heated Counter, in Counter Curved Heated Counter, Curved Heated Counter, Heated Counter, Counter</p>
--	---

References

-  [Home - FPG | Food Display Solutions](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.